Indoor

CEILING RECESSED
54 – 173



trimless 57 | 59 | trimless 61 | 61 | trimless 63 | 63 | 67 | trimless 71



71 | 75 | 77 | 83 | 85 | trimless 87 | trimless 89 | trimless 91 | 93



97 | 99 | 101 | 103 | 105 | 107 | 109 | 111 | 113



113 | 115 | 117 | 119 | 123 | 125 | 127 | 129 | 131



135 | 137 | 143 | 143 | trimless 145 | 145 | 147 | IP44 151 | IP44 153



IP44 155 | IP65 157 | IP65 159 | IP44 \| IP65 161 | IP44 163 | IP65 165 | IP44 167 | IP44 169 | IP44 171

CEILING SURFACE
174 – 307



IP44 171 | IP44 173 | 177 | 179 | 181 | 189 | 193 | 199



201 | 203 | 205 | 211 | 213 | 215 | 221 | 223 | 227



229 | 231 | 235 | 239 | 241 | 243 | 245 | 247 | 251



253 | 255 | 257 | 261 | 263 | 267 | 269 | 271 | 273



275 | 277 | 279 | 283 | 287 | 289 | 291 | 293 | 295



297 | 297 | 299 | 301 | 303 | 305 | 307

STREX 48V-TRACK
312 – 359

313



321 | 325 | 327 | 329 | 331 | 333 | 335 | 337 | 339



341 | 343 | 343 | 345 | 347 | 351 | 353 | 357 | 359

Indoor

1-PHASE TRACK
360 – 383



361 363 365 369 371 373 375 377



375 377 379 383

3-PHASE TRACK
384 – 395



385 387 389 391 393 391 393 395

SYSTEM
396 – 411



397 401 405 409

CEILING SUSPENDED
412 – 565



415 417 421 423 427 433 437 441



445 449 453 457 459 461 463 465 467



479 489 495 499 503 505 | 531 533 507 | 535 537

509 511 | 547 517 | 539 521 523 549 557 561 563

WALL RECESSED
566 – 581



569 571 573 575 575 577 579 581

WALL SURFACE
582 – 711



585 589 591 593 595 599 605 607



609 611 613 615 617 619 621 623 625



631 633 639 643 647 649 651 663 667



669 671 673 679 681 683 685 687 689



691 693 695 697 701 705 707 709 711

Indoor

TABLE
712 – 725



715 717 719 721 723 725

FLOOR
726 – 735



715 727 729 731 733 735

SOFT ACOUSTICS



285 471 475 477 525 629 657

Outdoor

CEILING RECESSED
738 – 749



741 743 745 747 749

CEILING SURFACE
750 – 775



753 755 757 759 761 763 765 767



769 771 775

CEILING SUSPENDED
776 – 777

777

Outdoor

WALL RECESSED
778 – 787



781 785

WALL SURFACE
788 – 835



791 793 797 799 803 805 807 809



811 815 817 819 821 823 825 827 829



829 831 833 835

FLOOR RECESSED
836 – 853



839 839 843 845 849 851 853

FLOOR SURFACE
854 – 891



857 859 863 865 867 869 871 873

X-BEAM



877 881 885 887 889

Highlight families

CENO



131 181 321 585

MATCH



61 137 193 329 347 | 509 415 571 589



685 723 729

TRACE



261 269 273 331 351 | 511 417 591 595

FINLIN



263 433 673 679 727

ODREY



353 379 517 599

LECA



135 189 325 569

PERLEZ



169 271 275 295 701 703

ROOMOR



293 395 495 499 639 725 735

DRO



279 373 465 623 715 717 731

MIRRO



283 285 467 471 625 629 721 733

J.J.W.



289 479 481 633 635

CLEA



287 557 631

TRADORA



775 777 823

indoor

Ceiling recessed

54 – 173

SPOT LIGHTS


57


59

61

61


63


63


67

LINOO
71


71


75


77


83


85


87


89


91


93


97


99


101


103


105


107


109


111


113


113


115


117


119


123


125


127


129

SEMI RECESSED


131


135


137


137


143


143

145

145

147

IP-RATED

151

IP44
153

IP44
155

IP65
157

IP65
159

IP65 | IP44
161

IP44
163

IP65
165

IP44
167

IP44
169

IP44
171

IP44
171

IP44
173

back











ø73

1.0 TRIMLESS

LED COB 5W | 250mA | 18V
aluminium

IP20 0°-35°|360° M-31° L80|50K

	EUR
	128,00
	144,00
	144,00
	144,00
	144,00
	128,00

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	420 | >90	3
3000K	440 | >90	5

ALWAYS USE

alu plasterkit 78-80 80 12.5, 15, 20, 25

	EUR
	22,00

quick connect driver | 250mA

	EUR
5W dim	33,00
10W DALI*	64,50

*revision opening required
more options and specs on page 895





OPTIONAL

honeycomb louver

	EUR
	14,50











35

ø76

1.0

LED COB 5W | 250mA | 18V
aluminium

IP20 0°-35°|360° M-31° L80|50K

blade springs 68-70 60 2-25

	EUR
	118,00
	134,00
	134,00
	134,00
	134,00
	118,00

LIGHT COLOUR	LUMEN|CRI	CODE
2700K	420|>90	3
3000K	440|>90	5

ALWAYS USE

quick connect driver | 250mA

	EUR
5W dim	33,00
10W DALI*	64,50

*revision opening required
more options and specs on page 895

















OPTIONAL

honeycomb louver

	EUR
	14,50

back



PRIVATE RESIDENCE GREECE

reddot winner 2023





ø26



ø35



ø45

1.0 TRIMLESS

LED COB 5W | 250mA | 17V
aluminium

IP20 M-32° L80|50K

45-47 60 4-26

	EUR	CODE
	82,50	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	315	>90	3
3000K	335	>90	5

1.0

LED COB 5W | 250mA | 17V
aluminium

IP20 M-32° L80|50K

wire springs 28-31 50 4-25

	EUR	CODE
	52,00	
	52,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	315	>90	3
3000K	335	>90	5

1.0 IP44

LED COB 5W | 250mA | 17V
aluminium

IP44 M-32° L80|50K

wire springs 40-41 68 4-25

	EUR	CODE
	65,00	
	65,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	295	>90	3
3000K	325	>90	5



LOXONE VERSIONS ONLINE

ALWAYS USE

quick connect driver | 250mA

	EUR	CODE
5W dim	33,00	
10W DALI	64,50	

revision opening required
more options and specs on page 895

ALWAYS USE

quick connect driver | 250mA

	EUR	CODE
5W dim	33,00	
10W DALI	64,50	

revision opening required
more options and specs on page 895

ALWAYS USE

quick connect driver | 250mA

	EUR	CODE
5W dim | IP20	33,00	
10W DALI | IP20*	64,50	

*revision opening required
more options and specs on page 895

193
329 | 347
415 | 509
571
589 | 685
723 | 729



RESTAURANT AUX PETITS OIGNONS | COVARTE JODOIGNE | BELGIUM

















OPTIONAL

honeycomb louver

	EUR	CODE
	14,50	

LOXONE VERSIONS ONLINE

1.0 TRIMLESS

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-60°|355° M-31° L70|55K

	EUR	CODE
	149,00	
	149,00	
	149,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	495	>90	3
3000K	530	>90	5
2000-3000K | 16V	340	>90	9

ALWAYS USE

alu plasterkit 78-80 85 12.5, 15, 20, 25

	EUR	CODE
	22,00	

quick connect driver | 350mA

	EUR	CODE
6W	25,50	
10W dim	35,50	
14W DALI	64,50	

*revision opening required and more options and specs on page 898

1.0

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-60°|355° M-31° L70|55K

wire springs 86-89 60 4-23

	EUR	CODE
	139,00	
	139,00	
	139,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	495	>90	3
3000K	530	>90	5
2000-3000K | 16V	340	>90	9

ALWAYS USE

quick connect driver | 350mA

	EUR	CODE
6W	25,50	
10W dim	35,50	
14W DALI*	64,50	

*revision opening required and more options and specs on page 898

2.0

2x LED COB 6W | 700mA | 17V
aluminium

IP20 0°-60°|355° M-31° L70|55K

wire springs 87x176 60 4-23

	EUR	CODE
	238,00	
	238,00	
	238,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x495	>90	3
3000K	2x530	>90	5

ALWAYS USE

driver | 700mA | only 1x needed

	EUR	CODE
14W dim	39,00	
28W DALI	67,00	

more options and specs on page 900











MORE VERSIONS + LOXONE ONLINE

IC rated



1.0 LED

LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 0°-60°|355° M-33° L80|55K

wire springs 127 75 4-25

	EUR	CODE
	209,00	
	209,00	
	209,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	600/810	>90	3
3000K	635/855	>90	5
4000K	670/905	>90	7
2000-3000K	445/660	>90	9

LED module 20 years replaceability

ALWAYS USE

quick connect driver | 500mA

	EUR	CODE
10W	25,50	
10W dim	37,50	
15W DALI	64,50	

more options and specs on page 898



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-60°|350°

wire springs 127 75 4-25

	EUR	CODE
	148,00	
	148,00	
	148,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905















1.0 TRIMLESS

LED PCB 3W | 350mA | 6V
aluminium | polycarbonate
light colour selectable via dip switch

IP20 M-39° L80|50K

wire springs 54-58 60 4-26

2700K/3000K | CRI >90 | 125lm

	EUR	CODE
	88,00	
	88,00	

ALWAYS USE

driver | 350mA

	EUR	CODE
3.5W	34,00	
7W dim*	33,50	
14W DALI*	64,50	

*revision opening required and
2 fixtures needed
more options and specs on page 896

1.0

LED PCB 3W | 350mA | 6V
aluminium | polycarbonate
light colour selectable via dip switch

IP20 M-39° L80|50K

wire springs 36x39 60 4-28

2700K/3000K | CRI >90 | 125lm

	EUR	CODE
	56,00	
	56,00	

ALWAYS USE

driver | 350mA

	EUR	CODE
3.5W	34,00	
7W dim*	33,50	
14W DALI*	64,50	

*revision opening required and
2 fixtures needed
more options and specs on page 896

2.0

LED PCB 5W | 350mA | 12V
aluminium | polycarbonate
light colour selectable via dip switch

IP20 M-39° L80|50K

wire springs 36x67 60 4-28

2700K/3000K | CRI >90 | 2x125lm

	EUR	CODE
	75,00	
	75,00	

ALWAYS USE

driver | 350mA

	EUR	CODE
6W	25,50	
7W dim*	33,50	
14W DALI*	64,50	

*revision opening required
more options and specs on page 896



















4.0

LED PCB 8W | 350mA | 22V
aluminium | polycarbonate
light colour selectable via dip switch

IP20 M-39° L80|50K

wire springs 118x36 60 4-28

2700K/3000K | CRI >90 | 4x125lm

	EUR	CODE
	98,00	
	98,00	

ALWAYS USE

driver | 350mA

	EUR	CODE
10W dim	35,50	
14W DALI	64,50	

more options and specs on page 896

4.1

LED PCB 8W | 350mA | 22V
aluminium | polycarbonate
light colour selectable via dip switch

IP20 M-39° L80|50K

wire springs 63x59 60 4-28

2700K/3000K | CRI >90 | 4x125lm

	EUR	CODE
	92,00	
	92,00	

ALWAYS USE

driver | 350mA

	EUR	CODE
10W dim	35,50	
14W DALI	64,50	

more options and specs on page 896

8.0

LED PCB 16W | 700mA | 22V
aluminium | polycarbonate
light colour selectable via dip switch

IP20 M-39° L80|50K

wire springs 226x36 60 4-28

2700K/3000K | CRI >90 | 8x125lm

	EUR	CODE
	158,00	
	158,00	

ALWAYS USE

driver | 700mA

	EUR	CODE
20W dim	45,50	
14W DALI	67,00	

more options and specs on page 900



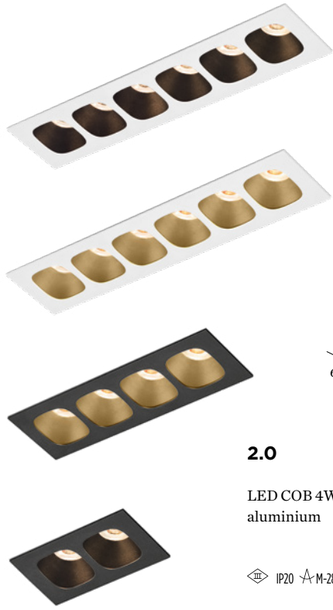







2.0

LED COB 4W | 350mA | 12V
aluminium

IP20 M-28° L80|50K

wire springs 64x33 60 4-25

	EUR	CODE
	82,00	
	82,00	
	82,00	
	82,00	

LIGHT COLOUR	LUMEN|CRI	CODE
2700K	2x160|>90	3
3000K	2x165|>90	5

ALWAYS USE

driver | 350mA

	EUR	CODE
4.5W dim	33,00	
14W DALI	64,50	

revision opening required
more options and specs on page 897

4.0

LED COB 8W | 350mA | 24V
aluminium

IP20 M-28° L80|50K

wire springs 116x33 60 4-25

	EUR	CODE
	128,00	
	128,00	
	128,00	
	128,00	

LIGHT COLOUR	LUMEN|CRI	CODE
2700K	4x160|>90	3
3000K	4x165|>90	5

ALWAYS USE

driver | 350mA

	EUR	CODE
10W dim	35,50	
14W DALI	64,50	

more options and specs on page 896

6.0

LED COB 12W | 350mA | 36V
aluminium

IP20 M-28° L80|50K

wire springs 168x33 60 4-25

	EUR	CODE
	178,00	
	178,00	
	178,00	
	178,00	

LIGHT COLOUR	LUMEN|CRI	CODE
2700K	6x160|>90	3
3000K	6x165|>90	5

ALWAYS USE

driver | 350mA

	EUR	CODE
13W dim	42,50	
14W DALI	64,50	

more options and specs on page 896





LOXONE VERSIONS ONLINE



LA PARISIENNE | I:ARHITEKT LJUBOVIC | MONTENEGRO









1.0

LED COB 5W | 500mA | 9V
aluminium

IP20 M-32° L70|55K

wire springs 50x50 60 4-25

	EUR	CODE
	78,00	
	78,00	
	78,00	
	78,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	395	>90	3
3000K	410	>90	5

ALWAYS USE

driver | 500mA

	EUR	CODE
6W	33,00	
6.5W dim*	25,50	
24W DALI*	67,00	

*revision opening required
more options and specs on page 897

2.0

LED COB 9W | 500mA | 18V
aluminium

IP20 M-32° L70|55K

wire springs 93x50 60 4-25

	EUR	CODE
	98,00	
	98,00	
	98,00	
	98,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x395	>90	3
3000K	2x410	>90	5

ALWAYS USE

driver | 500mA

	EUR	CODE
10W	25,50	
10W dim	37,50	
24W DALI	67,00	

more options and specs on page 897







PRIVATE RESIDENCE | INTERIOR STUDIO VAN MAANEN THE NETHERLANDS

Ceiling recessed

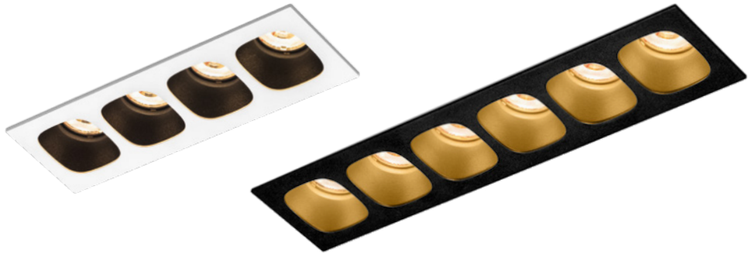





4.0

LED COB 17W | 500mA | 36V
aluminium

IP20 M-32° L70|55K

wire springs 181x50 60 4-25

	EUR	CODE
	149,00	
	149,00	
	149,00	
	149,00	

LIGHT COLOUR	LUMEN|CRI	CODE
2700K	4x395|>90	3
3000K	4x410|>90	5

ALWAYS USE

driver | 500mA | only 1x needed

	EUR	CODE
17.5W	39,00	
19W dim	45,50	
24W DALI	67,00	

more options and specs on page 898

6.0

LED COB 25W | 500mA | 2x27V
aluminium

IP20 M-32° L70|55K

wire springs 269x50 60 4-25

	EUR	CODE
	198,00	
	198,00	
	198,00	
	198,00	

LIGHT COLOUR	LUMEN|CRI	CODE
2700K	6x395|>90	3
3000K	6x410|>90	5

ALWAYS USE

driver | 500mA | 2x needed

	EUR	CODE
17.5W	39,00	
19W dim	45,50	
24W DALI	67,00	

more options and specs on page 898






Kingsley
Anne



PRIVATE RESIDENCE | ANKER & CO DENMARK











1.0

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-25°|355° M-31° L70|55K

wire springs 54x59 65 2-22

	EUR	CODE
	98,00	
	98,00	
	98,00	

LIGHT COLOUR	LUMEN|CRI	CODE
2700K	550|>90	3
3000K	580|>90	5
2000-3000K | 16V	465|>90	9

LED module 20 years replaceability

ALWAYS USE

quick connect driver | 350mA

	EUR	CODE
6W	25,50	
10W dim	35,50	
14W DALI*	64,50	

*revision opening required
more options and specs on page 896

2.0

2x LED COB 6W | 350mA | 17V
aluminium

IP20 0°-25°|355° M-31° L70|55K

wire springs 54x110 65 2-22

	EUR	CODE
	169,00	
	169,00	
	169,00	

LIGHT COLOUR	LUMEN|CRI	CODE
2700K	2x550|>90	3
3000K	2x580|>90	5
2000-3000K | 16V	2x465|>90	9

LED module 20 years replaceability

ALWAYS USE

quick connect driver | 350mA
2x needed

	EUR	CODE
6W	25,50	
10W dim	35,50	
14W DALI	64,50	

more options and specs on page 896

3.0

3x LED COB 6W | 350mA | 17V
aluminium

IP20 0°-25°|355° M-31° L70|55K

wire springs 54x162 65 2-22

	EUR	CODE
	238,00	
	238,00	
	238,00	

LIGHT COLOUR	LUMEN|CRI	CODE
2700K	3x550|>90	3
3000K	3x580|>90	5
2000-3000K | 16V	3x465|>90	9

LED module 20 years replaceability

ALWAYS USE

quick connect driver | 350mA
3x needed

	EUR	CODE
6W	25,50	
10W dim	35,50	
14W DALI	64,50	

more options and specs on page 896





MORE VERSIONS + LOXONE ONLINE



PRIVATE RESIDENCE | STUDIO BENOIT BELGIUM



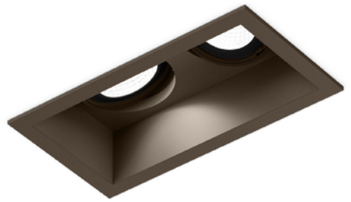









1.0 LED

LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 0°-35°|355° M-34° L80|55K

wire springs 74x78 95 2-18

	EUR	CODE
	103,00	
	103,00	
	103,00	

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	610/820 | >90	3
3000K	645/870 | >90	5
2000-3000K	450/665 | >90	9

LED module 20 years replaceability

ALWAYS USE

quick connect driver | 500mA

	EUR	CODE
10W	25,50	
10W dim	37,50	
15W DALI	64,50	

more options and specs on page 898

2.0 LED

2x LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 0°-35°|355° M-34° L80|55K

wire springs 74x148 95 2-18

	EUR	CODE
	189,00	
	189,00	
	189,00	

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	2x610/820 | >90	3
3000K	2x645/870 | >90	5
2000-3000K	2x450/665 | >90	9

LED module 20 years replaceability

ALWAYS USE

quick connect driver | 500mA
2x needed

	EUR	CODE
10W	25,50	
10W dim	37,50	
15W DALI	64,50	

more options and specs on page 898

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-35°|355°

wire springs 74x78 125 2-18

	EUR	CODE
	49,00	
	49,00	
	49,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905

2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-35°|355°

wire springs 74x148 125 2-18

	EUR	CODE
	82,00	
	82,00	
	82,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905



PRIVATE RESIDENCE SPAIN













1.0 TRIMLESS

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-25°|355°- M-31° L80|55K

	EUR	CODE
	103,00	
	103,00	
	103,00	
	103,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	550	>90	3
3000K	580	>90	5
2000-3000K	465	>90	9

LED module 20 years replaceability

ALWAYS USE

alu plasterkit U64x64 65 7-32

	EUR	CODE
	37,00	

quick connect driver | 350mA

	EUR	CODE
6W	25,50	
10W dim	35,50	
14W DALI	64,50	

more options and specs on page 896

2.0 TRIMLESS

2x LED COB 6W | 350mA | 17V
aluminium

IP20 0°-25°|355°- M-31° L80|55K

	EUR	CODE
	178,00	
	178,00	
	178,00	
	178,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x550	>90	3
3000K	2x580	>90	5
2000-3000K	2x465	>90	9

LED module 20 years replaceability

ALWAYS USE

alu plasterkit U64x117 65 7-32

	EUR	CODE
	39,00	

quick connect driver | 350mA
2x needed

	EUR	CODE
6W	25,50	
10W dim	35,50	
14W DALI	64,50	

more options and specs on page 897

3.0 TRIMLESS

3x LED COB 6W | 350mA | 17V
aluminium

IP20 0°-25°|355°- M-31° L80|55K

	EUR	CODE
	251,00	
	251,00	
	251,00	
	251,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	3x550	>90	3
3000K	3x580	>90	5
2000-3000K	3x465	>90	9

LED module 20 years replaceability

ALWAYS USE

alu plasterkit U64x169 65 7-32

	EUR	CODE
	43,00	

quick connect driver | 350mA
3x needed

	EUR	CODE
6W	25,50	
10W dim	35,50	
14W DALI	64,50	

more options and specs on page 896



LOXONE VERSIONS ONLINE







1.0 LED

LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 0°-35°|355° M-34° L80|55K

	EUR	CODE
	111,00	
	111,00	
	111,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	610/820	>90	3
3000K	645/870	>90	5
2000-3000K	450/665	>90	9

LED module 20 years replaceability

ALWAYS USE

alu plasterkit 86x86 95 7-32

	EUR	CODE
	41,00	

quick connect driver | 500mA

	EUR	CODE
10W	25,50	
10W dim	37,50	
15W DALI	64,50	

more options and specs on page 898





2.0 LED

2x LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 0°-35°|355° M-34° L80|55K

	EUR	CODE
	210,50	
	210,50	
	210,50	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x610/820	>90	3
3000K	2x645/870	>90	5
2000-3000K	2x450/665	>90	9

LED module 20 years replaceability

ALWAYS USE

alu plasterkit 86x156 95 7-32

	EUR	CODE
	45,00	

quick connect driver | 500mA
2x needed

	EUR	CODE
10W	25,50	
10W dim	37,50	
15W DALI	64,50	

more options and specs on page 898



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-35°|355°

	EUR	CODE
	57,00	
	57,00	
	57,00	

ALWAYS USE

alu plasterkit 86x86 125 7-32

	EUR	CODE
	41,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905



2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-35°|355°

	EUR	CODE
	103,50	
	103,50	
	103,50	

ALWAYS USE

alu plasterkit 86x156 125 7-32

	EUR	CODE
	45,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905



PRIVATE RESIDENCE | STUDIO BENOIT BELGIUM











1.0 TRIMLESS

LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 0°-35°|355° M-30° L80|55K

	EUR	CODE
	124,00	
	127,00	
	124,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	340/460	>90	3
3000K	360/485	>90	5
2000-3000K	250/370	>90	9

LED module 20 years replaceability

ALWAYS USE

alu plasterkit 86x86 95 7-32

	EUR	CODE
	41,00	

quick connect driver | 500mA

	EUR	CODE
10W	25,50	
10W dim	37,50	
15W DALI	64,50	

more options and specs on page 898

2.0 TRIMLESS

2x LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 0°-35°|355° M-30° L80|55K

	EUR	CODE
	236,50	
	242,50	
	236,50	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x340/460	>90	3
3000K	2x360/485	>90	5
2000-3000K	2x250/370	>90	9

LED module 20 years replaceability

ALWAYS USE

alu plasterkit 86x156 95 7-32

	EUR	CODE
	45,00	

quick connect driver | 500mA
2x needed

	EUR	CODE
10W	25,50	
10W dim	37,50	
15W DALI	64,50	

more options and specs on page 898

LOXONE VERSIONS ONLINE



PRIVATE RESIDENCE | RARDO ARCHITECTS SPAIN









1.0

LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 0°-35°|355° M-30° L80|55K

wire springs 74x78 95 2-18

	EUR	CODE
	116,00	
	119,00	
	116,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	340/460	>90	3
3000K	360/485	>90	5
2000-3000K	250/370	>90	9

LED module 20 years replaceability

ALWAYS USE

quick connect driver | 500mA

	EUR	CODE
10W	25,50	
10W dim	37,50	
15W DALI	64,50	

more options and specs on page 898

2.0

2x LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 0°-35°|355° M-30° L80|55K

wire springs 74x148 95 2-18

	EUR	CODE
	215,00	
	221,00	
	215,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x340/460	>90	3
3000K	2x360/485	>90	5
2000-3000K	2x250/370	>90	9

LED module 20 years replaceability

ALWAYS USE

quick connect driver | 500mA
2x needed

	EUR	CODE
10W	25,50	
10W dim	37,50	
15W DALI	64,50	

more options and specs on page 898

LOXONE VERSIONS ONLINE









1.0

LED COB 5W | 250mA | 17V
aluminium

IP20 M-32° L80|50K

wire springs 40-41 68 4-25

	EUR	CODE
	49,00	
	49,00	
	49,00	
	49,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	405	>90	3
3000K	425	>90	5

ALWAYS USE

quick connect driver | 250mA

	EUR	CODE
5W dim	33,00	
10W DALI	64,50	

revision opening required
more options and specs on page 895

1.0 IP44

LED COB 5W | 250mA | 17V
aluminium

IP44 M-32° L80|50K

wire springs 40-41 68 4-25

	EUR	CODE
	62,00	
	62,00	
	62,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	355	>90	3
3000K	400	>90	5

ALWAYS USE

quick connect driver | 250mA

	EUR	CODE
5W dim	33,00	
10W DALI	64,50	

revision opening required
more options and specs on page 895

LOXONE VERSIONS ONLINE

IC rated



PRIVATE RESIDENCE | ARNOLD ORY FRANCE









1.0

LED COB 4W | 250mA | 17V
aluminium

IP20 M-31° L80|50K

wire springs 50-52 85 4-25

	EUR	CODE
	57,00	
	57,00	
	57,00	
	57,00	
	57,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	480	>90	3
3000K	510	>90	5

ALWAYS USE

quick connect driver | 250mA

	EUR	CODE
5W dim	33,00	
10W DALI*	64,50	

*revision opening required
more options and specs on page 895

2.0

2x LED COB 4W | 250mA | 34V
aluminium

IP20 M-31° L80|50K

wire springs 50-52x100-104 67 4-25

	EUR	CODE
	109,00	
	109,00	
	109,00	
	109,00	
	109,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x480	>90	3
3000K	2x510	>90	5

ALWAYS USE

quick connect driver | 250mA
only 1x needed

	EUR	CODE
10.5W dim	33,00	
10W DALI	64,50	

more options and specs on page 895





MORE VERSIONS + LOXONE ONLINE





1.0

LED COB 3W | 200mA | 18V
recycled PET for RP
others 3D printed ASA

IP20 W-41° L80|80K

blade springs 74-76 .85 min.8

	EUR	CODE
	88,00	
	88,00	
	88,00	
	88,00	

LIGHT COLOUR	LUMEN|CRI	CODE
2700K	360|>90	3
3000K	370|>90	5

ALWAYS USE

quick connect driver | 200mA

	EUR	CODE
10W dim*	33,00	
8W DALI	64,50	

*min. 2 luminaires per driver
more options and specs on page 894

high efficient LED

reduced CO_2

3D printed by IQ LUX

MORE VERSIONS ONLINE

back



PRIVATE RESIDENCE | ROOD3 INTERIEURONTWERP BELGIUM









LOXONE VERSIONS ONLINE









1.0

LED COB 6W | 350mA | 17V
aluminium

IP20 M-31° L80|50K

wire springs Ø68-70 60 4-23

	EUR	CODE
	79,00	
	79,00	
	79,00	
	79,00	
	79,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	615	>90	3
3000K	650	>90	5
2000-3000K | 16V	465	>90	9

ALWAYS USE

quick connect driver | 350mA

	EUR	CODE
6W	25,50	
10W dim	35,50	
14W DALI*	64,50	

*revision opening required
more options and specs on page 896

1.0 IP65

LED COB 6W | 350mA | 17V
aluminium

IP65 M-31° L80|50K

wire springs Ø68-70 60 4-25

	EUR	CODE
	96,00	
	96,00	
	96,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	590	>90	3
3000K	615	>90	5

ALWAYS USE

driver | 350mA

	EUR	CODE
6W | IP20	25,50	
10w dim | IP20	35,50	
17W | IP68*	69,00	

*revision opening required
more options and specs on page 896

743











1.0

LED COB 6W | 180mA | 36V
recycled PET for RP
others 3D printed ASA

IP20 M-40° L80|80K

blade springs 85-87 77 min.8

	EUR	CODE
	105,00	
	105,00	
	105,00	
	105,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	780	>90	3
3000K	800	>90	5

ALWAYS USE

quick connect driver | 180mA

	EUR	CODE
7.5W dim	33,00	
7.2W DALI	64,50	

more options and specs on page 894

high efficient LED

reduced CO_2

3D printed by IQ LUX

MORE VERSIONS ONLINE

back



LOOTENS | OR ARCHITECTEN | WIM LAHOUSSE HARELBEKE | BELGIUM



MORE VERSIONS + LOXONE ONLINE





1.0 LED

LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 M-34° L80|55K

wire springs 76-79 90 4-27

	EUR	CODE
	95,00	
	95,00	
	95,00	
	95,00	
	95,00	

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	635/855 | >90	3
3000K	670/905 | >90	5
4000K	710/955 | >90	7
2000-3000K	470/695 | >90	9

LED module 20 years replaceability

ALWAYS USE

quick connect driver | 500mA

	EUR	CODE
10W	25,50	
10W dim	37,50	
15W DALI	64,50	

more options and specs on page 898

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

wire springs 76-79 115 4-27

	EUR	CODE
	29,00	
	29,00	
	29,00	
	29,00	
	29,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905



PRIVATE RESIDENCE | STUDIO ZUYD THE NETHERLANDS



MORE VERSIONS + LOXONE ONLINE





1.0 LED

LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 M-34° L80|55K

wire springs 76-79 90 4-38

	EUR	CODE
	102,50	
	102,50	
	102,50	
	102,50	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	635/850	>90	3
3000K	670/900	>90	5
2000-3000K	470/695	>90	9

LED module 20 years replaceability

ALWAYS USE

quick connect driver | 500mA

	EUR	CODE
10W	25,50	
10W dim	37,50	
15W DALI	64,50	

more options and specs on page 898

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

wire springs 76-79 120 4-38

	EUR	CODE
	48,50	
	48,50	
	48,50	
	48,50	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905











1.0

LED COB 3W | 200mA | 18V
recycled PET for RP
others 3D printed ASA

IP20 0°-25°|360° W-41° L80|80K

blade springs 74-76 87 min.8

	EUR	CODE
	98,00	
	98,00	
	98,00	
	98,00	

LIGHT COLOUR	LUMEN|CRI	CODE
2700K	360|>90	3
3000K	370|>90	5

ALWAYS USE

quick connect driver | 200mA

	EUR	CODE
10W dim*	33,00	
8W DALI	64,50	

*2 luminaires per driver
more options and specs on page 894







MORE VERSIONS ONLINE













MORE VERSIONS + LOXONE ONLINE





1.0 TRIMLESS

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-35°|360° M-31° L70|50K

	EUR	CODE
	93,00	
	93,00	
	93,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	555	>90	3
3000K	585	>90	5
2000-3000K | 16V	470	>90	9

LED module 20 years replaceability

ALWAYS USE

alu plasterkit 78-80 65 12.5, 15, 20, 25

	EUR	CODE
	22,00	

quick connect driver | 350mA

	EUR	CODE
6W	25,50	
10W dim	35,50	
14W DALI*	64,50	

*revision opening required and
more options and specs on page 896

1.0

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-35°|355° M-31° L70|50K

wire springs 68-70 65 4-23

	EUR	CODE
	89,50	
	89,50	
	89,50	
	89,50	
	89,50	
	89,50	
	89,50	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	555	>90	3
3000K	585	>90	5
2000-3000K | 16V	470	>90	9

LED module 20 years replaceability

ALWAYS USE

quick connect driver | 350mA

	EUR	CODE
6W	25,50	
10W dim	35,50	
14W DALI*	64,50	

*revision opening required and
more options and specs on page 896











1.0

LED COB 6W | 180mA | 36V
recycled PET for RP
others 3D printed ASA

IP20 0°-21°|360° M-40° L80|80K

blade springs 85-87 85 min.8

	EUR	CODE
	116,00	
	116,00	
	116,00	
	116,00	

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	780 | >90	3
3000K	800 | >90	5

ALWAYS USE

quick connect driver | 180mA

	EUR	CODE
7W dim	33,00	
7.2W DALI	64,50	

more options and specs on page 894

MORE VERSIONS ONLINE

high efficient LED

reduced CO_2

3D printed by IQ LUX

back











MORE VERSIONS + LOXONE ONLINE



1.0 LED

LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 0°-35°|355° M-34° L80|55K

	EUR	CODE
	110,00	
	110,00	
	110,00	
	110,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	635/855	>90	3
3000K	670/905	>90	5
4000K	710/955	>90	7
2000-3000K	470/695	>90	9

LED module 20 years replaceability

ALWAYS USE

alu plasterkit ⌀105-110 95 12.5, 15, 20, 25

	EUR	CODE
	26,00	

quick connect driver | 500mA

	EUR	CODE
10W	25,50	
10W dim	37,50	
15W DALI	64,50	

more options and specs on page 898



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-35°|355°

	EUR	CODE
	56,00	
	56,00	
	56,00	
	56,00	

ALWAYS USE

alu plasterkit ⌀105-110 120 12.5, 15, 20, 25

	EUR	CODE
	26,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905



PRIVATE RESIDENCE | AJ ARCHITECTEN BELGIUM









MORE VERSIONS + LOXONE ONLINE





1.0 LED

LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 0°-35°|355° M-34° L80|55K

wire springs 86-89 90 4-23

	EUR	CODE
	98,50	
	98,50	
	98,50	
	98,50	
	98,50	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	635/855	>90	3
3000K	670/905	>90	5
4000K	710/955	>90	7
2000-3000K	470/695	>90	9

LED module 20 years replaceability

ALWAYS USE

quick connect driver | 500mA

	EUR	CODE
10W	25,50	
10W dim	37,50	
15W DALI	64,50	

more options and specs on page 898

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-35°|355°

wire springs 86-89 115 4-23

	EUR	CODE
	44,50	
	44,50	
	44,50	
	44,50	
	44,50	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905



PRIVATE RESIDENCE | INTÉRIEURS D'ARCHITECTES FRANCE







2.0 LED

2x LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 0°-35°|355° M-34° L80|55K

wire springs 89x172-178 90 4-23

	EUR	CODE
	192,00	
	192,00	
	192,00	
	192,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x635/855	>90	3
3000K	2x670/905	>90	5
4000K	2x710/955	>90	7
2000-3000K	2x470/695	>90	9

LED module 20 years replaceability

2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-35°|355°

wire springs 89x172-178 115 4-23

	EUR	CODE
	85,00	
	85,00	
	85,00	
	85,00	

ALWAYS USE

quick connect driver | 500mA
2x needed

	EUR	CODE
10W	25,50	
10W dim	37,50	
15W DALI	64,50	

more options and specs on page 898

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905

LOXONE VERSIONS ONLINE





1.0

LED COB 5W | 250mA | 17V
aluminium

IP20 M-32° L80|50K

wire springs 48-51 60 4-25

	EUR	CODE
	55,00	
	55,00	
	55,00	

LIGHT COLOUR	LUMEN|CRI	CODE
2700K	405|>90	3
3000K	425|>90	5





ALWAYS USE

quick connect driver | 250mA

	EUR	CODE
5W dim	33,00	
10W DALI*	64,50	

*revision opening required
more options and specs on page 895

MORE VERSIONS + LOXONE ONLINE

back







LOXONE VERSIONS ONLINE







1.0

LED COB 6W | 350mA | 17V
aluminium

IP20 M-31° L80|50K

wire springs 68-70 51 4-24

	EUR	CODE
	86,00	
	86,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	650	>90	3
3000K	685	>90	5
2000K-3000K | 16V	495	>90	9

ALWAYS USE

quick connect driver | 350mA

	EUR	CODE
6W	25,50	
10W dim	35,50	
14W DALI*	64,50	

*revision opening required
more options and specs on page 896



PRIVATE RESIDENCE | STUDIO BINNEN THE NETHERLANDS









1.0

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-35°|355° M-31° L80|50K

wire springs 68-70 63 4-22

	EUR	CODE
	97,00	
	97,00	
	97,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	555	>90	3
3000K	585	>90	5
2000K-3000K | 16V	470	>90	9

ALWAYS USE

quick connect driver | 350mA

	EUR	CODE
6W	25,50	
10W dim	35,50	
14W DALI*	64,50	

*revision opening required
more options and specs on page 896





MORE VERSIONS + LOXONE ONLINE



PRIVATE RESIDENCE | CANDICE BRUNY FRANCE





MORE VERSIONS + LOXONE ONLINE



1.0 LED

LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 0°-35°|355° M-34° L80|55K

wire springs 102-104 90 4-25

	EUR	CODE
	133,00	
	133,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	635/860	>90	3
3000K	675/905	>90	5
2000-3000K	475/700	>90	9

LED module 20 years replaceability

ALWAYS USE

quick connect driver | 500mA

	EUR	CODE
10W	25,50	
10W dim	37,50	
15W DALI	64,50	

more options and specs on page 898



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-35°|355°

wire springs 102-104 110 4-25

	EUR	CODE
	79,00	
	79,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905



PRIVATE RESIDENCE | INTERIOR STUDIO VAN MAANEN THE NETHERLANDS







MORE VERSIONS ONLINE





OPTIONAL

honeycomb louver

	EUR	CODE
	14,50	

Ceiling recessed



1.0 SEMI RECESSED

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-90°|350° M-31° L70|55K

	EUR	CODE
	143,00	
	143,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	500	>90	3
3000K	530	>90	5

ALWAYS USE

quick connect driver | 350mA

	EUR	CODE
6W	25,50	
7W dim	33,50	
14W DALI	64,50	

revision opening required
more options and specs on page 896



1.0

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-90°|350° M-31° L70|55K

wire springs 45-47 75 4-26

	EUR	CODE
	135,00	
	135,00	
	135,00	
	135,00	
	135,00	
	135,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	500	>90	3
3000K	530	>90	5
2000-3000K | 16V	345	>90	9

ALWAYS USE

driver | 350mA

	EUR	CODE
6W	25,50	
7W dim	33,50	
14W DALI*	64,50	

*revision opening required
more options and specs on page 896



OFFICE BOES & VERRUE | ARCHITECT DEWITTE KORTRIJK | BELGIUM



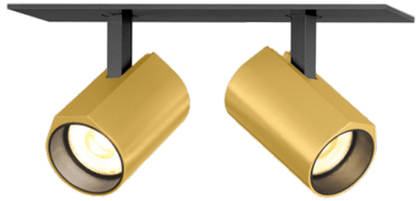













OPTIONAL

honeycomb louver

	EUR	CODE
	14,50	

LOXONE VERSIONS ONLINE

1.1

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-90°|350° M-31° L70|55K

blade springs 32x66 75 min. 4

	EUR	CODE
	135,00	
	135,00	
	135,00	
	135,00	

LIGHT COLOUR	LUMEN|CRI	CODE
2700K	500|>90	3
3000K	530|>90	5

ALWAYS USE

quick connect driver | 350mA

	EUR	CODE
6W	25,50	
7W dim	33,50	
14W DALI	64,50	

more options and specs on page 896

2.0

2x LED COB 6W | 700mA | 17V
aluminium

IP20 0°-90°|350° M-31° L70|55K

blade springs 32x145 60 min. 4

	EUR	CODE
	188,00	
	188,00	
	188,00	
	188,00	

LIGHT COLOUR	LUMEN|CRI	CODE
2700K	2x500|>90	3
3000K	2x530|>90	5

ALWAYS USE

driver | 700mA | only 1x needed

	EUR	CODE
14W dim	39,00	
28W DALI	67,00	

more options and specs on page 900

3.0

3x LED COB 6W | 700mA | 26V
aluminium

IP20 0°-90°|350° M-31° L70|55K

blade springs 32x221 60 min. 4

	EUR	CODE
	238,00	
	238,00	
	238,00	
	238,00	

LIGHT COLOUR	LUMEN|CRI	CODE
2700K	3x500|>90	3
3000K	3x530|>90	5

ALWAYS USE

driver | 700mA | only 1x needed

	EUR	CODE
20W dim	45,50	
28W DALI	67,00	

more options and specs on page 900



reddot winner 2024









1.0

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-90°|350° M-31° L80|50K

wire springs 40-41 75 4-26

2700K | CRI >90 | 585lm

	EUR	CODE
	142,00	
	142,00	
	142,00	





OPTIONAL

honeycomb louver

	EUR	CODE
	14,50	

ALWAYS USE

quick connect driver | 350mA

	EUR	CODE
7W dim	33,50	
14W DALI*	64,50	

*revision opening required

more options and specs on page 896

LOXONE VERSIONS ONLINE

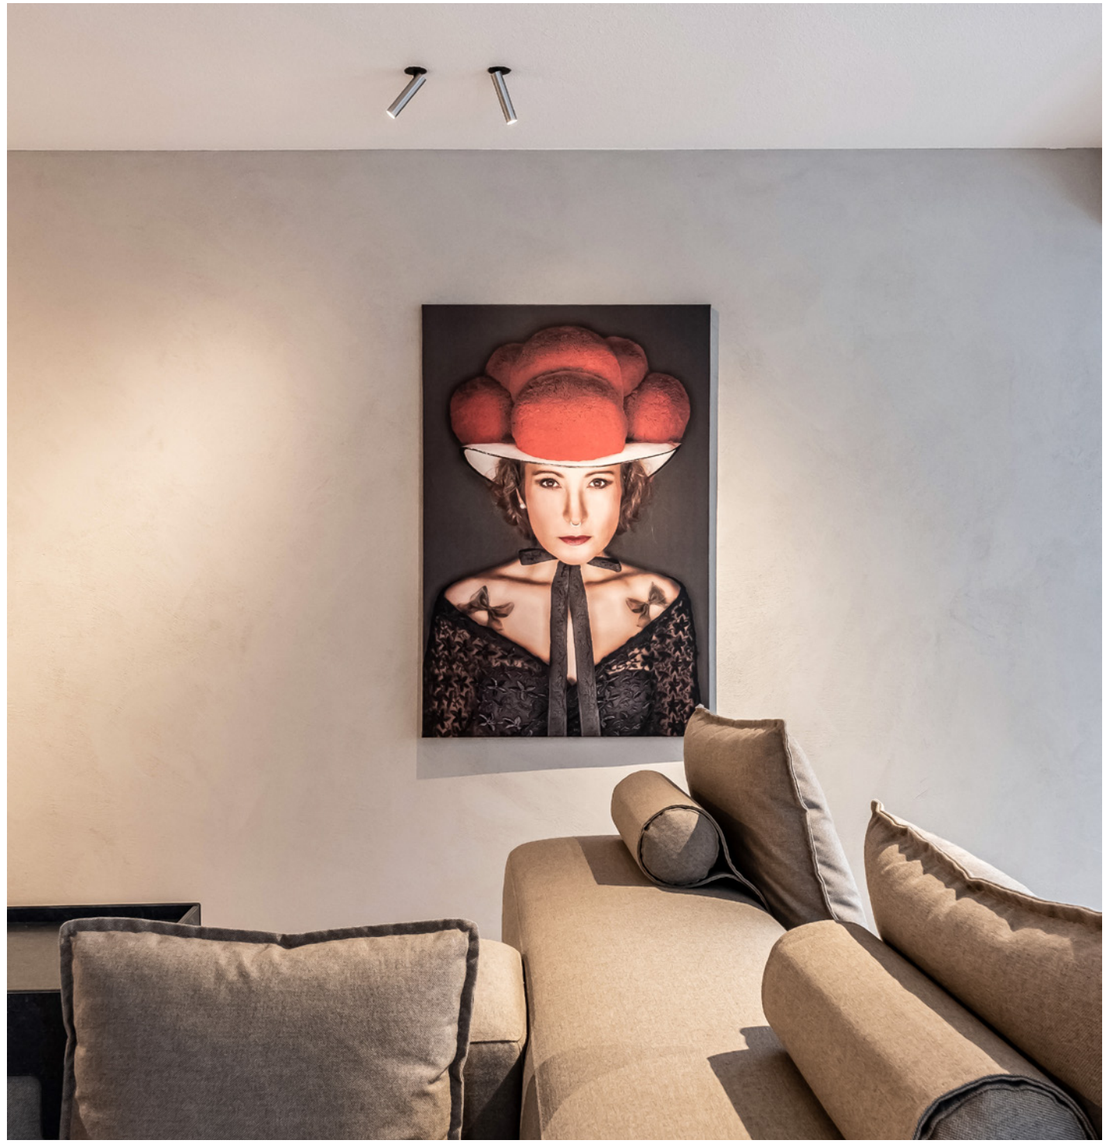

WALDBLICK WELLNESS | EW STUDIO FREUDENSTADT | GERMANY

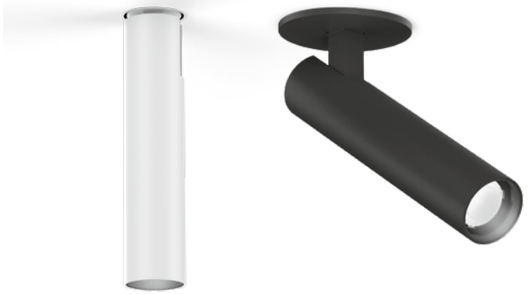





1.0 TRIMLESS

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-90°|360° M-30° L80|50K

45-47 67 4-26

	EUR	CODE
	165,20	
	173,20	
	173,20	
	165,20	

LIGHT COLOUR	LUMEN|CRI	CODE
2700K	525|>90	3
3000K	555|>90	5

ALWAYS USE

quick connect driver | 350mA

	EUR	CODE
6W	25,50	
7W dim	33,50	
14W DALI	64,50	

revision opening required
more options and specs on page 896

1.0

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-90°|350° M-30° L80|50K

wire springs 45-47 75 4-26

	EUR	CODE
	134,00	
	142,00	
	142,00	
	134,00	

LIGHT COLOUR	LUMEN|CRI	CODE
2700K	525|>90	3
3000K	555|>90	5

ALWAYS USE

quick connect driver | 350mA

	EUR	CODE
6W	25,50	
7W dim	33,50	
14W DALI*	64,50	

*revision opening required
more options and specs on page 896





MORE VERSIONS + LOXONE ONLINE

193
329 | 347
415 | 509
571
589 | 685
723 | 729

back









reddot winner 2023

Ceiling recessed

193
329 | 347
415 | 509
571
589 | 685
723 | 729



2.0

2x LED COB 6W | 700mA | 17V
aluminium

IP20 0°-90°|350° M-30° L80|50K

wire springs 105x30 60 4-26

	EUR	CODE
	208,00	
	220,00	
	208,00	

LIGHT COLOUR	LUMEN|CRI	CODE
2700K	2x515|>90	3
3000K	2x545|>90	5





ALWAYS USE

quick connect driver | 700mA
only 1x needed

	EUR	CODE
14W dim	39,00	
28W DALI	67,00	

more options and specs on page 900

MORE VERSIONS + LOXONE ONLINE



PRIVATE RESIDENCE | BUREAU DESTADSBADER BELGIUM

reddot winner 2023













LOXONE VERSIONS ONLINE

Ceiling recessed

1.0 TRIMLESS

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-55°|350° M-30° L80|50K

	EUR	CODE
	159,00	
	167,00	
	167,00	
	167,00	
	167,00	
	159,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	535	>90	3
3000K	565	>90	5

1.0

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-55°|350° M-30° L80|50K

wire springs 64-68 53 4-26

	EUR	CODE
	149,00	
	157,00	
	157,00	
	157,00	
	157,00	
	149,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	525	>90	3
3000K	555	>90	5

ALWAYS USE

alu plasterkit 78-80 45 12.5,15,20,25

	EUR	CODE
	22,00	

quick connect driver | 350mA

	EUR	CODE
6W	25,50	
7W dim	33,50	
14W DALI	64,50	

more options and specs on page 896

ALWAYS USE

quick connect driver | 350mA

	EUR	CODE
6W	25,50	
7W dim	33,50	
14W DALI*	64,50	

*revision opening required and
more options and specs on page 896



DESIGN AWARD 2023 · GOOD DESIGN · reddot winner 2023





Ceiling recessed





1.0 TRIMLESS

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-90°|360° M-30° L80|50K

45-47 67 4-26

	EUR	CODE
	221,00	
	233,20	
	221,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	525	>90	3
3000K	555	>90	5

ALWAYS USE

quick connect driver | 350mA

	EUR	CODE
6W	25,50	
7W dim	33,50	
14W DALI	64,50	

revision opening required
more options and specs on page 896

1.0

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-90°|360° M-30° L80|50K

40-41 67 4-26

	EUR	CODE
	190,00	
	198,00	
	190,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	525	>90	3
3000K	555	>90	5

ALWAYS USE

quick connect driver | 350mA

	EUR	CODE
6W	25,50	
7W dim	33,50	
14W DALI	64,50	

revision opening required
more options and specs on page 896

67 mm
low recessed

IC rated

LOXONE VERSIONS ONLINE

193
329 | 347
415 | 509
571
589 | 685
723 | 729

back

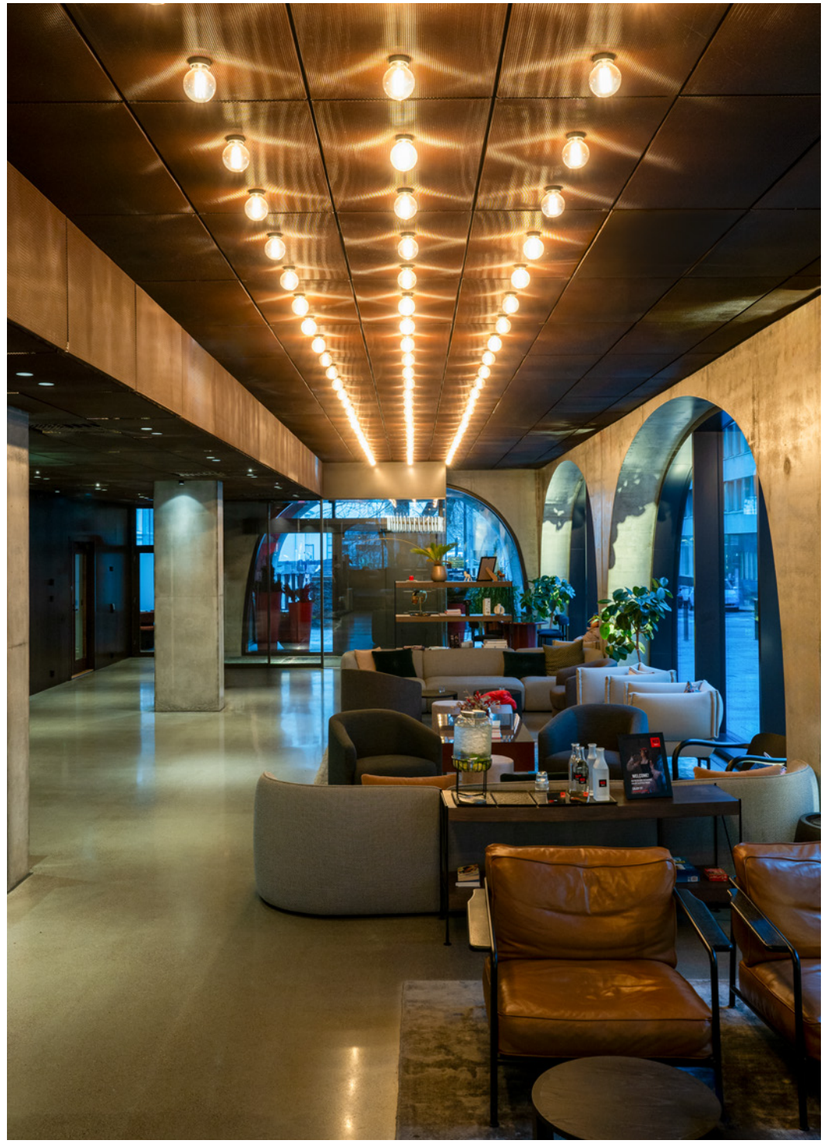

RADISSON RED | DESIGN AGENCY FYRA HELSINKI | FINLAND



Ceiling recessed



1.0

G95 max. 12W | E27
220-240VAC | 50-60Hz
aluminium

IP20

54-56 90 7-33

	EUR	CODE
	88,00	

OPTIONAL

G95 5W/5.1W | E27 | phase-cut dim
gold mirror

	EUR	CODE
2200K | 370lm	35,00	
2700K | 410lm	35,00	

G95 5W | E27 | phase-cut dim
silver mirror

	EUR	CODE
2700K | 395lm	35,00	

G95 10W | E27 | phase-cut dim
ceramic soft look

	EUR	CODE
2700K | 1060lm	33,00	

G95 5.4W | E27 | phase-cut dim
gold tinted

	EUR	CODE
2200K | 380lm	33,00	

383

back



PRIVATE RESIDENCE | STUDIO BENOIT BELGIUM











1.0 LED

LED COB 6/9W | 350/500mA | 17V
aluminium

IP44 M-34° L80|55K

wire springs 76x78 90 4-30

	EUR	CODE
	114,00	
	114,00	
	114,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	585/785	>90	3
3000K	615/830	>90	5
2000-3000K	430/635	>90	9

LED module 20 years replaceability

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP44

wire springs 74x78 130 4-30

	EUR	CODE
	60,00	
	60,00	
	60,00	

ALWAYS USE

quick connect driver | 500mA

	EUR	CODE
10W | IP20	25,50	
10W dim | IP20	37,50	
15W DALI | IP20	64,50	

more options and specs on page 898

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905

MORE VERSIONS + LOXONE ONLINE

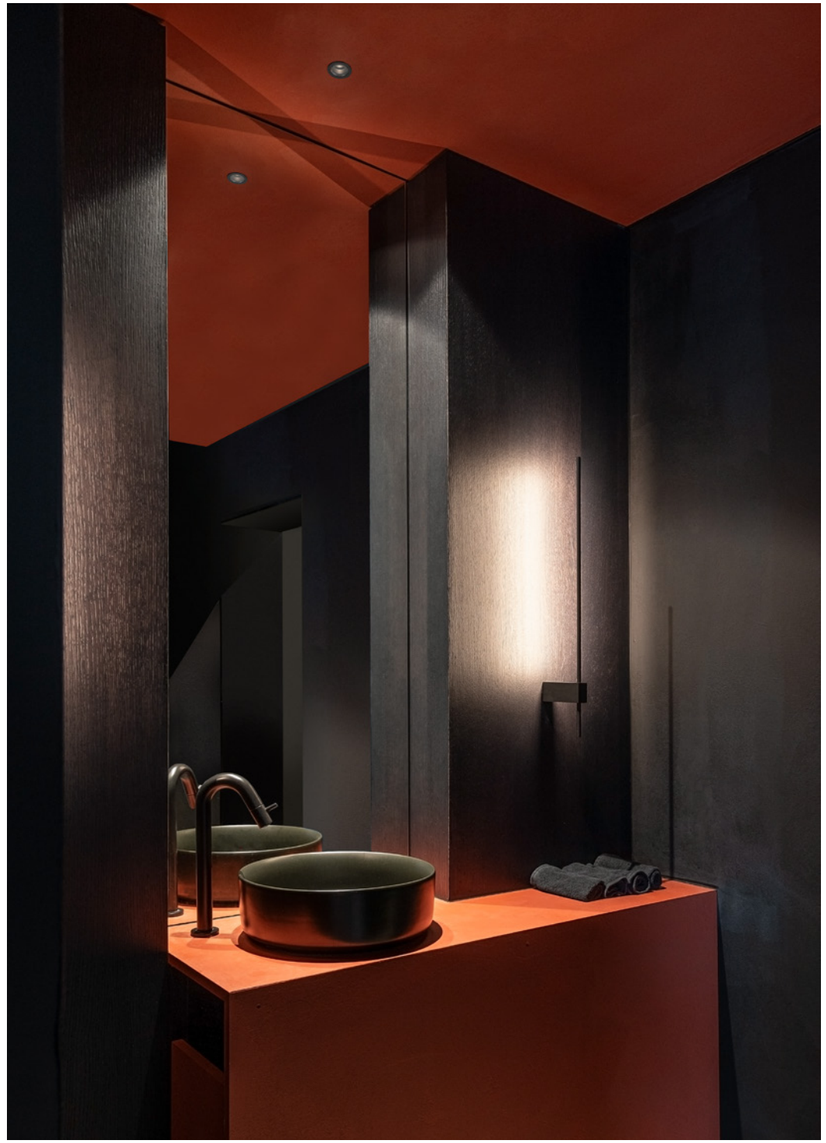

RESTAURANT OSAR | STEENHUYSE INTERIEURARCHITECTEN TIELT | BELGIUM

reddot winner 2023





LOXONE VERSIONS ONLINE

193
329 | 347
415 | 509
571
589 | 685
723 | 729



42

ø45

1.0

LED COB 5W | 250mA | 17V
aluminium

IP44 M-32° L80|50K

wire springs 40-41 68 4-25

	EUR	CODE
	65,00	
	65,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	295	>90	3
3000K	325	>90	5

ALWAYS USE

quick connect driver | 250mA

	EUR	CODE
5W dim | IP20	33,00	
10W DALI | IP20*	64,50	

*revision opening required
more options and specs on page 895

back



PRIVATE RESIDENCE | VLADIMIR MITROVIĆ SERBIA







1.0

LED COB 5W | 250mA | 17V
aluminium

IP44 M-32° L80|50K

wire springs 40-41 L68 4-25

	EUR	CODE
	62,00	
	62,00	
	62,00	

LIGHT COLOUR	LUMEN|CRI	CODE
2700K	355|>90	3
3000K	400|>90	5

ALWAYS USE

quick connect driver | 250mA

	EUR	CODE
5W dim | IP20	33,00	
10W DALI | IP20*	64,50	

*revision opening required
more options and specs on page 895

LOXONE VERSIONS ONLINE

IC rated

back







1.0

LED COB 4W | 500mA | 8V
aluminium

IP65 M-30° L80|55K

wire springs 50-52 85 4-25

	EUR	CODE
	69,50	
	69,50	
	69,50	

LIGHT COLOUR	LUMEN|CRI	CODE
2700K	470|>90	3
3000K	495|>90	5

ALWAYS USE

driver | 500mA

	EUR	CODE
6W | IP20	33,00	
6.5W dim | IP20*	25,50	
7W | IP67	46,50	

*revision opening required
more drivers on page 898

741

MORE VERSIONS ONLINE



HOTEL MARTIN'S RENTMEESTERIJ | PCP ARCHITECTS BILZEN | BELGIUM

back











1.0

LED COB 6W | 350mA | 17V
aluminium

IP65 M-31° L80|50K

wire springs 68-70 60 4-25

	EUR	CODE
	96,00	
	96,00	
	96,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	590	>90	3
3000K	615	>90	5





ALWAYS USE

driver | 350mA

	EUR	CODE
6W | IP20	25,50	
10W dim | IP20*	35,50	
17W | IP68*	69,00	

*revision opening required
more options and specs on page 896

back









1.0 LED

LED COB 6/9W | 350/500mA | 17V
aluminium

IP65 M-33° L80|55K

wire springs 86-89 85 4-27

	EUR	CODE
	109,00	
	109,00	
	109,00	

LIGHT COLOUR	LUMEN|CRI	CODE
2700K	480/660|>90	3
3000K	510/695|>90	5

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP44

wire springs 86-89 125 4-25

	EUR	CODE
	59,00	
	59,00	
	59,00	

ALWAYS USE

driver | 500mA

	EUR	CODE
10W | IP20	25,50	
10W dim | IP20	37,50	
24W | IP68	74,00	

more options and specs on page 898

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905

MORE VERSIONS + LOXONE ONLINE

1.0 LED
IC rated









LOXONE VERSIONS ONLINE

Ceiling recessed





1.0 LED

LED COB 6/9W | 350/500mA | 17V
aluminium

IP44 M-34° L80|55K

wire springs 76-79 95 4-38

	EUR	CODE
	119,00	
	119,00	
	119,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	590/790	>90	3
3000K	620/835	>90	5
2000-3000K	440/650	>90	9

LED module 20 years replaceability

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP44

wire springs 76-79 130 4-38

	EUR	CODE
	65,00	
	65,00	
	65,00	

ALWAYS USE

quick connect driver | 500mA

	EUR	CODE
10W | IP20	25,50	
10W dim | IP20	37,50	
15W DALI | IP20	64,50	

more options and specs on page 898

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905



PRIVATE RESIDENCE | JOLIJN GEERAERTS INTERIEURARCHITECT BELGIUM







IC rated

back

Ceiling recessed



1.0

LED COB 6/9W | 350/500mA | 17V
aluminium | opal glass convex lens

IP65 W-105° L80|55K

wire springs 70 80 4-27

	EUR	CODE
	95,00	
	95,00	
	95,00	
	95,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	375/515	>90	3
3000K	390/535	>90	5

ALWAYS USE

driver | 500mA

	EUR	CODE
10W | IP20	25,50	
10W dim | IP20	37,50	
24W | IP68	74,00	

more options and specs on page 898

299
747
757
803









1.0 LED

LED COB 6/9W | 350/500mA | 17V
aluminium

IP44 M-34° L80|55K

wire springs 76-79 52 4-25

	EUR	CODE
	99,50	
	99,50	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	605/815	>90	3
3000K	640/860	>90	5
2000-3000K	450/665	>90	9

LED module 20 years replaceability



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP44

wire springs 76-79 85 4-25

	EUR	CODE
	45,50	
	45,50	

ALWAYS USE

quick connect driver | 500mA

	EUR	CODE
10W | IP20	25,50	
10W dim | IP20	37,50	
15W DALI | IP20	64,50	

more options and specs on page 898

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905

LOXONE VERSIONS ONLINE



PRIVATE RESIDENCE | AJ ARCHITECTEN BELGIUM

back



Ceiling recessed

271 | 275 | 295

701



1.0

LED COB 6/9W | 350/500mA | 18V
aluminium | opal glass

IP44 L80|50K

wire springs 46-51 68 4-25

	EUR	CODE
	148,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	520/705	>95	3
3000K	550/740	>95	5

ALWAYS USE

quick connect driver | 350mA

	EUR	CODE
6W | IP20	25,50	
7W dim | IP20	33,50	
14W DALI*	64,50	

*revision opening required
more options and specs on page 896



2.0

LED COB 6/9W | 350/500mA | 18V
aluminium | opal glass

IP44 L80|50K

wire springs 46-51 68 4-25

	EUR	CODE
	158,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	600/810	>95	3
3000K	630/850	>95	5

ALWAYS USE

quick connect driver | 350mA

	EUR	CODE
6W | IP20	25,50	
7W dim | IP20	33,50	
14W DALI*	64,50	

*revision opening required
more options and specs on page 896



3.0

LED COB 6/9W | 350/500mA | 18V
aluminium | opal glass

IP44 L80|50K

wire springs 46-51 68 4-25

	EUR	CODE
	178,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	645/875	>95	3
3000K	665/915	>95	5

ALWAYS USE

quick connect driver | 350mA

	EUR	CODE
6W | IP20	25,50	
7W dim | IP20	33,50	
14W DALI*	64,50	

*revision opening required
more options and specs on page 896



LOXONE VERSIONS ONLINE







297

707









1.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz
clear + opal PMMA cover

IP44 L80|60K

blade springs 76-79 50 min. 8

3000K | CRI >90 | 640lm

	EUR	CODE
	155,00	

2.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz
clear + opal PMMA cover

IP44 L80|60K

blade springs 72x72 50 min. 8

3000K | CRI >90 | 640lm

	EUR	CODE
	155,00	

back



DENTAL PRACTICE TANDKORAAL | G4A ARCHITECTEN BRUGGE | BELGIUM





ø210



ø305

1.6

LED PCB 13W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA cover

IP44 L80|60K

wire springs 202-205 50 4-22

3000K | CRI >90 | 1170lm

	EUR	CODE
	166,00	
	166,00	

2.6

LED PCB 19W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA cover

IP44 L80|60K

wire springs 297-300 50 4-22

3000K | CRI >90 | 1740lm

	EUR	CODE
	259,00	
	259,00	



back

Ceiling surface

SPOT LIGHTS


177


179


181


189


193


197


199

201


203


205

DOWN LIGHTS


211


213

215


221


223


227


229


231


233


235


239


241


243


245


247


249


251


253


255


257


261

LUMINAIRES

263


267


269


271


273


275


277


279


283

285

287

289

291

293

IP-RATED

295

297

297

299

301

303

305

307

back











2.0

LED COB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-35°|350° M-31° L80|50K

	EUR	CODE
	238,00	
	274,00	
	274,00	
	238,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x420	>90	3
3000K	2x440	>90	5



OPTIONAL

honeycomb louver

	EUR	CODE
	14,50	

back



reddot winner 2023

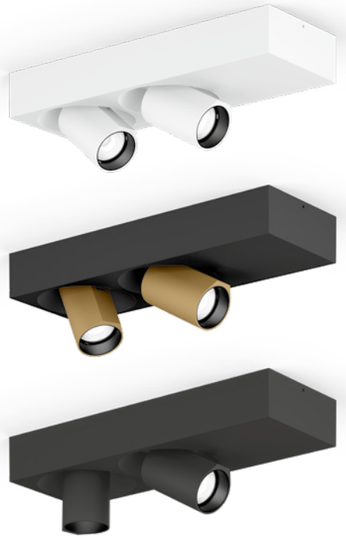



2.0

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-60°|355° M-31° L70|55K

	EUR	CODE
	278,00	
	278,00	
	278,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x490	>90	3
3000K	2x510	>90	5
2000-3000K	2x340	>90	9



OPTIONAL

honeycomb louver

	EUR	CODE
	14,50	

back



PRIVATE RESIDENCE | VERFAILLIE INTERIEUR BELGIUM

Ceiling surface

131

321

585







1.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-90°|350° M-31° L70|55K

	EUR	CODE
	168,00	
	168,00	
	168,00	
	168,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	520	>90	3
3000K	540	>90	5

2.0

LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-90°|350° M-31° L70|55K

	EUR	CODE
	269,00	
	269,00	
	269,00	
	269,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x480	>90	3
3000K	2x525	>90	5



OPTIONAL

honeycomb louver

	EUR	CODE
	14,50	

LOXONE VERSIONS ONLINE

back


MARRAKECH FLAIR



Ceiling surface

131
321
585









4.0

LED COB 30W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-90°|350° M-31° L70|55K

	EUR	CODE
	438,00	
	438,00	
	438,00	
	438,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	4x510	>90	3
3000K	4x530	>90	5

4.1

LED COB 30W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-90°|350° M-31° L70|55K

	EUR	CODE
	415,00	
	415,00	
	415,00	
	415,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	4x510	>90	3
3000K	4x530	>90	5



OPTIONAL

honeycomb louver

	EUR	CODE
	14,50	

back



PRIVATE RESIDENCE | STEENOVEN | B2A | BELGIUM

Ceiling surface



131



321



585



6.0

LED COB 41W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-90°|350° M-31° L70|55K

	EUR	CODE
	575,00	
	575,00	
	575,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	6x480	>90	3
3000K	6x525	>90	5



OPTIONAL

honeycomb louver

	EUR	CODE
	14,50	

back

reddot winner 2024

Ceiling surface

135

325

569









honeycomb

OPTIONAL

honeycomb louver

	EUR	CODE
	14,50	

1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-90°|350° M-31° L80|50K

2700K | CRI >90 | 585lm

	EUR	CODE
	179,00	
	179,00	
	179,00	

2.0

LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-90°|350° M-31° L80|50K

2700K | CRI >90 | 2x585lm

	EUR	CODE
	289,00	
	289,00	
	289,00	

4.0

LED COB 28W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-90°|350° M-31° L80|50K

2700K | CRI >90 | 4x585lm

	EUR	CODE
	465,00	
	465,00	

back





PRIVATE RESIDENCE | AJ ARCHITECTEN BELGIUM



LOXONE VERSIONS ONLINE





1.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-90°|350° M-30°L80|50K

	EUR	CODE
	175,00	
	179,00	
	175,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	550	>90	3
3000K	580	>90	5

2.0

LED COB 18W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-90°|350° M-30° L80|50K

	EUR	CODE
	285,00	
	295,00	
	285,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x545	>90	3
3000K	2x550	>90	5

back







reddot winner 2023



Ceiling surface 61 | 137 | 153

329 | 347

415 | 509

571

589 | 685

723 | 729



4.0

LED COB 29W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-90°|350° M-30° L80|50K

	EUR	CODE
	455,00	
	455,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	4x490	>90	3
3000K	4x495	>90	5

back

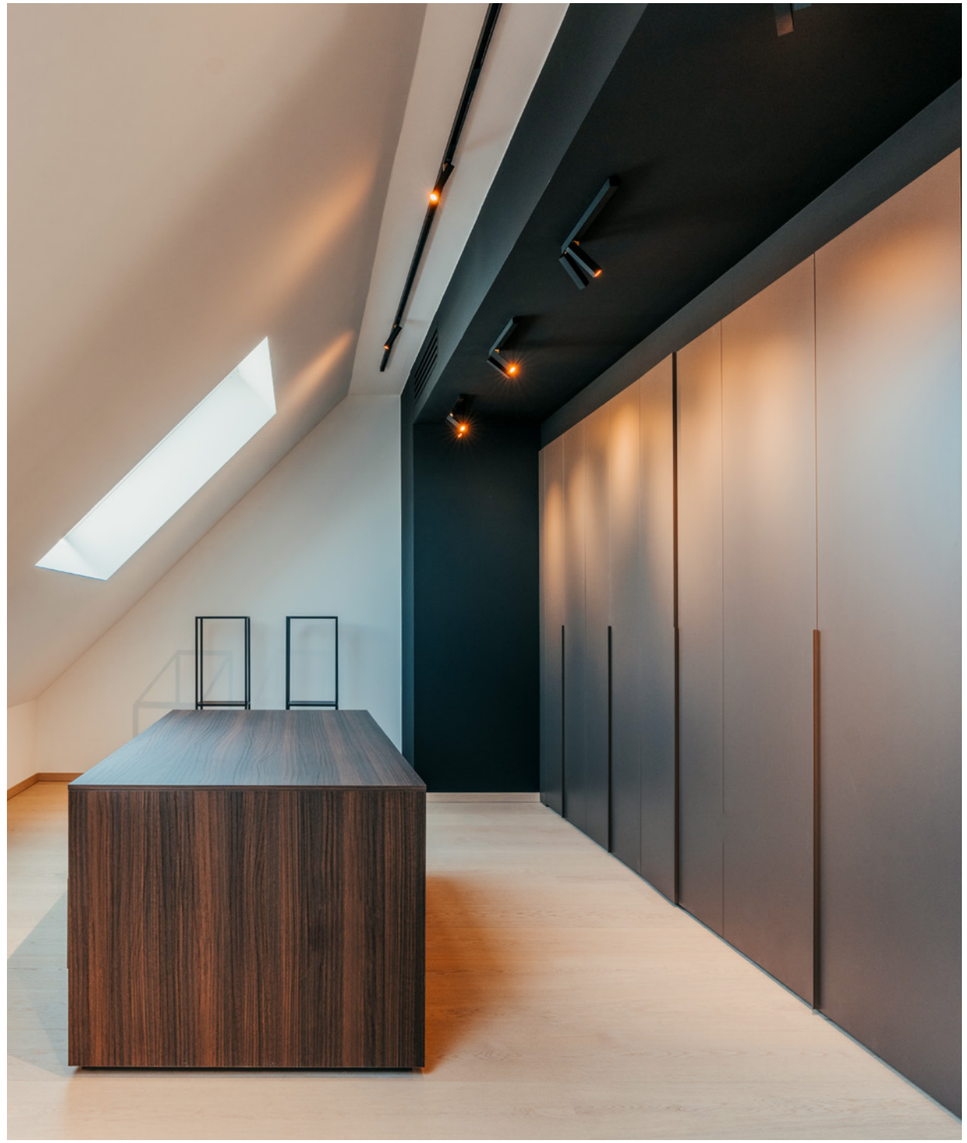

PRIVATE RESIDENCE | AXIOME ARCHITECTURE BELGIUM

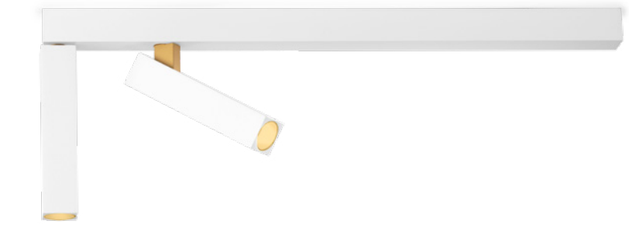

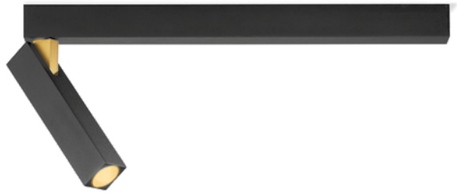

Ceiling surface

333

687 | 691





1.0

LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-90°|350° M-23° L80|50K

	EUR	CODE
	265,00	
	265,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	410	>90	3
3000K	435	>90	5

2.0

LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-90°|350° M-23° L80|50K

	EUR	CODE
	345,00	
	345,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x215	>90	3
3000K	2x225	>90	5







363





1.0

PAR11 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-90°|350°

	EUR	CODE
	65,00	
	65,00	

OPTIONAL

PAR11 4.3W | GU10 | phase-cut dim

	EUR	CODE
2700K	225lm	14,50	
3000K	235lm	14,50	

2.0

2x PAR11 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-90°|350°

	EUR	CODE
	118,00	
	118,00	

OPTIONAL

PAR11 4.3W | GU10 | phase-cut dim

	EUR	CODE
2700K	225lm	14,50	
3000K	235lm	14,50	



MARBELLA DESIGN & ART FAIR | MARISA GALLO | INTERIORISMO STUDIO MARBELLA | SPAIN









1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-90°

	EUR	CODE
	79,00	
	85,00	
	85,00	
	79,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905

1.1

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-90°|330°

	EUR	CODE
	122,00	
	122,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905

3.0

3x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-90°|330°

	EUR	CODE
	245,00	
	245,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905

365

689

back













1.0 LED

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP20 0°-90° M-39° L70|55K

	EUR	CODE
	165,00	
	165,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	400	>90	3
3000K	445	>90	5
1800-3000K	350	>80	9

1.1 LED

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP20 0°-90° M-32° L70|55K

	EUR	CODE
	189,00	
	189,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	925	>90	3
3000K	960	>90	5
1800-3000K	645	>80	9

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-90°

	EUR	CODE
	96,00	
	96,00	





OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905















2.0

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-90°|355°

	EUR	CODE
	195,00	
	195,00	

3.0

3x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-90°|355°

	EUR	CODE
	235,00	
	235,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905











4.0

LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | polycarbonate
light colour selectable via dip switch

IP20 M-39° L80|50K

2700K/3000K | CRI >90 | 4x125lm

	EUR	CODE
	148,00	
	148,00	
	148,00	
	148,00	

4.1

LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | polycarbonate
light colour selectable via dip switch

IP20 M-39° L80|50K

2700K/3000K | CRI >90 | 4x125lm

	EUR	CODE
	140,00	
	140,00	
	140,00	
	140,00	

8.0

LED PCB 19W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | polycarbonate
light colour selectable via dip switch

IP20 M-39° L80|50K

2700K/3000K | CRI >90 | 8x125lm

	EUR	CODE
	235,00	
	235,00	
	235,00	
	235,00	

UGR ≤ 16
65°≤ 3000cd

2700K – 3000K
adjustment
switch

back



PRIVATE RESIDENCE | IN-LIJN INTERIEURARCHITECTUUR BELGIUM

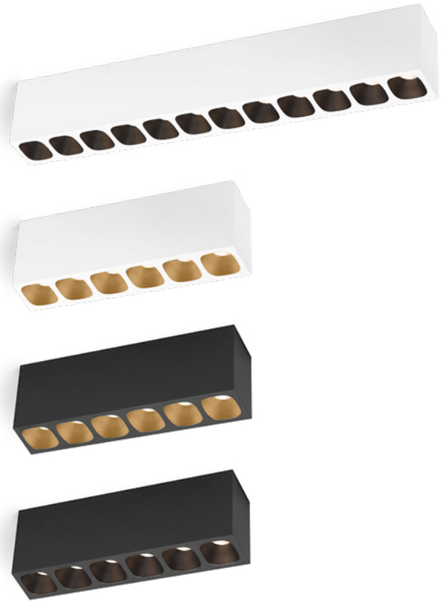





6.0

LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-28° L80|50K

	EUR	CODE
	255,00	
	255,00	
	255,00	
	255,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	6x160	>90	3
3000K	6x165	>90	5

12.0

LED COB 27W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-28° L80|50K

	EUR	CODE
	375,00	
	375,00	
	375,00	
	375,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	12x160	>90	3
3000K	12x165	>90	5



Ceiling surface







1.0

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-32° L70|55K

	EUR	CODE
	148,00	
	148,00	
	148,00	
	148,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	355	>90	3
3000K	385	>90	5

4.1

LED COB 20W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-32° L70|55K

	EUR	CODE
	238,00	
	238,00	
	238,00	
	238,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	4x365	>90	3
3000K	4x380	>90	5



OPTIONAL

honeycomb louver

	EUR	CODE
	14,50	

back





Ceiling surface

75

371

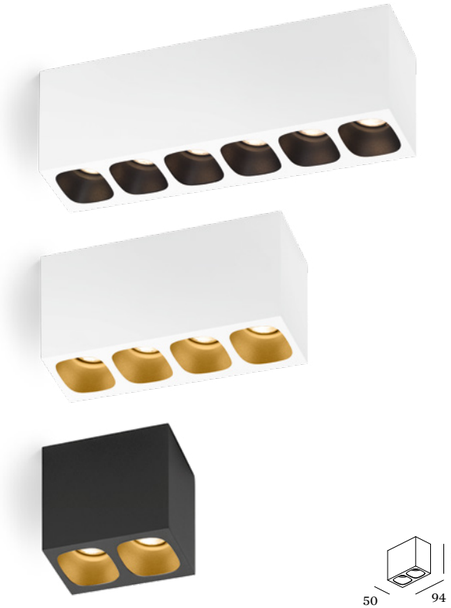





2.0

LED COB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-32° L70|55K

	EUR	CODE
	182,00	
	182,00	
	182,00	
	182,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x355	>90	3
3000K	2x385	>90	5

4.0

LED COB 20W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-32° L70|55K

	EUR	CODE
	242,00	
	242,00	
	242,00	
	242,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	4x365	>90	3
3000K	4x380	>90	5

6.0

LED COB 21W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-32° L70|55K

	EUR	CODE
	345,00	
	345,00	
	345,00	
	345,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	6x330	>90	3
3000K	6x350	>90	5



OPTIONAL

honeycomb louver

	EUR	CODE
	14,50	



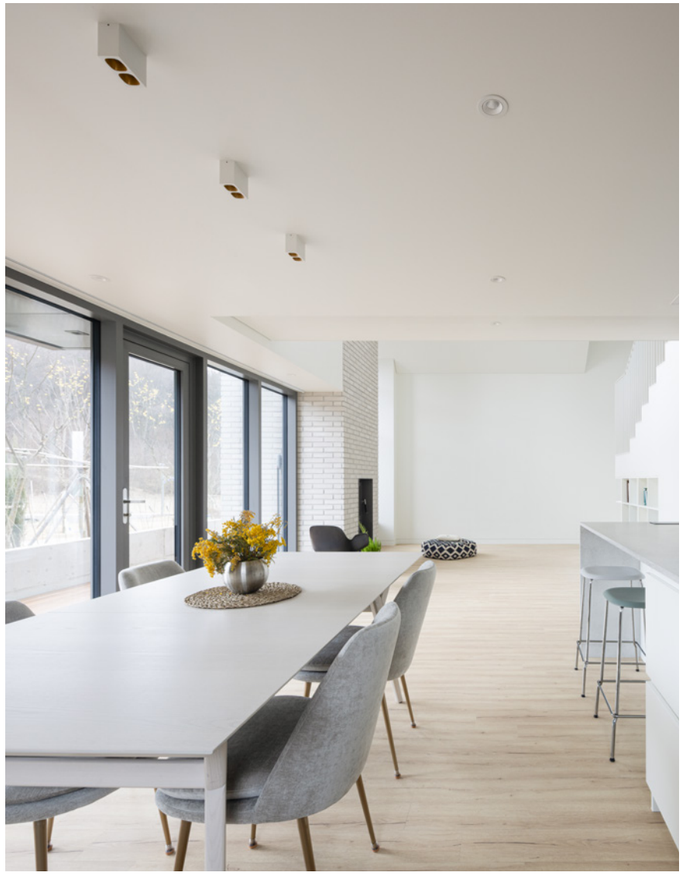

PRIVATE RESIDENCE | ORANEN & TURKLIN FINLAND

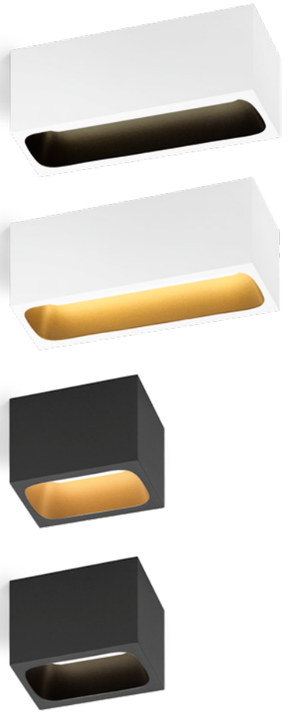

Ceiling surface

371





2.0

LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA cover

IP20 L80|60K

	EUR	CODE
	182,00	
	182,00	
	182,00	
	182,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	270	>90	3
3000K	280	>90	5

4.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA cover

IP20 L80|60K

	EUR	CODE
	242,00	
	242,00	
	242,00	
	242,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	685	>90	3
3000K	710	>90	5



back



PRIVATE RESIDENCE | PADRON LUXURY LIVING BY POTRELL BELGIUM

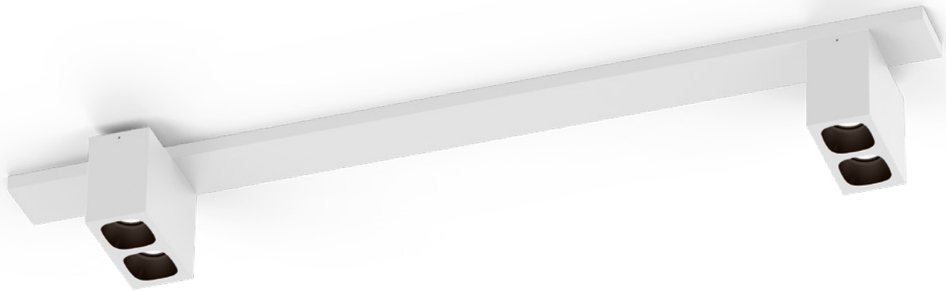











OPTIONAL

honeycomb louver

	EUR	CODE
	14,50	

2.2

LED COB 22W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PC lens and reflector

IP20 M-32° L70|55K

	EUR	CODE
	497,00	173564WWB_
	497,00	173564WWG_
	497,00	173564BBG_
	497,00	173564BBB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	4x360	>90	3
3000K	4x380	>90	5

4.2

LED COB 31W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PC lens and reflector

IP20 M-32° L70|55K

	EUR	CODE
	557,00	173664WWB_
	557,00	173664WWG_
	557,00	173664BBG_
	557,00	173664BBB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	6x360	>90	3
3000K	6x380	>90	5

4.4

LED COB 40W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PC lens and reflector

IP20 M-32° L70|55K

	EUR	CODE
	617,00	173764WWB_
	617,00	173764WWG_
	617,00	173764BBG_
	617,00	173764BBB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	8x360	>90	3
3000K	8x380	>90	5





2.4.2

LED COB 42W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PC lens and reflector

IP20 M-32° L70|55K

	EUR	CODE
	772,00	173864WWB_
	772,00	173864WWG_
	772,00	173864BBG_
	772,00	173864BBB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	8x360	>90	3
3000K	8x380	>90	5



4.2.2

LED COB 42W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PC lens and reflector

IP20 M-32° L70|55K

	EUR	CODE
	772,00	173964WWB_
	772,00	173964WWG_
	772,00	173964BBG_
	772,00	173964BBB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	8x360	>90	3
3000K	8x380	>90	5





OPTIONAL

honeycomb louver

	EUR	CODE
	14,50	













1.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-25°|355° M-31° L70|55K

	EUR	CODE
	168,00	
	168,00	
	168,00	
	168,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	550	>90	3
3000K	580	>90	5

LED module 20 years replaceability

2.0

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-25°|355° M-31° L70|55K

	EUR	CODE
	255,00	
	255,00	
	255,00	
	255,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x550	>90	3
3000K	2x580	>90	5

LED module 20 years replaceability

3.0

LED COB 23W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-25°|355° M-31° L70|55K

	EUR	CODE
	325,00	
	325,00	
	325,00	
	325,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	3x540	>90	3
3000K	3x570	>90	5

LED module 20 years replaceability

MORE VERSIONS + LOXONE ONLINE



DEUTSCHE WOHNWERTE | BRANDHERM + KRUMREY HAMBURG HEIDELBERG | GERMANY

Ceiling surface











1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-35°|355°

	EUR	CODE
	175,00	
	175,00	
	175,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905

2.0

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-35°|355°

	EUR	CODE
	258,00	
	258,00	
	258,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905

3.0

3x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-35°|355°

	EUR	CODE
	338,00	
	338,00	
	338,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905

LOXONE VERSIONS ONLINE

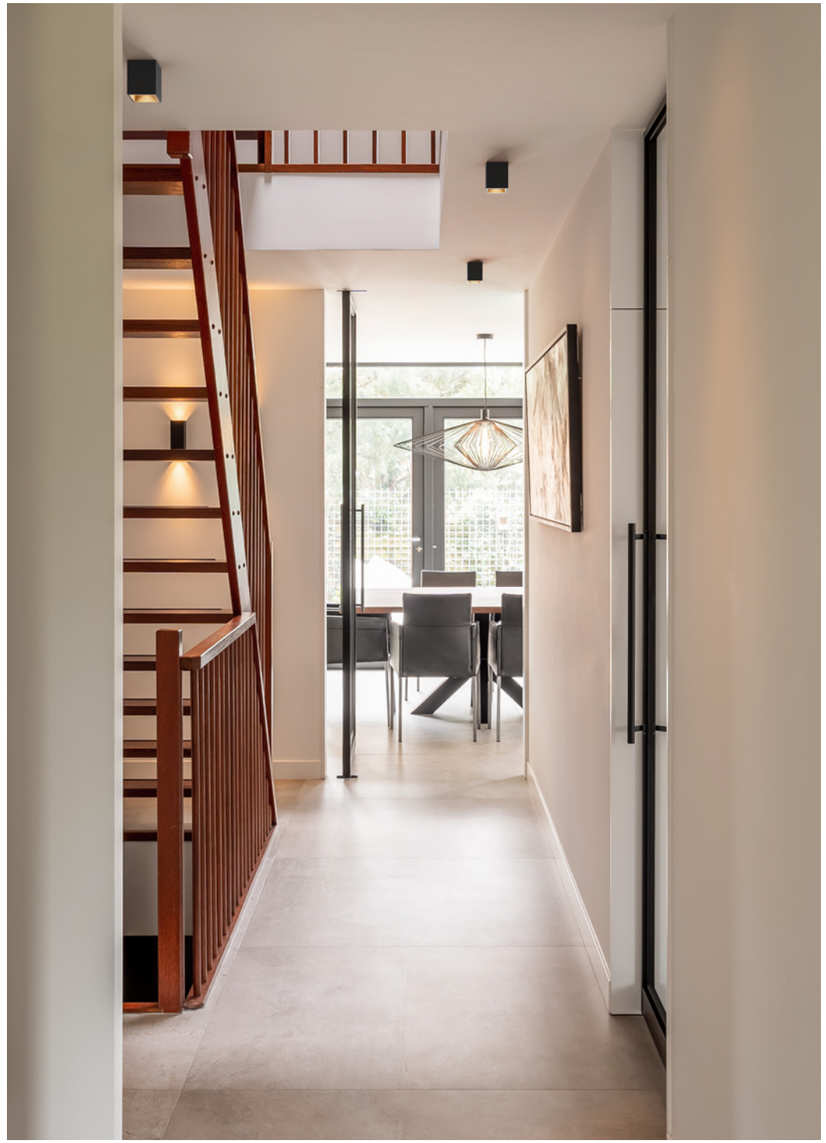

PRIVATE RESIDENCE | JACO GOUDRIAAN THE NETHERLANDS








WW

WM

MM

WB

MB

QQ

BM

BB

LOXONE VERSIONS ONLINE

back

Ceiling surface

605



1.0 LED

LED COB 7W | phase-cut dim
220-240VAC | 50-60Hz
incl. driver | aluminium

IP20 M-30° L80|55K

	EUR	CODE
	98,00	
	98,00	
	98,00	
	99,00	
	99,00	
	98,00	
	99,00	
	98,00	

LIGHT COLOUR	LUMEN|CRI	CODE
2700K	470|>90	3
3000K	500|>90	5













Ceiling surface



605

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

	EUR	CODE
	57,00	
	58,00	
	58,00	
	58,00	
	57,00	



OPTIONAL

inner reflector max. 10W
polycarbonate

	EUR	CODE
	9,50	
	9,50	
	9,50	
	9,50	
	9,50	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905

back



OFFICE INNARGI COPENHAGEN | HELLE FLOU COPENHAGEN | DENMARK













1.0 LED

LED COB 8W | dimmable
220-240VAC | 50-60Hz
aluminium

IP20 M-21° L70|50K

phase-cut dim

	EUR	CODE
	175,00	
	176,00	
	176,00	
	176,00	
	176,00	
	175,00	

DALI

	EUR	CODE
	198,00	
	199,00	
	199,00	
	199,00	
	199,00	
	198,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	600	>90	3
3000K	620	>90	5
2000-3000K*	415	>90	9

*only for phase-cut dim

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

	EUR	CODE
	68,00	
	69,00	
	69,00	
	69,00	
	69,00	
	68,00	





OPTIONAL

inner reflector max. 10W
polycarbonate

	EUR	CODE
	21,00	
	21,00	
	21,00	
	21,00	

inner cover max. 10W
aluminium

	EUR	CODE
	23,00	
	23,00	
	23,00	
	23,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905



PRIVATE RESIDENCE | DECOFORM BELGIUM













OPTIONAL

double inner reflector max. 10W
polycarbonate

	EUR	CODE
	27,00	
	27,00	
	27,00	
	27,00	

inner cover max. 10W
aluminium | 2 pieces needed

	EUR	CODE
	23,00	
	23,00	
	23,00	
	23,00	

2.0 LED

LED COB 16W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP20 M-21° L70|50K

	EUR	CODE
	278,00	
	281,00	
	281,00	
	281,00	
	281,00	
	278,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x600	>90	3
3000K	2x620	>90	5
2000-3000K	2x415	>90	9

2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

	EUR	CODE
	135,00	
	138,00	
	138,00	
	138,00	
	138,00	
	135,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905



OFFICE INARTO | INARTO ARCHITECTEN HERENTALS | BELGIUM

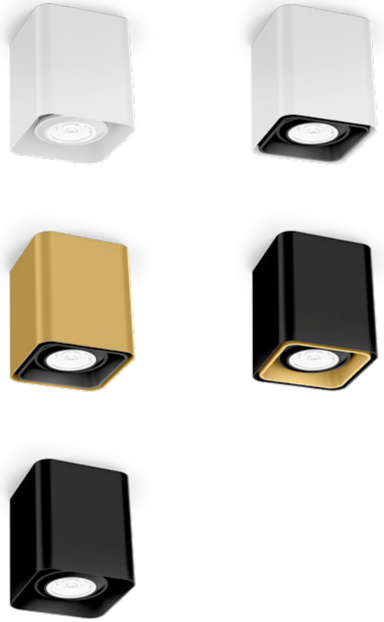



1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

	EUR	CODE
	64,00	
	65,00	
	64,00	



OPTIONAL

inner reflector max. 10W
polycarbonate

	EUR	CODE
	9,50	
	9,50	
	9,50	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905

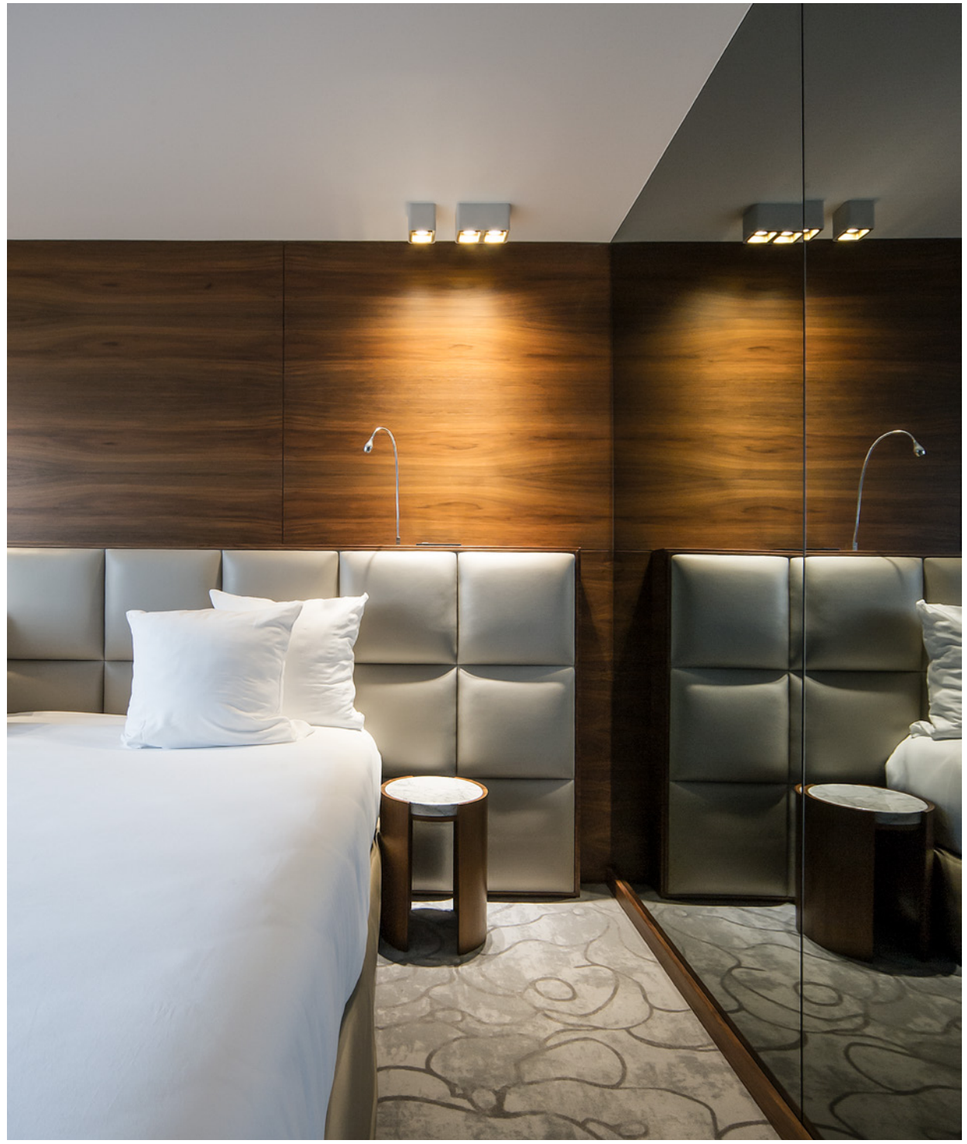

HOTEL HOWARD | ROQUE INTÉRIEURS PARIS | FRANCE

Ceiling surface









1.0 LED

LED COB 8W | dimmable
220-240VAC | 50-60Hz
aluminium

IP20 M-21° L70|50K

phase-cut dim

	EUR	CODE
	180,00	
	181,00	
	180,00	

DALI

	EUR	CODE
	203,00	
	204,00	
	203,00	

LIGHT COLOUR	LUMEN|CRI	CODE
2700K	610|>90	3
3000K	630|>90	5
2000-3000K*	420|>90	9

*only for phase-cut dim

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

	EUR	CODE
	73,00	
	74,00	
	73,00	

2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

	EUR	CODE
	139,00	
	143,00	
	139,00	



OPTIONAL

inner cover max. 10W
aluminium | **2.0** 2 pieces needed

	EUR	CODE
	23,00	
	23,00	
	23,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905

back

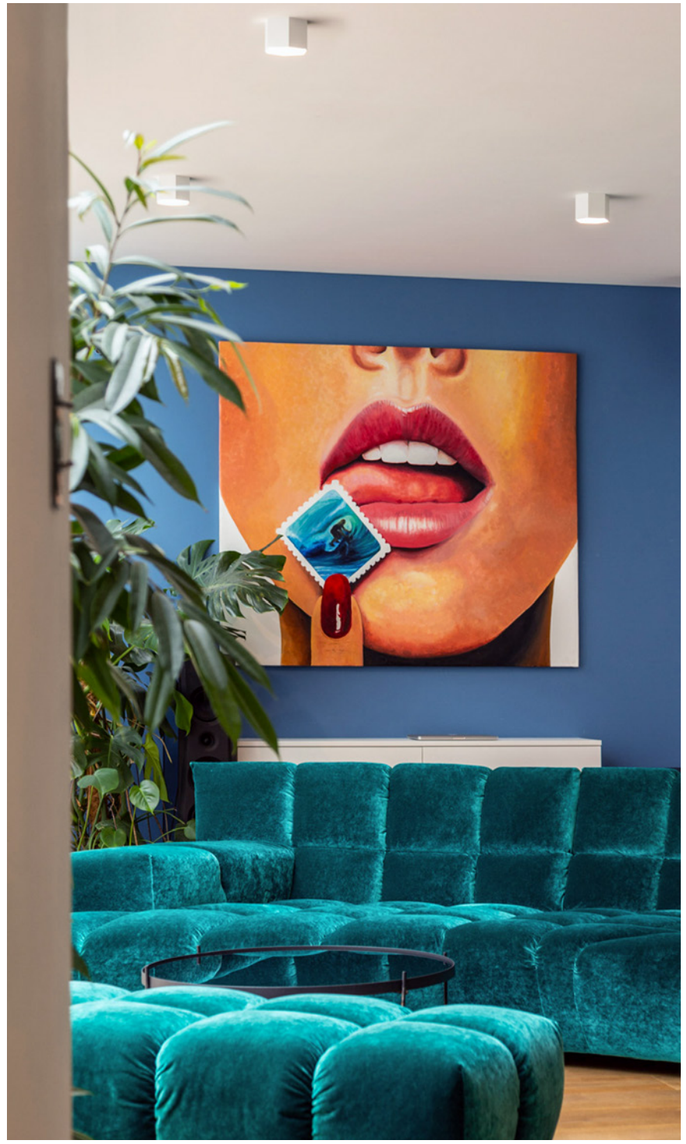

PRIVATE RESIDENCE | TOM BEIGE / *NESS HUNGARY

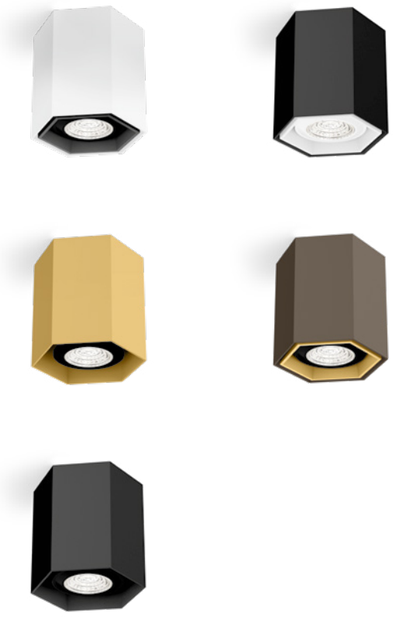

Ceiling surface





375 | 391



505 | 531



611



82

81

1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

	EUR	CODE
	64,00	
	65,00	
	65,00	
	64,00	



reflector

OPTIONAL

inner reflector max. 10W
polycarbonate

	EUR	CODE
	9,50	
	9,50	
	9,50	
	9,50	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905

back



PRIVATE RESIDENCE | **CONCEPT'N** BELGIUM

Ceiling surface













1.0 LED

LED COB 8W | dimmable
220-240VAC | 50-60Hz
aluminium

IP20 M-21° L70|50K

phase-cut dim

	EUR	CODE
	180,00	
	181,00	
	181,00	
	181,00	
	180,00	

DALI

	EUR	CODE
	203,00	
	204,00	
	204,00	
	204,00	
	203,00	

LIGHT COLOUR	LUMEN|CRI	CODE
2700K	670|>90	3
3000K	700|>90	5
2000-3000K*	470|>90	9

*only for phase-cut dim



OPTIONAL

inner cover max. 10W
aluminium | **2.0** 2 pieces needed

	EUR	CODE
	23,00	
	23,00	
	23,00	

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

	EUR	CODE
	73,00	
	74,00	
	74,00	
	74,00	
	73,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905

2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

	EUR	CODE
	139,00	
	143,00	
	143,00	
	143,00	
	139,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905



PRIVATE RESIDENCE | SYNOPSIS ARCHITECTURE BELGIUM

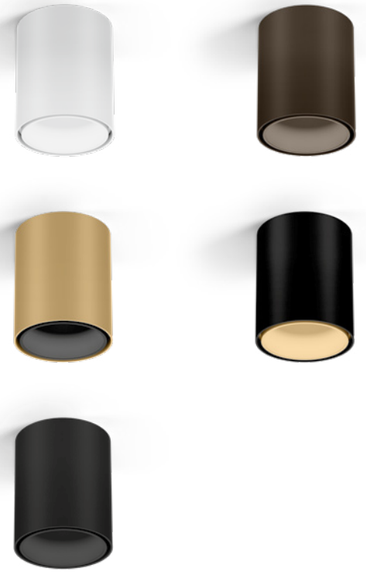

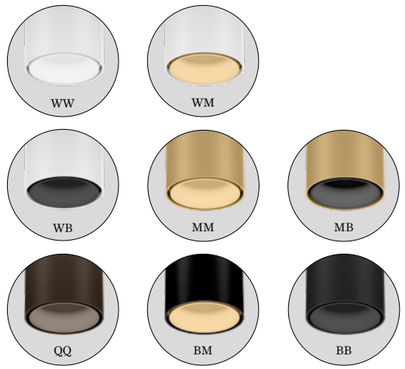

LOXONE VERSIONS ONLINE

Ceiling surface

375 | 391
507 | 535
613



1.0 LED

LED COB 7W | phase-cut dim
220-240VAC | 50-60Hz
incl. driver | aluminium

IP20 M-30° L80|55K

	EUR	CODE
	98,00	
	98,00	
	98,00	
	99,00	
	99,00	
	98,00	
	99,00	
	98,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	450	>90	3
3000K	480	>90	5

back



HOTEL MARTIN'S RENTMEESTERIJ | PCP ARCHITECTS BILZEN | BELGIUM

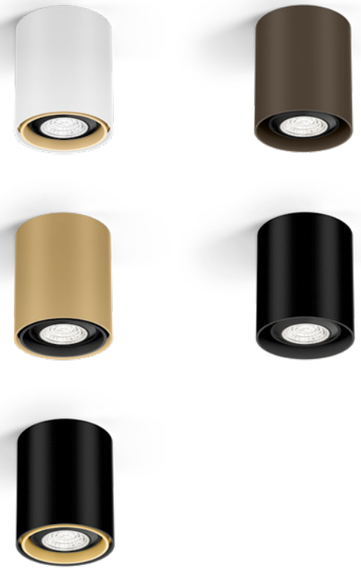

Ceiling surface

375 | 391

507 | 535

613



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

	EUR	CODE
	57,00	
	58,00	
	58,00	
	58,00	
	57,00	



OPTIONAL

inner reflector max. 10W
polycarbonate

	EUR	CODE
	9,50	
	9,50	
	9,50	
	9,50	
	9,50	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905

back



MAISONME BOUTIQUE HOTEL | ALICE PIUBELLO BARDOLINO LAKE GARDA | ITALY

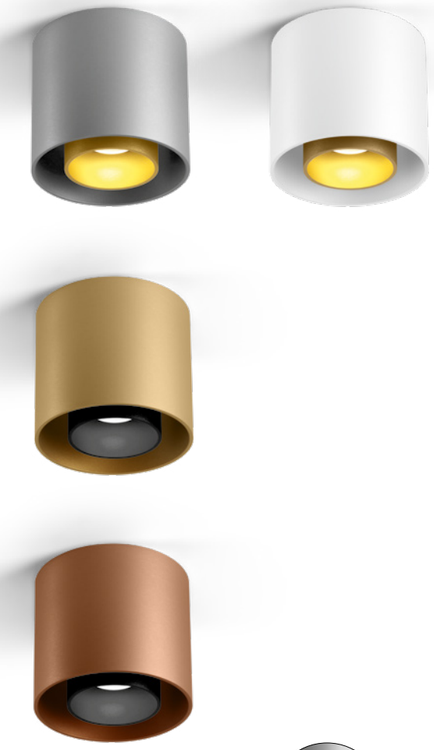





1.0 LED

LED COB 8W | dimmable
220-240VAC | 50-60Hz
aluminium

IP20 M-21° L70|50K

phase-cut dim

	EUR	CODE
	175,00	
	176,00	
	176,00	
	176,00	
	176,00	
	176,00	
	175,00	

DALI

	EUR	CODE
	198,00	
	199,00	
	199,00	
	199,00	
	199,00	
	199,00	
	198,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	670	>90	3
3000K	700	>90	5
2000-3000K*	470	>90	9

*only for phase-cut dim

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

	EUR	CODE
	68,00	
	69,00	
	69,00	
	69,00	
	69,00	
	69,00	
	68,00	



OPTIONAL

inner cover max. 10W
aluminium

	EUR	CODE
	23,00	
	23,00	
	23,00	
	23,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905

back

341 | 377 | 393
537
615
759
805

PRIVATE RESIDENCE | AGENCE VÉRONIQUE COTRE | FRANCE

Ceiling surface





1.0

LED COB 6W | phase-cut dim
220-240V | 50-60Hz | incl. driver
aluminium

IP20 M-27° L80|50K

	EUR	CODE
	135,00	
	135,00	
	136,50	
	135,00	
	135,00	
	136,50	
	135,00	

LIGHT COLOUR	LUMEN|CRI	CODE
2700K	480|>90	3
3000K	510|>90	5

LOXONE VERSIONS ONLINE

back



PRIVATE RESIDENCE | ELLEMVIE - ART & INTERIEUR THE NETHERLANDS





2.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-25°|355° M-31° L80|50K



	EUR	CODE
	172,00	
	172,00	
	174,00	
	172,00	
	172,00	
	172,00	
	172,00	
	174,00	
	172,00	

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	555 | >90	3
3000K	585 | >90	5
2000-3000K	470 | >90	9

LED module 20 years replaceability

MORE VERSIONS + LOXONE ONLINE

back









1.0 LED

LED COB 13W | dimmable
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-25°|355° M-34° L80|55K

phase-cut dim

	EUR	CODE
	185,00	
	185,00	
	188,00	
	185,00	
	185,00	
	188,00	
	185,00	

DALI-2 | push dim

	EUR	CODE
	216,00	
	216,00	
	219,00	
	216,00	
	216,00	
	219,00	
	216,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	855	>90	3
3000K	905	>90	5
2000-3000K	695	>90	9

LED module 20 years replaceability

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-25°|355°

	EUR	CODE
	116,00	
	116,00	
	119,00	
	116,00	
	116,00	
	119,00	
	116,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905















MORE VERSIONS + LOXONE ONLINE







PRIVATE RESIDENCE | STUDIO FOOLEN THE NETHERLANDS

DESIGN AWARD 2024

reddot winner 2023

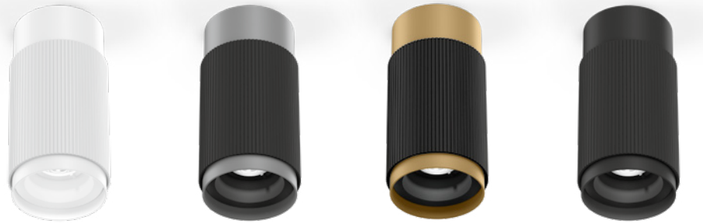

Ceiling surface

351

511 | 547

593



1.0

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-27° L80|50K

	EUR	CODE
	155,00	
	157,00	
	157,00	
	155,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	480	>90	3
3000K	510	>90	5

back



PRIVATE RESIDENCE GREECE

DESIGN AWARD 2024

reddot winner 2023

Ceiling surface

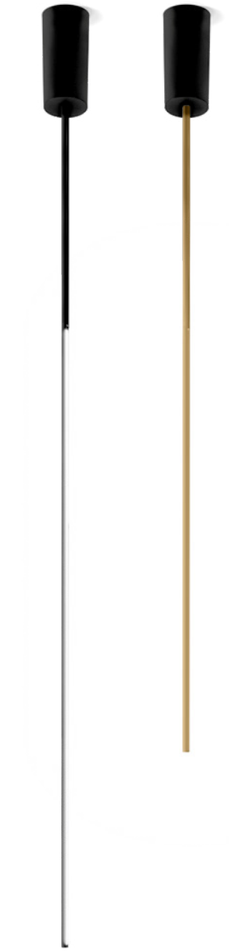



1.0

LED PCB 5W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser

IP20 L80|50K

	EUR	CODE
	265,00	
	265,00	
	265,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	450	>90	3
3000K	485	>90	5



2.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser

IP20 L80|50K

	EUR	CODE
	275,00	
	275,00	
	275,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	675	>90	3
3000K	730	>90	5



3.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser

IP20 L80|50K

	EUR	CODE
	310,00	
	310,00	
	310,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	900	>90	3
3000K	975	>90	5

OPTIONAL

cover plate adapter for concrete housing

	EUR	CODE
	12,50	







reddot winner 2024

441

681



1.0

LED PCB 24W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | indir. light

IP20 180° L80|100K



2700K | CRI >90 | 2x905lm

	EUR	CODE
	425,00	

back



351

511 | 547

593



1.0

LED COB 26W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 180° M-30° L80|50K

2700K | CRI >90 | 4x360lm

	EUR	CODE
	425,00	
	425,00	



back



Ceiling surface

169

701



1.0

LED COB 25W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal glass

IP20 180° L80|50K

2700K | CRI >90 | 4x250lm

	EUR	CODE
	525,00	



back



PRIVATE RESIDENCE | KWADRAAT BELGIUM

Ceiling surface

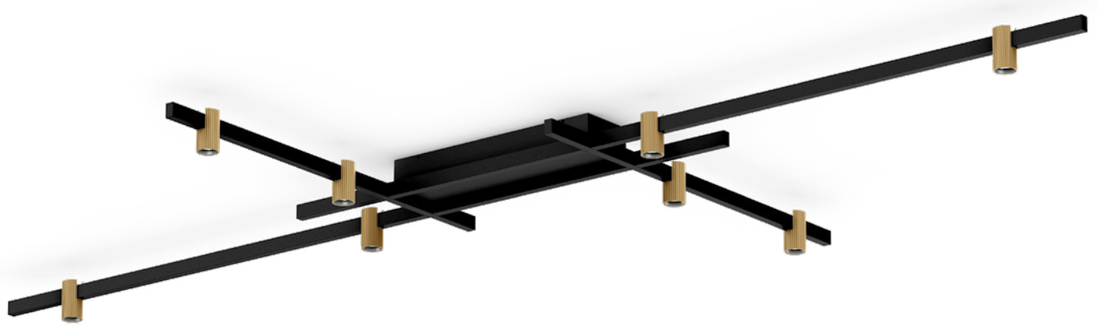



1.0

LED COB 41W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
direct light

IP20 M-30° L80|50K

2700K | CRI >90 | 8x415lm

	EUR	CODE
	695,00	
	695,00	



2.0

LED PCB/COB 35W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
dir./indir. light

IP20 M-30° L80|50K

2700K | CRI >90 | 4x415/2x480lm

	EUR	CODE
	645,00	
	645,00	



Ceiling surface

169

701



1.0

LED COB 40W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal glass
direct light

IP20 L80|50K

2700K | CRI >90 | 8x220lm

	EUR	CODE
	785,00	
	785,00	

back



OFFICE RPD | VIVA ARCHITECTURE ANTWERP | BELGIUM

CREATE YOUR OWN VENN

Ceiling surface

683





1.0

LED PCB 42W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
opal PMMA cover indirect light

IP20 L70|55K

	EUR	CODE
	680,00	
	680,00	
	680,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	3410	>90	3
3000K	3510	>90	5

2.0

LED PCB 49W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
opal PMMA cover dir./indir. light

IP20 L70|55K

	EUR	CODE
	770,00	
	770,00	
	770,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	480/3920	>90	3
3000K	495/4035	>90	5

back



PRIVATE RESIDENCE | STUDIO REE THE NETHERLANDS

Ceiling surface









1.0

QT14 max. 5W | G9
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass

IP20

	EUR	CODE
	165,00	

OPTIONAL

QT14 3.5W | G9 | phase-cut dim clear

	EUR	CODE
2700K | 340lm	18,00	
3000K | 350lm	18,00	

2.0

C35 max. 6W | E14
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass

IP20

	EUR	CODE
	245,00	

OPTIONAL

C35 5.5W | E14 | phase-cut dim | opal

	EUR	CODE
2700K | 450lm	10,50	

3.0

A60 max. 12W | E27
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass

IP20

	EUR	CODE
	325,00	

OPTIONAL

A60 9W | E27 | phase-cut dim | opal

	EUR	CODE
2700K | 800lm	14,50	

back



PRIVATE RESIDENCE | STUDIO REE THE NETHERLANDS



IBIS STYLES PREVESSIN | FORTY STUDIO GENÈVE | SWITZERLAND









1.0

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium
one side reflective composite panel

IP20

	EUR	CODE
	208,00	
	208,00	
	208,00	
	208,00	

OPTIONAL

A60 5.5W | E27 | phase-cut dim
gold mirror

	EUR	CODE
2700K | 405lm	32,00	

A60 5.5W | E27 | phase-cut dim
silver mirror

	EUR	CODE
2700K | 405lm	32,00	

2.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium
one side reflective composite panel

IP20

	EUR	CODE
	256,00	
	256,00	
	256,00	
	256,00	

OPTIONAL

G95 5W/5.1W | E27 | phase-cut dim
gold mirror

	EUR	CODE
2200K | 370lm	35,00	
2700K | 410lm	35,00	

G95 5W | E27 | phase-cut dim
silver mirror

	EUR	CODE
2700K | 395lm	35,00	

3.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium
one side reflective composite panel

IP20

	EUR	CODE
	416,00	
	416,00	
	416,00	
	416,00	

OPTIONAL

G95 5W/5.1W | E27 | phase-cut dim
gold mirror

	EUR	CODE
2200K | 370lm	35,00	
2700K | 410lm	35,00	

G95 5W | E27 | phase-cut dim
silver mirror

	EUR	CODE
2700K | 395lm	35,00	

467
625
721 | 733









2.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | PET felt material
noise absorbing material

IP20

	EUR	CODE
	256,00	
	256,00	
	256,00	
	256,00	

3.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | PET felt material
noise absorbing material

IP20

	EUR	CODE
	416,00	
	416,00	
	416,00	
	416,00	

OPTIONAL

G95 5W/5.1W | E27 | phase-cut dim
gold mirror

	EUR	CODE
2200K | 370lm	35,00	
2700K | 410lm	35,00	

G95 5W | E27 | phase-cut dim
silver mirror

	EUR	CODE
2700K | 395lm	35,00	

G95 10W | E27 | phase-cut dim | opal

	EUR	CODE
2700K | 1060lm	33,00	

G95 4.5W | E27 | phase-cut dim | clear

	EUR	CODE
2700K | 375lm	33,00	

OPTIONAL

G95 5W/5.1W | E27 | phase-cut dim
gold mirror

	EUR	CODE
2200K | 370lm	35,00	
2700K | 410lm	35,00	

G95 5W | E27 | phase-cut dim
silver mirror

	EUR	CODE
2700K | 395lm	35,00	

G95 10W | E27 | phase-cut dim | opal

	EUR	CODE
2700K | 1060lm	33,00	

G95 4.5W | E27 | phase-cut dim | clear

	EUR	CODE
2700K | 375lm	33,00	

471

629





557

631



1.0

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white opal glass hand blown

IP20 L80|50K

	EUR	CODE
	287,00	
	309,00	
	309,00	
	309,00	
	287,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	780	>90	3
3000K	825	>90	5



2.0

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white opal glass hand blown

IP20 L80|50K

	EUR	CODE
	427,00	
	459,00	
	459,00	
	459,00	
	427,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	780	>90	3
3000K	825	>90	5



3.0

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white opal glass hand blown

IP20 L80|50K

	EUR	CODE
	547,00	
	581,00	
	581,00	
	581,00	
	547,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	770	>90	3
3000K	815	>90	5

back



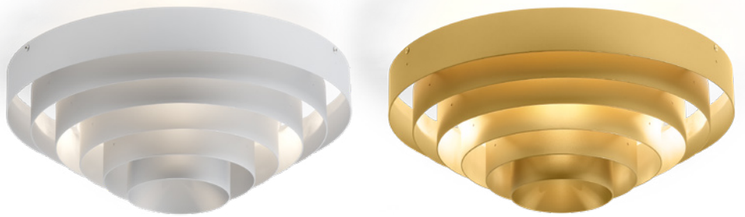

Ceiling surface

479

633



03

3x A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium

IP20

	EUR	CODE
	865,00	
	865,00	

OPTIONAL

A60 3.8W | E27 | phase-cut dim
gold tinted

	EUR	CODE
2200K | 245lm	31,00	

A60 5.6W | E27 | phase-cut dim | clear

	EUR	CODE
2700K | 480lm	31,00	















2.0 WIRO

A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel

IP20

	EUR	CODE
	275,00	
	275,00	

OPTIONAL

A60 3.8W | E27 | phase-cut dim
gold tinted

	EUR	CODE
2200K | 245lm	31,00	

A60 5.6W | E27 | phase-cut dim | clear

	EUR	CODE
2700K | 480lm	31,00	

1.8 WIRO

T30 max. 25W | E27
220-240VAC | 50-60Hz
aluminium | steel

IP20

	EUR	CODE
	315,00	
	315,00	

OPTIONAL

T30-225 5.3W | E27 | phase-cut dim
gold tinted

	EUR	CODE
2200K | 380lm	39,00	
2700K | 425lm	39,00	

1.0 CONE

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel

IP20

	EUR	CODE
	295,00	
	295,00	

OPTIONAL

T30-225 5.3W | E27 | phase-cut dim
gold tinted

	EUR	CODE
2200K | 380lm	39,00	
2700K | 425lm	39,00	

3.8 WIRO

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel

IP20

	EUR	CODE
	407,00	
	407,00	

OPTIONAL

T30-225 5.3W | E27 | phase-cut dim
gold tinted

	EUR	CODE
2200K | 380lm	39,00	
2700K | 425lm	39,00	









1.0 MICROPRISMATIC

LED PCB 35W | DALI-2 | push dim
220-240VAC | 50-60Hz | incl. driver
aluminium
microprismatic PMMA cover

IP20 L80|60K UGR ≤ 19/65°

	EUR	CODE
	745,00	
	745,00	

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	3660	>90	5
4000K	3660	>90	7

1.0 OPAL

LED PCB 35W | DALI-2 | push dim
220-240VAC | 50-60Hz | incl. driver
aluminium
opal PMMA cover

IP20 L80|60K

	EUR	CODE
	725,00	
	725,00	

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	3700	>90	5
4000K	3700	>90	7





169

701









1.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal glass

IP44 L80|50K

	EUR	CODE
	188,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	520	>95	3
3000K	550	>95	5
4000K	580	>95	7

2.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal glass

IP44 L80|50K

	EUR	CODE
	198,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	600	>95	3
3000K	630	>95	5
4000K	665	>95	7

3.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal glass

IP44 L80|50K

	EUR	CODE
	218,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	645	>95	3
3000K	665	>95	5
4000K	705	>95	7

back



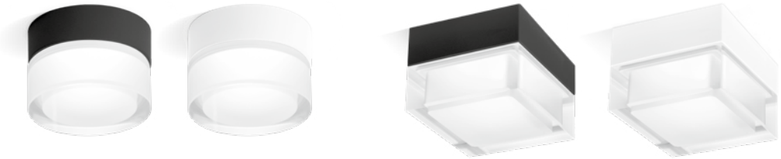





1.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | clear and opal PMMA cover

IP44 L80|60K

3000K | CRI >90 | 640lm

	EUR	CODE
	185,00	
	185,00	

2.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | clear and opal PMMA cover

IP44 L80|60K

3000K | CRI >90 | 640lm

	EUR	CODE
	195,00	
	195,00	





Ceiling surface

165

747

757

803



1.0

LED COB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
opal glass convex lens

IP65 W-105° L80|55K

	EUR	CODE
	198,00	
	198,00	
	198,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	455	>90	3
3000K	510	>90	5



GAW HOPPEHOF ERTVELDE | BELGIUM









1.6

LED PCB 13W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA cover

IP44 L80|60K

	EUR	CODE
	168,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1170	>90	3
3000K	1220	>90	5

2.6

LED PCB 19W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA cover

IP44 L80|60K

	EUR	CODE
	245,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1800	>90	3
3000K	1810	>90	5

3.5

LED PCB 32W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA cover

IP44 L80|60K

	EUR	CODE
	335,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	3340	>90	3
3000K	3360	>90	5

769

back



ORL PRAXIS SEMADENI | EMULSION INNENARCHITEKTUR CHUR | SWITZERLAND

Ceiling surface









1.6

LED PCB 13W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA cover

IP44 L80|60K

	EUR	CODE
	218,00	
	218,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1080	>90	3
3000K	1130	>90	5

2.6

LED PCB 19W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA cover

IP44 L80|60K

	EUR	CODE
	318,00	
	318,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1670	>90	3
3000K	1680	>90	5

3.5

LED PCB 32W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA cover

IP44 L80|60K

	EUR	CODE
	428,00	
	428,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	3090	>90	3
3000K	3100	>90	5

back



PRIVATE RESIDENCE | FORUM OFFICE BELGIUM











1.0

LED PCB 13W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | steel
opal PMMA cover

IP44 L80|60K

	EUR	CODE
	252,00	
	255,00	
	255,00	
	255,00	
	252,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1070	>90	3
3000K	1110	>90	5

2.0

LED PCB 19W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | steel
opal PMMA cover

IP44 L80|60K

	EUR	CODE
	361,00	
	365,00	
	365,00	
	365,00	
	361,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1650	>90	3
3000K	1660	>90	5

3.0

LED PCB 32W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | steel
opal PMMA cover

IP44 L80|60K

	EUR	CODE
	472,00	
	479,00	
	479,00	
	479,00	
	472,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	3050	>90	3
3000K	3060	>90	5















ø260



ø320



ø450





1.0

LED PCB 9/11/15W
220-240VAC | 50-60Hz | incl. driver
polycarbonate housing
output and light colour selectable via dip switch

IP54 L80|50K

3000K/4000K/6000K | CRI >90
960lm/1170lm/1630lm

EUR	CODE
79,00	

2.0

LED PCB 10/15/20W
220-240VAC | 50-60Hz | incl. driver
polycarbonate housing
output and light colour selectable via dip switch

IP54 L80|50K

3000K/4000K/6000K | CRI >90
1270lm/1810lm/2360lm

EUR	CODE
129,00	

3.0

LED PCB 28/33/37W
220-240VAC | 50-60Hz | incl. driver
polycarbonate housing
output and light colour selectable via dip switch

IP54 L80|50K

3000K/4000K/6000K | CRI >90
4350lm/5000lm/5570lm

EUR	CODE
225,00	

771

back

Track / System

STREX TRACK



48V

313 321 325 327 329



331 333 335 337 339 341



343 343 345 347 351 353



357 359

1-PHASE TRACK



1-PHASE TRACKS

361 363 365 369 371



373 375 375 377 377 379



383

3-PHASE TRACK



3-PHASE TRACKS

385 387 389 391 391



393 393 395

SYSTEM



397 401 405 409

track

	STREX 48V DALI page 313	1-PHASE TRACK 220–240V page 361	3-PHASE TRACK 220–240V DALI page 385
1 CHOOSE YOUR MOUNTING	 recessed surface suspended suspended indirect	 recessed surface suspended	 surface suspended
2 INSTALL IT IN YOUR LAYOUT			
3 CHOOSE YOUR DRIVER	 remote in-line in-track ceiling		
4 COMBINE IT WITH INSETS			

For more support and an extended layout of track systems, please check our FAQ section at

back

mounting

48V *system*

CEILING RECESSED



STREX RECESSED

track 48V | 15A | DALI

SELV 31-33 65 5-25

		EUR	CODE
	1m	115,00	
	1m	115,00	
	2m	235,00	
	2m	235,00	
	3m	349,00	
	3m	349,00	



M | MOUNTING BRACKET

recessed mounting bracket
for 1m - 2pcs needed | for 2m - 4pcs needed | for 3m - 6pcs needed

	EUR	CODE
	12,50	



E | END CAP

	EUR	CODE
	12,00	
	12,00	

CEILING SURFACE



STREX SURFACE

track 48V | 15A | DALI

SELV

		EUR	CODE
	1m	89,00	
	1m	89,00	
	2m	174,00	
	2m	208,00	
	2m	208,00	
	2m	208,00	
	2m	174,00	
	3m	258,00	
	3m	309,00	
	3m	309,00	904213M0
	3m	309,00	904213Q0
	3m	258,00	904213B0



E | END CAP

	EUR	CODE
	7,50	
	8,00	
	8,00	
	7,50	

CEILING SUSPENDED



STREX SUSPENDED

track 48V | 15A | DALI

SELV

		EUR	CODE
	1m	89,00	
	1m	89,00	
	2m	174,00	
	2m	208,00	
	2m	208,00	
	2m	208,00	
	2m	174,00	
	3m	258,00	
	3m	309,00	
	3m	309,00	904213M0
	3m	309,00	904213Q0
	3m	258,00	904213B0



STREX SUSP. INDIRECT

track 48V | 15A | DALI | with indirect light | 3.0m suspension sets already included | 15W/m

SELV

3000K | CRI >90 | 1900lm

		EUR	CODE
	2m	575,00	
	2m	575,00	

3000K | CRI >90 | 2850lm

		EUR	CODE
	3m	675,00	
	3m	675,00	



S | SUSPENSION SET

complete suspension set | incl. ceiling fixation bracket | not needed for indirect light version | for 1m - 2pcs needed | for 2m - 3pcs needed
for 3m - 4pcs needed

stainless steel colour

		EUR	CODE
	max. 1.5m	29,00	
	max. 3m	31,00	

black colour

		EUR	CODE
	max. 1.5m	29,00	
	max. 3m	31,00	



E | END CAP

	EUR	CODE
	7,50	
	8,00	
	8,00	
	7,50	

back

layout

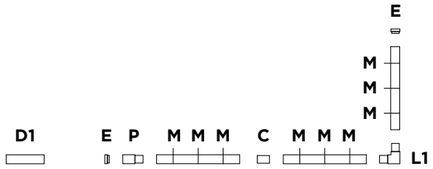

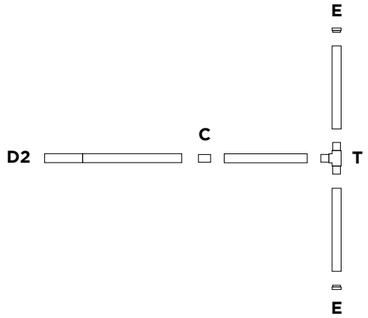



48V *system*

M | S | E
Choose your mounting
on page 312

D | P
Choose your driver | power feed
on page 316

GOOD TO KNOW
Electrical components of champagne or bronze connectors and drivers will be black.

ALL MOUNTINGS



BLANK COVER

		EUR	CODE
	2m	51,00	
	2m	51,00	



C | CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector

	EUR	CODE
	40,00	
	40,00	

CEILING RECESSED



L1 | L-CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector left and right

	EUR	CODE
	181,00	
	181,00	



L2 | L-CONNECTOR NON ELECTRICAL

only needed 1x for square installation

	EUR	CODE
	181,00	
	181,00	

CEILING SURFACE | SUSPENDED



L1 | L-CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector left and right

	EUR	CODE
	118,00	
	121,00	
	121,00	
	118,00	



L2 | L-CONNECTOR NON ELECTRICAL

only needed 1x for square installation

	EUR	CODE
	118,00	
	121,00	
	121,00	
	118,00	



T | T-CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector

	EUR	CODE
	198,00	
	198,00	



X | X-CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector

	EUR	CODE
	224,00	
	224,00	

back

driver

48V *system*

CEILING RECESSED | SURFACE



D1 | REMOTE DRIVER

remote converter | 220-240VAC
50-60Hz | 48V | for connection to
power feed adapter

220-240V — 48V

		EUR	CODE
	100W | 48V	89,00	
	150W | 48V	108,00	

for more information see page 917



P | POWER FEED

48V | 15A | DALI | end/middle power
feed adapter | max. 4 x 1.5mm²

		EUR	CODE
		38,00	
		38,00	



D2 | IN LINE DRIVER SURFACE

220-240VAC | 50-60Hz | 48V
incl. power end feed adapter
incl. DALI through wiring

220-240V DALI SELV IN — 48V DALI SELV OUT

		EUR	CODE
	100W	278,00	
	100W	278,00	
	150W	288,00	
	150W	288,00	



D3 | IN TRACK DRIVER SURFACE

220-240VAC | 50-60Hz | 48V
incl. power end feed function
with in line connection box

220-240V — 48V

		EUR	CODE
	100W	239,00	
	100W	242,00	
	100W	242,00	
	100W	239,00	



		EUR	CODE
	250W	279,00	
	250W	282,00	
	250W	282,00	
	250W	279,00	



D4 | IN TRACK DRIVER SURFACE

220-240VAC | 50-60Hz | 48V
incl. power middle/end feed function
with in track connection

220-240V — 48V

		EUR	CODE
	100W	228,00	
	100W	228,00	



		EUR	CODE
	250W	268,00	
	250W	268,00	

CEILING SUSPENDED



D1 | CEILING DRIVER

220-240VAC | 50-60Hz | 48V
incl. power middle/end feed adapter
incl. DALI through wiring
driver ceiling mounted

220-240V DALI SELV IN — 48V DALI SELV OUT

		EUR	CODE
	100W	298,00	
	100W	298,00	
	150W	318,00	
	150W	318,00	



D2 | IN LINE DRIVER

220-240VAC | 50-60Hz | 48V
incl. power end feed adapter
incl. DALI through wiring
suspended driver in line with profile

220-240V DALI SELV IN — 48V DALI SELV OUT

		EUR	CODE
	100W	325,00	
	100W	325,00	
	150W	348,00	
	150W	348,00	



D3 | IN TRACK DRIVER

220-240VAC | 50-60Hz | 48V
incl. power end feed function
incl. 3m power cable
suspended driver in the profile

220-240V — 48V

		EUR	CODE
	100W	268,00	
	100W	271,00	
	100W	271,00	
	100W	268,00	



		EUR	CODE
	250W	315,00	
	250W	315,00	



D4 | REMOTE DRIVER

220-240VAC | 50-60Hz | 48V
incl. power end feed function
incl. 3m power cable
incl. remote driver

220-240V — 48V

		EUR	CODE
	100W	238,00	
	100W	238,00	
	150W	258,00	
	150W	258,00	



		EUR	CODE
	250W	285,00	
	250W	285,00	

back

control

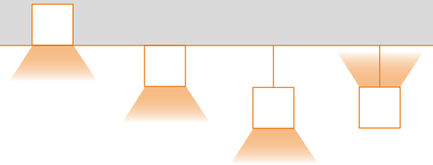

ALL MOUNTINGS



WIRELESS CASAMBI CONTROL

8W | adapter for wireless control
of 64 DALI fixtures in max. 8 groups

	EUR	CODE
	515,00	
	515,00	

Qu’est-ce qui rend le système STREX si intéressant ? Il offre d’innombrables possibilités. Allumer ou varier l’intensité de vos luminaires est très simple avec DALI. Et si vous ne souhaitez pas installer un système câblé, optez pour une configuration plus flexible – il vous suffit d’un module de commande Casambi et d’inserts DALI compatibles.

DOWNLOAD THE CASAMBI APP

Google Play Store

App Store

CREATE A SCENE FOR YOUR
INDIVIDUAL LIGHTING SOLUTION



131
181
585





1.0

LED COB 10W | 48V
aluminium | PC adapter

IP20 0-90°|355° M-31° L70|55K

non dim

	EUR	CODE
	168,00	
	168,00	
	168,00	
	168,00	
	168,00	

DALI-2

	EUR	CODE
	255,00	
	255,00	
	255,00	
	255,00	
	255,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	480	>90	3
3000K	510	>90	5

accessories on page 910

2.0

LED COB 17W | 48V
aluminium | PC adapter

IP20 0-90°|355° M-31° L70|55K

non dim

	EUR	CODE
	258,00	
	258,00	
	258,00	
	258,00	
	258,00	

DALI-2

	EUR	CODE
	335,00	
	335,00	
	335,00	
	335,00	
	335,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x480	>90	3
3000K	2x510	>90	5

accessories on page 910



OPTIONAL

honeycomb louver

	EUR	CODE
	14,50	

PRIVATE RESIDENCE | STUDIO BENOIT BELGIUM

back







PRIVATE RESIDENCE | STUDIO BINNEN THE NETHERLANDS

48V *system*

135
189
569



1.0

LED COB 7W | 48V
aluminium | PC adapter

IP20 0-90°|350° M-31° L80|50K

non dim

	EUR	CODE
	178,00	
	178,00	
	178,00	

DALI-2

	EUR	CODE
	264,00	
	264,00	
	264,00	

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	585 | >90	3
3000K	620 | >90	5



OPTIONAL

honeycomb louver

	EUR	CODE
	14,50	

back





1.0

LED COB 7W | 48V
aluminium | glass | PC adapter

IP20 0-90°|350° M-25° L80|50K

non dim

	EUR	CODE
	176,00	107452WLS_
	176,00	107452WFJ_
	176,00	1
	176,00	
	176,00	

DALI-2

	EUR	CODE
	262,00	107455WLS_
	262,00	107455WFJ_
	262,00	1
	262,00	
	262,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	560	>90	3
3000K	575	>90	5

back



RESTAURANT GARDENS | ANDREAS HUHN ARCHITEKTEN TÜBINGEN I GERMANY

DESIGN AWARD 2023 · GOOD DESIGN · reddot winner 2023



1.0

LED COB 10W | 48V
aluminium | PC adapter

IP20 0-90°|360° M-30° L80|50K

non dim

	EUR	CODE
	176,00	
	182,00	
	182,00	
	182,00	
	176,00	

DALI-2

	EUR	CODE
	262,00	
	268,00	
	268,00	
	268,00	
	262,00	

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	530 | >90	3
3000K	560 | >90	5

accessories on page 910





1.0

LED PCB 5W | 48V
aluminium | PC adapter

IP20 0-90°|355° M-30° L80|50K

non dim

	EUR	CODE
	125,00	
	125,00	
	125,00	

DALI-2

	EUR	CODE
	185,00	
	185,00	
	185,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	326	>90	3
3000K	336	>90	5

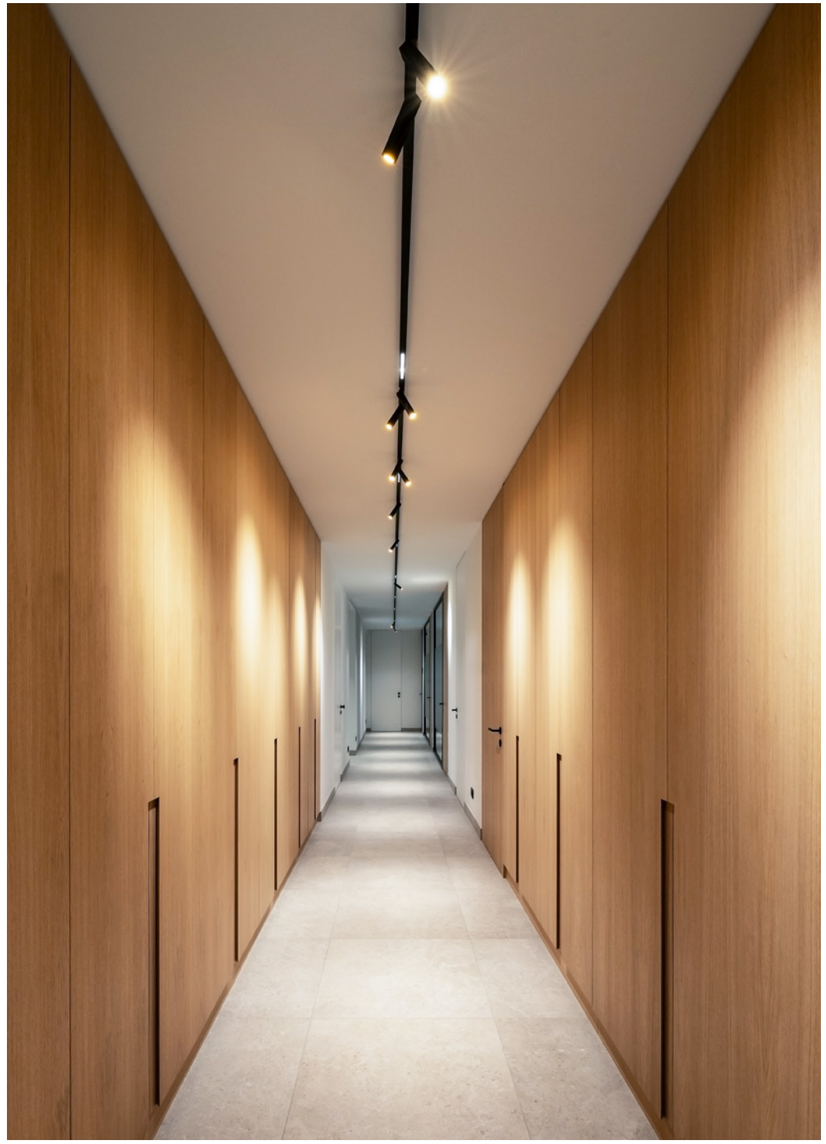

DENTAL PRACTICE M.K.A. | DMG ARCHITECTURAL SOLUTIONS KAPELLEN | BELGIUM

DESIGN AWARD 2021

reddot winner 2020
lighting design





1.0

LED COB 13W | 48V
aluminium | PC adapter

IP20 0-90°|360° M-23° L80|50K

non dim

	EUR	CODE
	189,00	
	189,00	

DALI-2

	EUR	CODE
	285,00	
	285,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	415	>90	3
3000K	435	>90	5

accessories on page 910

2.0

LED COB 22W | 48V
aluminium | PC adapter

IP20 0-90°|360° M-23° L80|50K

non dim

	EUR	CODE
	282,90	
	282,90	

DALI-2

	EUR	CODE
	389,00	
	389,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x445	>90	3
3000K	2x465	>90	5

accessories on page 910





1.0

LED COB 9W | 48V
aluminium

IP20 M-25° L80|55K

adapter | 2700K | CRI >90 | 505lm

		EUR	CODE
		188,00	258162W_3
		188,00	258162B_3
	DALI-2	236,00	258165W_3
	DALI-2	236,00	258165B_3

adapter | 3000K | CRI >90 | 535lm

		EUR	CODE
		188,00	258162W_5
		188,00	258162B_5
	DALI-2	236,00	258165W_5
	DALI-2	236,00	258165B_5

housing | inner reflector colour

CODE
W
WM
E
M
H
Q
CH
B

only for ceiling surface and suspended tracks

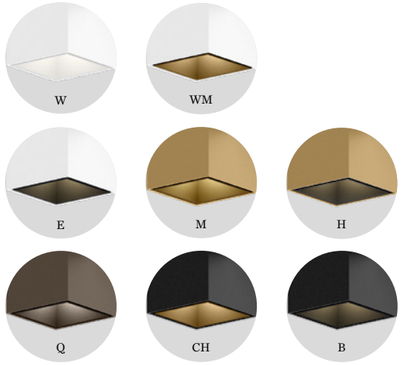

back





1.0

LED COB 9W | 48V
aluminium

IP20 M-Z5° L80|55K

adapter | 2700K | CRI >90 | 505lm

		EUR	CODE
		195,00	258362W_3
		195,00	258362B_3
	DALI-2	243,00	258365W_3
	DALI-2	243,00	258365B_3

adapter | 3000K | CRI >90 | 535lm

		EUR	CODE
		195,00	258362W_5
		195,00	258362B_5
	DALI-2	243,00	258365W_5
	DALI-2	243,00	258365B_5

housing | inner reflector colour

	CODE
	W
	J
	E
	K
	B

only for ceiling surface and suspended tracks

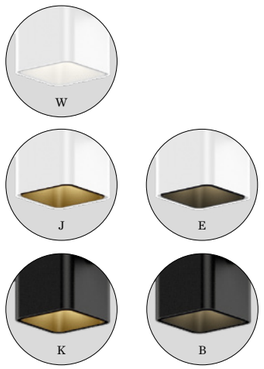

back

245

533



1.0

LED COB 9W | 48V
aluminium

IP20 M-25° L80|55K

adapter | 2700K | CRI >90 | 505lm

		EUR	CODE
		195,00	258462W_3
		195,00	258462B_3
	DALI-2	243,00	258465W_3
	DALI-2	243,00	258465B_3

adapter | 3000K | CRI >90 | 535lm

		EUR	CODE
		195,00	258462W_5
		195,00	258462B_5
	DALI-2	243,00	258465W_5
	DALI-2	243,00	258465B_5

housing | inner reflector colour

	CODE
	W
	J
	E
	Q
	K
	B

only for ceiling surface and suspended tracks

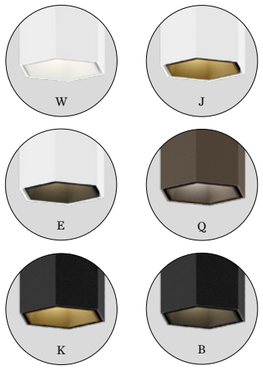

back



PRIVATE RESIDENCE | AJ ARCHITECTEN BELGIUM



1.0

LED COB 9W | 48V
aluminium

IP20 M-25° L80|55K

adapter | 2700K | CRI >90 | 485lm

		EUR	CODE
		188,00	258262W_3
		188,00	258262B_3
	DALI-2	236,00	258265W_3
	DALI-2	236,00	258265B_3

adapter | 3000K | CRI >90 | 515lm

		EUR	CODE
		188,00	258262W_5
		188,00	258262B_5
	DALI-2	236,00	258265W_5
	DALI-2	236,00	258265B_5

housing | inner reflector colour

CODE
W
WM
E
M
H
Q
CH
B

only for ceiling surface and suspended tracks

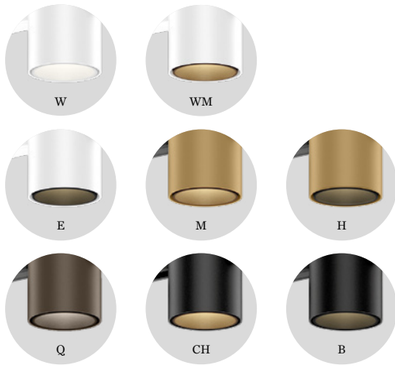

back

251
537
615
759
805



FORUM ADVOCATEN | VRV ARCHITECTEN ANTWERP | BELGIUM







1.0 DOT

LED PCB 9W | 48V
PC adapter | cover
PC lens

IP20 W-40° UGR≤19 L80|60K

non dim

	EUR	CODE
	278,00	
	278,00	

DALI

	EUR	CODE
	344,00	
	344,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	840	>90	3
3000K	860	>90	5

1.0 OPAL

LED PCB 15W | 48V
PC adapter | cover
PMMA opal cover

IP20 L80|60K

non dim

	EUR	CODE
	188,00	
	188,00	

DALI

	EUR	CODE
	228,00	
	228,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	620	>90	3
3000K	640	>90	5

2.0 OPAL

LED PCB 29W | 48V
PC adapter | cover
PMMA opal cover

IP20 L80|60K

non dim

	EUR	CODE
	269,00	
	269,00	

DALI

	EUR	CODE
	309,00	
	309,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1240	>90	3
3000K	1280	>90	5





MORE VERSIONS ONLINE

back



VOWA Kabel länger FJ+TB FJ check

easy cable adjustment



1.0

LED PCB 7W | 48V | DALI-2
aluminium | glass | PC adapter
black and T– black cable/adapter
others – white cable/adapter

IP20 M-40° L80|50K

2700K | CRI >90 | 480lm

	EUR	CODE
	277,00	
	277,00	
	277,00	
	285,00	
	277,00	



2.0

LED PCB 7W | 48V | DALI-2
aluminium | glass | PC adapter
black and T – black cable/adapter
others – white cable/adapter

IP20 M-40° L80|50K

2700K | CRI >90 | 510lm

	EUR	CODE
	282,00	
	282,00	
	282,00	
	290,00	
	282,00	



3.0

LED PCB 7W | 48V |DALI-2
aluminium | glass | PC adapter
black and T – black cable/adapter
others – white cable/adapter

IP20 M-40° L80|50K

2700K | CRI >90 | 520lm

	EUR	CODE
	287,00	
	287,00	
	287,00	
	295,00	
	287,00	



PRIVATE RESIDENCE | DÉVÉ CREATIONS THE NETHERLANDS

reddot winner 2023

48V *system* 61 | 137 | 153

193

415 | 509

571

589 | 685

723 | 729





3.0

LED COB 7W | 48V | DALI-2
aluminium | PC adapter
white fixtures – white cable/adapter
others – black cable/adapter

IP20 W-54° L80|50K

	EUR	CODE
	268,00	
	275,00	
	275,00	
	275,00	
	268,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	490	>90	3
3000K	520	>90	5

5.0

LED COB 7W | 48V | DALI-2
aluminium | PC adapter
white fixtures – white cable/adapter
others – black cable/adapter

IP20 W-54° L80|50K

	EUR	CODE
	281,00	
	290,00	
	290,00	
	290,00	
	281,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	490	>90	3
3000K	520	>90	5





MORE VERSIONS ONLINE

back



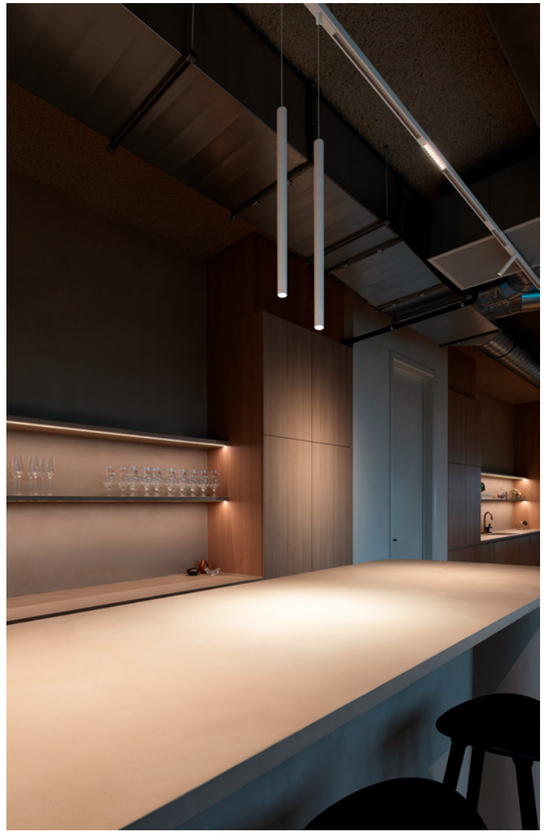



DESIGN AWARD 2024

reddot winner 2023

261 | 269 | 273

511 | 547

593 | 595



3.0

LED COB 7W | DALI-2
220-240VAC | 50-60Hz | incl. driver
aluminium
white fixtures – white cable/adapter
others – black cable/adapter

IP20 W-54° L80|50K

	EUR	CODE
	287,00	
	294,00	
	294,00	
	287,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	490	>90	3
3000K	520	>90	5



5.0

LED COB 7W | DALI-2
220-240VAC | 50-60Hz | incl. driver
aluminium
white fixtures – white cable/adapter
others – black cable/adapter

IP20 W-54° L80|50K

	EUR	CODE
	296,00	
	305,00	
	305,00	
	296,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	490	>90	3
3000K	520	>90	5

MORE VERSIONS ONLINE





PRIVATE RESIDENCE | TOM LIERMAN BUREAU VOOR ARCHITECTUUR & INTERIEUR BELGIUM

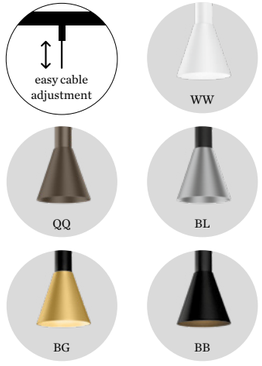

MORE VERSIONS ONLINE



1.2

LED COB 7W | 48V | DALI-2
aluminium | PC adapter
white fixtures – white cable/adapter
others – black cable/adapter

IP20 M-32° L70|55K

	EUR	CODE
	390,00	
	390,00	
	390,00	
	390,00	
	390,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	400	>90	3
3000K	445	>90	5



1.4

LED COB 7W | 48V | DALI-2
aluminium | PC adapter
white fixtures – white cable/adapter
others – black cable/adapter

IP20 M-32° L70|55K

	EUR	CODE
	332,00	
	332,00	
	332,00	
	332,00	
	332,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	450	>90	3
3000K	470	>90	5



1.6

LED COB 7W | 48V | DALI-2
aluminium | PC adapter
white fixtures – white cable/adapter
others – black cable/adapter

IP20 M-32° L70|55K

	EUR	CODE
	336,00	
	336,00	
	336,00	
	336,00	
	336,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	480	>90	3
3000K	505	>90	5

optional inner cover on page 910

517 | 539

599

back



PRIVATE RESIDENCE | WALRAVENS WEETS ARCHITECTEN
BELGIUM



1.0

LED PCB 5W | 48V | DALI-2
aluminium | glass | PC adapter
white fixtures – white cable/adapter
others – black cable/adapter

IP20 L80|100K

2700K | CRI >90 | 245lm

	EUR	CODE
	294,00	
	294,00	
	294,00	



back





1.0

LED COB 7W | 48V | DALI-2
aluminium | black cable
artisanal Italian hand blown glass
PC adapter

IP20 L80|50K

	EUR	CODE
	382,00	
	382,00	
	344,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	280	>90	3
3000K	290	>90	5



back

RECESSED | SURFACE | SUSPENDED EXAMPLES

configuration as seen from top view
for more support and extended layout of 1-phase tracks,
please check our FAQ section on





TRACK PROFILE

recessed | 220-240V | 16A

		EUR	CODE
	1m	62,00	
■	1m	62,00	
	2m	115,00	
■	2m	115,00	
	3m	152,00	
■	3m	152,00	



F | MOUNTING BRACKET

for recessed fixation

34-45 45 4-15

EUR	CODE
11,50	

for 1.0m - 2pcs needed
for 2.0m - 3pcs needed
for 3.0m - 4pcs needed



TRACK PROFILE

surface | suspended | 220-240V | 16A

		EUR	CODE
	1m	44,00	
■	1m	44,00	
	2m	88,00	
■	2m	88,00	
	3m	136,00	
■	3m	136,00	



G | SUSPENSION SET

complete suspension set
incl. ceiling fixation bracket

		EUR	CODE
	max. 1.5m	28,00	
■	max. 1.5m	28,00	
	max. 3m	33,00	
■	max. 3m	33,00	

for 1.0m - 2pcs needed
for 2.0m - 3pcs needed
for 3.0m - 4pcs needed

top view



A | END FEED 1.0

220-240V | max. 3 x 1.5mm² - 16A

	EUR	CODE
	15,50	
■	15,50	

top view



A | END FEED 2.0

220-240V | max. 3 x 1.5mm² - 16A

	EUR	CODE
	15,50	
■	15,50	

top view



B | MIDDLE FEED

straight
220-240V | max. 3 x 1.5mm² - 16A

	EUR	CODE
	37,00	
■	37,00	



C | END CAP LEFT/RIGHT

	EUR	CODE
	3,50	
■	3,50	

top view



D | L-FEED 1.0

220-240V | max. 3 x 1.5mm² - 16A

	EUR	CODE
	38,00	
■	38,00	

top view



D | L-FEED 2.0

220-240V | max. 3 x 1.5mm² - 16A

	EUR	CODE
	38,00	
■	38,00	

top view



E | STRAIGHT CONNECTOR

straight | 220-240V | 16A

	EUR	CODE
	14,00	
■	14,00	



COVERPLATE END FEED

only use with recessed tracks

	EUR	CODE
	9,50	
■	9,50	

more 1-phase track accessories on page 918

back





1.0

PAR11 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter

IP20 0°-90°|350°

	EUR	CODE
	72,00	
	72,00	

OPTIONAL

PAR11 4.3W | GU10 | phase-cut dim

	EUR	CODE
2700K | 225lm	14,50	
3000K | 235lm	14,50	



ENSO BOUTIQUE HOTEL | TIM DE TAEYE & TINE VANPARIJS KNOKKE-HEIST | BELGIUM



1.0 LED

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter

IP20 0-90°|355° M-34° L70|55K

	EUR	CODE
	158,00	
	164,00	
	164,00	
	158,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	655	>80	3
3000K	700	>80	5


black ring LED


W


G


PAR16


K


B



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter

IP20 0-90°|355°

	EUR	CODE
	88,00	
	94,00	
	94,00	
	88,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905


TRUKIKORA
5
RENTALKER
BONI
PHIL OÜ
APEX AB
NOKA OÜ
BROMPRO STUDIO
CHAMS OÜ
PODIMAL 1311
LOCO STUDIO
RIVE EESTI OÜ
TALJAARI OÜ
KÄRT HANNER
BRITT SAMSON
DESIGNKEA OÜ
VIRGO CERAMICS
FUTULINE OÜ
PLATVORM
TRINE VENTURES OÜ
KNOTSI2 HOLDING OÜ
LAURA NESTOR STUDIOS
TEAMSCOPE / EXECUTIVE LAB
MAGNO NAILS OÜ
RUT RATTAN & WARE OÜ
STUDIO STUDIO DISAINIBÜROO OÜ
MATEK WEAR - WLW OÜ / UUR OÜ
4
EWTA
SIIMUSÕÕ OÜ
ART CHERDAK
DECORETER OÜ
KEELEKESKUS SAME
SIRIUS CONSULTING OÜ
SPECIALIST VC
LARISSA TALVITIE CERAMICS
EDGE4EST PHOTOGRAPHY
MEDIESPUSS.EE
MUSTJAKAMI TAMKIVIMÄGRID OÜ
DANGE REPUBLIC TANTSUKOOL
3
PINK OÜ
ETAARIKOOL
EASTWOOD
MAGE STUDIO
MEOW STUDIO
PEEL & BELLE OÜ
SIRKEL FABRICS PÜ
PIN ARHITEKTID OÜ
SVITER
BSA CONSULTING OÜ
COLGIRI PHOTOSTUDIO
KAMP ARHITEKTID OÜ
RECNET PURGLA STUDIO OÜ
LÕSAN / AIRO PROJEKT / NOI
BLISSPLA PÜ OÜ / YOGA / EGHOMNE
2
LOVEPAINT
THE REWEAR COMPANY
PIN ARHITEKTID OÜ
NEW VINTAGE BY KIDS
DIZZIE
WESSE
GRAIN STUDIO
PILLPALJE
TAGS STUDIO
NOIR ART STUDIO
MAGE STUDIO
MÖÖBLIMUSEE.EE
LUMOS PHOTO STUDIO
DIARY BRIDE SHOWROOM
VESTORIANT
PRELOVED LASTEKUIVELUKAS
BALANDIN / RUPI STUDIO
MEHART TATTOO & PIERCING
TALLINNA POLÜTEHNIKUM
HIGH TIMES CREATIVE STUDIO
TARTU* JA KULTUURIDU MÕIS
ALEXEI GRATSIA STUDIO
MR ILLUMINATION BALTIC OÜ
SAUGAGE OÜ / VINKAJEE / ALEERSEE
SMOSKELYGUIDE OÜ
1

LENDHOTEL | LAM ARCHITEKTUR ZT GMBH GRAZ | AUSTRIA



1.0 LED

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter

IP20 0-90°|355° M-39° L70|55K

	EUR	CODE
	175,00	
	175,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	415	>90	3
3000K	430	>90	5
1800-3000K	350	>90	9


black ring LED


PAR16



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter

IP20 0-90°|355°

	EUR	CODE
	109,00	
	109,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905





white fixtures with white adapter
other fixtures with black adapter

77

215 | 221 | 223



2.0

LED COB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PC lens and reflector
1-phase Global® track adapter

IP20 310° M-32° L70|55K

	EUR	CODE
	195,00	
	195,00	
	195,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x355	>90	3
3000K	2x385	>90	5

OPTIONAL

honeycomb louver

	EUR	CODE
	14,50	



4.0

LED COB 20W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PC lens and reflector
1-phase Global® track adapter

IP20 310° M-32° L70|55K

	EUR	CODE
	255,00	
	255,00	
	255,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	4x365	>90	3
3000K	4x380	>90	5

OPTIONAL

honeycomb louver

	EUR	CODE
	14,50	



2.0 OPAL

LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PMMA cover
1-phase Global® track adapter

IP20 310° L80|60K

	EUR	CODE
	195,00	
	195,00	
	195,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	270	>90	3
3000K	280	>90	5



4.0 OPAL

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PMMA cover
1-phase Global® track adapter

IP20 310° L80|60K

	EUR	CODE
	255,00	
	255,00	
	255,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	685	>90	3
3000K	710	>90	5

back



URBAN SPACES | STUDIO KOMO STUTTGART | GERMANY

1-*Phase*

279

465

623

715 | 731



1.0

QT14 max. 5W | G9
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass
1-phase Global® track adapter

IP20

	EUR	CODE
	155,00	

OPTIONAL

QT14 3.5W | G9 | phase-cut dim clear

	EUR	CODE
2700K | 340lm	18,00	
3000K | 350lm	18,00	

back



243 | 247
505 | 507
531 | 535
611 | 613



HEXO MINI 3.0 | 5.0

PAR11 max. 12W | GU10
220-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter

IP20

3.0

300mm	EUR	CODE
	138,00	
	138,00	
	138,00	

5.0

500mm	EUR	CODE
	158,00	
	158,00	
	158,00	

OPTIONAL

PAR11 4.3W | GU10 | phase-cut dim

	EUR	CODE
2700K | 225lm	14,50	
3000K | 235lm	14,50	



RAY MINI 3.0 | 5.0

PAR11 max. 12W | GU10
220-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter
white and LS – white cable/adapter
others – black cable/adapter

IP20

3.0

300mm	EUR	CODE
	131,00	
	131,00	
	131,00	
	131,00	

5.0

500mm	EUR	CODE
	151,00	
	151,00	
	151,00	
	151,00	

OPTIONAL

PAR11 4.3W | GU10 | phase-cut dim

	EUR	CODE
2700K | 240lm	14,50	
2700K | 225lm	14,50	
3000K | 255lm	14,50	
3000K | 235lm	14,50	



OFFICE THE HOUSE | SPACELAB ARKITEKTER COPENHAGEN | DENMARK



HEXO 3.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter

IP20

3.0

300mm	EUR	CODE
	121,00	
	121,00	
	121,00	
	119,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 440lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905



RAY 2.0 | 3.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter
white fixtures – white cable/adapter
others – black cable/adapter

IP20

2.0

200mm	EUR	CODE
	102,00	
	109,00	
	109,00	
	109,00	
	109,00	
	102,00	

3.0

300mm	EUR	CODE
	108,00	
	115,00	
	115,00	
	115,00	
	115,00	
	108,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905

245 | 251
533 | 537
615
759
805



PRIVATE RESIDENCE | BRITTE MARCUS BELGIUM

517 | 539

599



1.1

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter
white fixtures – white cable/adapter
others – black cable/adapter

IP20

	EUR	CODE
	154,00	
	154,00	
	154,00	
	154,00	
	154,00	
	154,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905



1.2

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter
white fixtures – white cable/adapter
others – black cable/adapter

IP20

	EUR	CODE
	220,00	
	220,00	
	220,00	
	220,00	
	220,00	
	220,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905



1.3

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter
white fixtures – white cable/adapter
others – black cable/adapter

IP20

	EUR	CODE
	155,00	
	155,00	
	155,00	
	155,00	
	155,00	
	155,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905













back



SHOWROOM GRANDO KEUKENS BELGIUM



1-*Phase*





1.4

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter
white fixtures – white cable/adapter
others – black cable/adapter

IP20

	EUR	CODE
	162,00	
	162,00	
	162,00	
	162,00	
	162,00	
	162,00	

1.5

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter
white fixtures – white cable/adapter
others – black cable/adapter

IP20

	EUR	CODE
	165,00	
	165,00	
	165,00	
	165,00	
	165,00	
	165,00	

1.6

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter
white fixtures – white cable/adapter
others – black cable/adapter

IP20

	EUR	CODE
	166,00	
	166,00	
	166,00	
	166,00	
	166,00	
	166,00	

optional inner cover on page 910













OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905





1.0

G95 max. 12W | E27
220-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter
white fixtures – white cable/adapter
others – black cable/adapter

IP20

	EUR	CODE
	98,00	
	98,00	
	98,00	
	98,00	

OPTIONAL

G95 10W | E27 | phase-cut dim | opal

	EUR	CODE
2700K | 1060lm	33,00	



SURFACE | SUSPENDED EXAMPLES

configuration as seen from top view

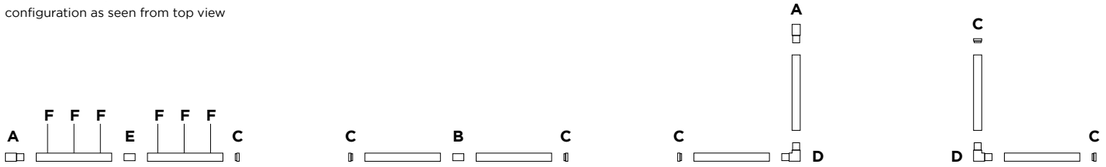



TRACK PROFILE

surface | suspended | DALI
220-240V | 16A

DALI FELV

		EUR	CODE
	1m	49,00	
	1m	49,00	
	2m	97,00	
	2m	97,00	
	3m	147,00	
	3m	147,00	



F | SUSPENSION SET

complete suspension set
incl. ceiling fixation bracket

		EUR	CODE
	max. 1.5m	29,00	
	max. 1.5m	29,00	
	max. 3m	30,00	
	max. 3m	30,00	

for 1.0m - 2pcs needed
for 2.0m - 3pcs needed
for 3.0m - 4pcs needed



A | END FEED 1.0

including cable gasket
220-240V | max. 7 x 1.5-2.5mm² | 16A

	EUR	CODE
	23,00	
	23,00	



A | END FEED 2.0

including cable gasket
220-240V | max. 7 x 1.5-2.5mm² | 16A

	EUR	CODE
	23,00	
	23,00	



B | MIDDLE FEED

straight
220-240V | max. 7 x 1.5-2.5mm² | 16A

	EUR	CODE
	51,00	
	51,00	



C | END CAP LEFT/RIGHT

	EUR	CODE
	3,00	
	3,00	



D | L-FEED 1.0

220-240V | max. 7 x 1.5-2.5mm² | 16A

	EUR	CODE
	48,00	
	48,00	



D | L-FEED 2.0

220-240V | max. 7 x 1.5-2.5mm² | 16A

	EUR	CODE
	48,00	
	48,00	



E | STRAIGHT CONNECTOR

straight | 220-240V | 16A

	EUR	CODE
	16,00	
	16,00	



TRACK COVER

		EUR	CODE
	1m	29,00	
	1m	29,00	

more 3-phase track accessories on page 919





1.0

LED COB 12W
220-240VAC | 50-60Hz
aluminium
3-phase track adapter

IP20 0-90°|360° M-30° L80|50K

non-dim

	EUR	CODE
	138,00	
	138,00	

DALI-2

	EUR	CODE
	175,00	
	175,00	

LIGHT COLOUR	LUMEN|CRI	CODE
2700K	1070|>90	3
3000K	1110|>90	5

OPTIONAL

honeycomb louver

	EUR	CODE
	14,50	



2.0

LED COB 14W | ≤115lm/W
220-240VAC | 50-60Hz
aluminium
3-phase track adapter

IP20 0-90°|360° M-27° L80|50K

non-dim

	EUR	CODE
	158,00	
	158,00	

DALI-2

	EUR	CODE
	195,00	
	195,00	

LIGHT COLOUR	LUMEN|CRI	CODE
2700K	1565|>90	3
3000K	1600|>90	5

OPTIONAL

honeycomb louver

	EUR	CODE
	16,00	



3.0

LED COB 18W | ≤120lm/W
220-240VAC | 50-60Hz
aluminium
3-phase track adapter

IP20 0-90°|360° M-27° L80|50K

non-dim

	EUR	CODE
	175,00	
	175,00	

DALI-2

	EUR	CODE
	205,00	
	205,00	

LIGHT COLOUR	LUMEN|CRI	CODE
2700K	2110|>90	3
3000K	2175|>90	5

OPTIONAL

honeycomb louver

	EUR	CODE
	17,50	

≤120lm/W

MORE VERSIONS ONLINE

back



AOK OFFICE | DESIGNFUNKTION BERLIN | GERMANY







1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
3-phase track adapter

IP20 0-90°|355°

	EUR	CODE
	109,00	
	109,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905



2.0 LED

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium
3-phase track adapter

IP20 0-90°|355° M-32° L70|55K

	EUR	CODE
	214,00	
	214,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	925	>90	3
3000K	960	>90	5
1800K-3000K	645	>90	9



3.0 LED

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz
aluminium
3-phase track adapter

IP20 0-90°|355° M-27° L70|55K

	EUR	CODE
	228,00	
	228,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1400	>90	3
3000K	1480	>90	5



243 | 247
505 | 507
531 | 535
611 | 613



HEXO MINI 3.0 | 5.0

PAR11 max. 12W | GU10
220-240VAC | 50-60Hz
aluminium
3-phase track adapter

IP20

3.0

300mm	EUR	CODE
	138,00	
	138,00	
	138,00	

5.0

500mm	EUR	CODE
	158,00	
	158,00	
	158,00	

OPTIONAL

PAR11 4.3W | GU10 | phase-cut dim

	EUR	CODE
2700K | 225lm	14,50	
3000K | 235lm	14,50	



RAY MINI 3.0 | 5.0

PAR11 max. 12W | GU10
220-240VAC | 50-60Hz
aluminium
3-phase track adapter
W and LS – white cable/adapter
others – black cable/adapter

IP20

3.0

300mm	EUR	CODE
	131,00	
	131,00	
	131,00	
	131,00	

5.0

500mm	EUR	CODE
	151,00	
	151,00	
	151,00	
	151,00	

OPTIONAL

PAR11 4.3W | GU10 | phase-cut dim

	EUR	CODE
2700K | 240lm	14,50	
2700K | 225lm	14,50	
3000K | 255lm	14,50	
3000K | 235lm	14,50	



PRIVATE RESIDENCE | INTERNI 21.11 ITALY



HEXO 3.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
3-phase track adapter

IP20

3.0

300mm	EUR	CODE
	121,00	
	121,00	
	121,00	
	119,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 440lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905



RAY 2.0 | 3.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
3-phase track adapter
W fixtures – white cable/adapter
others – black cable/adapter

IP20

2.0

200mm	EUR	CODE
	102,00	
	109,00	
	109,00	
	109,00	
	109,00	
	102,00	

3.0

300mm	EUR	CODE
	108,00	
	115,00	
	115,00	
	115,00	
	115,00	
	108,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905

245 | 251
533 | 537
615
759
805



DIN SONNBERG IM MÜHLKREIS | AUSTRIA

DESIGN AWARD 2022 · GOOD DESIGN · reddot winner 2021

293

499



1.0 MICROPRISMATIC

LED PCB 35W | DALI-2
220-240VAC | 50-60Hz
aluminium
microprismatic PMMA cover
3-phase track adapter incl. driver

IP20 L80|60K UGR ≤ 19

	EUR	CODE
	745,00	
	745,00	

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	3660	>90	5
4000K	3660	>90	7

UGR ≤ 19
65°≤ 3000cd
microprismatic



1.0 OPAL

LED PCB 35W | DALI-2
220-240VAC | 50-60Hz
aluminium | opal PMMA cover
3-phase track adapter incl. driver

IP20 L80|60K

	EUR	CODE
	725,00	
	725,00	

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	3700	>90	5
4000K	3700	>90	7

back

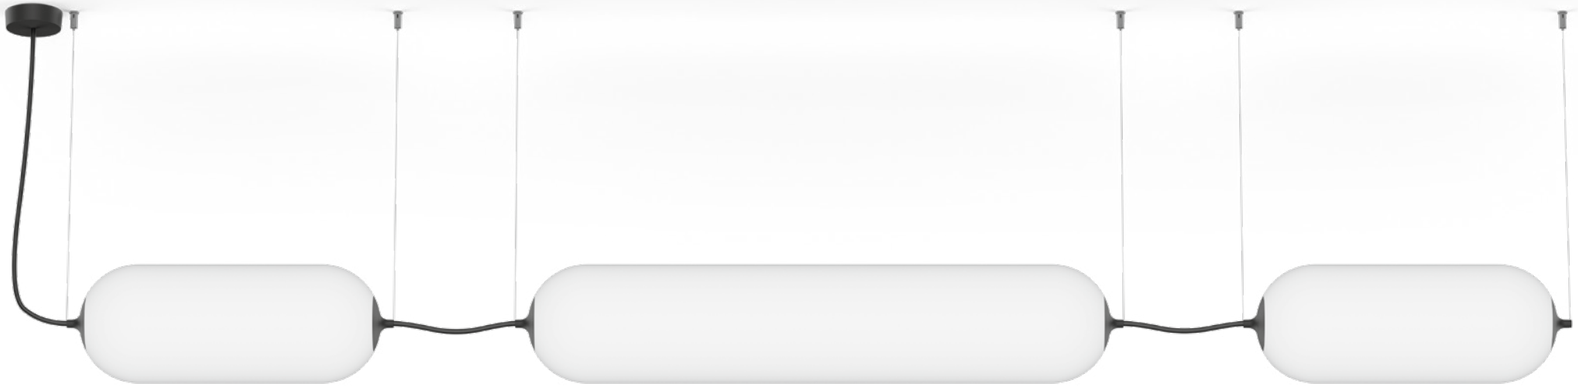







1.0

LED PCB 16W | DALI-2 DT8
220-240VAC | 50-60Hz
aluminium | opal polyethylene
incl. suspension set
default light colour 3500K

IP20 L80|100K

2700K-5000K| CRI >90 | 1250lm

	EUR	CODE
	695,00	

2.0

LED PCB 22W | DALI-2 DT8
220-240VAC | 50-60Hz
aluminium | opal polyethylene
incl. suspension set
default light colour 3500K

IP20 L80|100K

2700K-5000K| CRI >90 | 2500lm

	EUR	CODE
	935,00	

3.0

LED PCB 35W | DALI-2 DT8
220-240VAC | 50-60Hz
aluminium | opal polyethylene
incl. suspension set
default light colour 3500K

IP20 L80|100K

2700K-5000K| CRI >90 | 4500lm

	EUR	CODE
	1495,00	

B | BASE

W/H ø97x28
polypropylene

	EUR	CODE
	45,00	

CONNECTOR

included in **1.0 | 2.0 | 3.0**

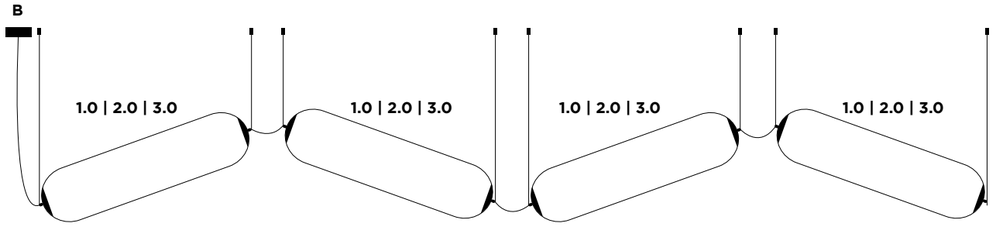

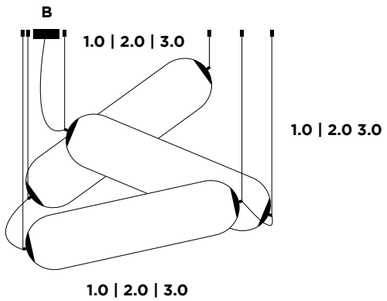



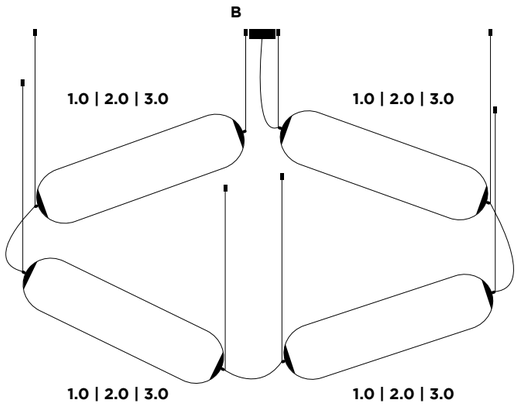

1.0 | 2.0 | 3.0 Luminaire
B Base

KEEP IN MIND WHEN PLANNING YOUR SYSTEM

Please be aware that the maximum length of the QUBBY System cannot be longer then 80m or max. 40 luminaires.



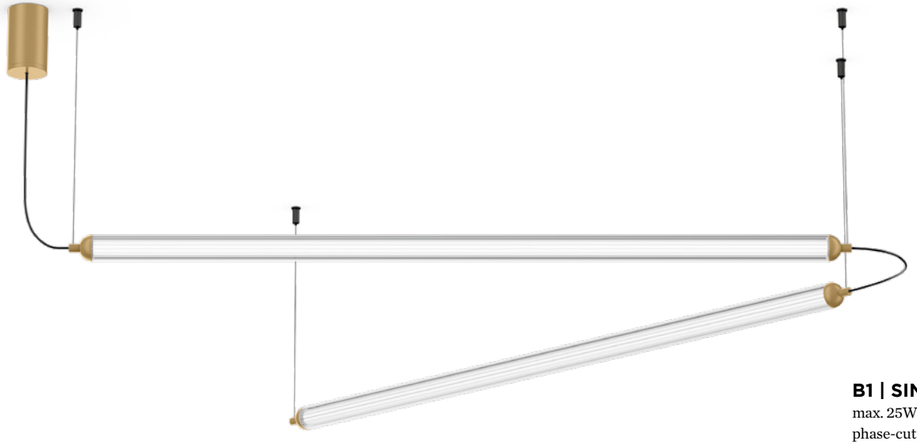







1.0

LED strip 8W
aluminium | ribbed glass

IP20 L80|50K

	EUR	CODE
	280,00	
	280,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1035	>90	3
3000K	1065	>90	5

2.0

LED strip 12W
aluminium | ribbed glass

IP20 L80|50K

	EUR	CODE
	340,00	
	340,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1555	>90	3
3000K	1600	>90	5

3.0

LED strip 15W
aluminium | ribbed glass

IP20 L80|50K

	EUR	CODE
	410,00	
	410,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2070	>90	3
3000K	2130	>90	5

B1 | SINGLE/MULTI BASE

max. 25W | const. volt. | 24V
phase-cut dim | W/H ø62x102
polycarbonate

	EUR	CODE
	55,00	
	55,00	

B2 | MULTI BASE

max. 50W | const. volt. | 24V
phase-cut dim | W/H ø200x38
polycarbonate

	EUR	CODE
	75,00	
	75,00	

C | CABLE CONNECTOR

cable from one luminaire to another
incl. plugs

		EUR	CODE
	0.3m	14,50	
	0.6m	19,00	
	0.9m	23,00	
	1.2m	27,00	

D | FIX CONNECTOR

electrical | mechanical | straight
central suspension

	EUR	CODE
	24,00	

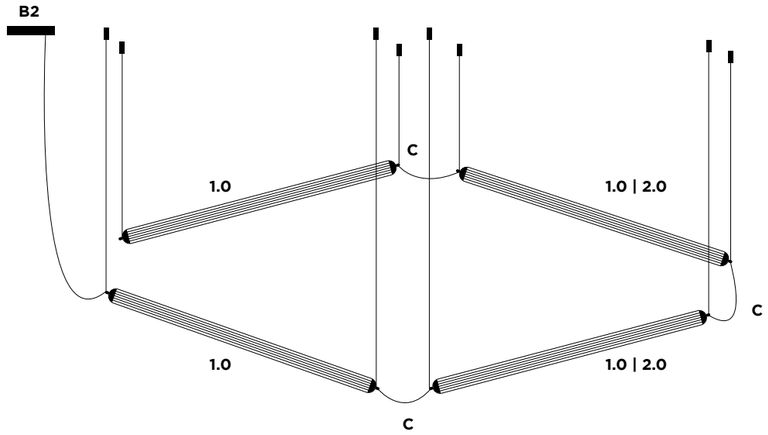

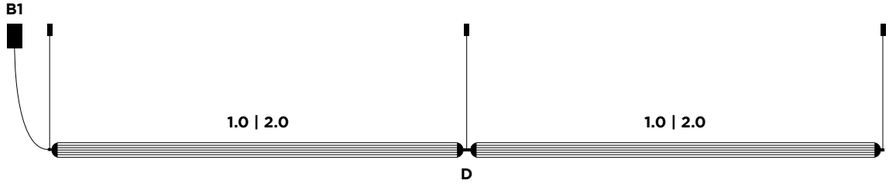

1.0 | 2.0 | 3.0	Luminaire
B1	Single/Multi Base
B2	Multi Base
C	Cable connector
D	Fix connector

KEEP IN MIND WHEN PLANNING YOUR SYSTEM

Please be aware that the maximum wattage of the FLYRA System cannot be higher than 25W for B1 and 50W for B2 per System.

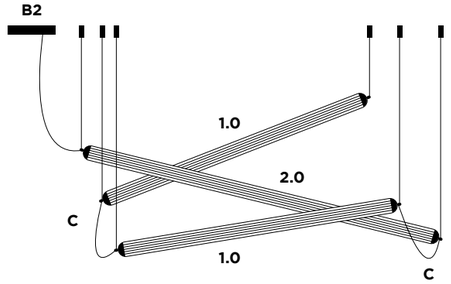

back







1.0

LED PCB | dimmable
220-240VAC | 50-60Hz
aluminium | opal PMMA cover

IP20 L80|50K

phase-cut dim | 20W
3000K | CRI >90 | 1090lm

	EUR	CODE
	362,00	
	362,00	

DALI-2 | 22W | incl. driver
3000K | CRI >90 | 1090lm

	EUR	CODE
	412,00	
	412,00	

B | CONNECTOR POINT

phase-cut dim up to max. 4 fixtures
DALI up to max. 2 fixtures

	EUR	CODE
	52,00	
	52,00	

C | STEEL SUSPENSION CABLE

	EUR	CODE
2.0m	13,00	

D1 | POWER FEEDER

for phase-cut dim | incl. steel suspension cable 2.0m | max. 10 luminaires per power feeder

	EUR	CODE
	62,00	
	62,00	

D2 | POWER FEEDER

for DALI | incl. steel suspension cable 2.0m | max. 10 luminaires per power feeder

	EUR	CODE
	78,00	
	78,00	

SURFACE EXAMPLES

configuration as seen from top view | minimum angle 45°

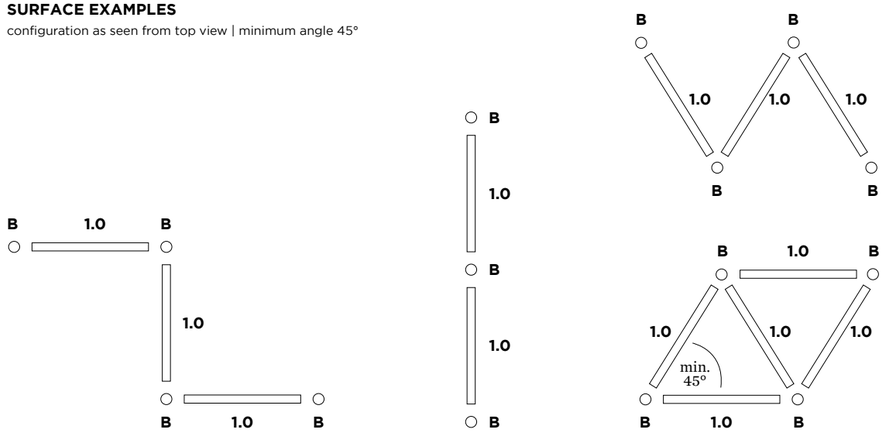

SUSPENDED EXAMPLES

configuration as seen from top view | minimum angle 45°
can be used up or down (direct or indirect)

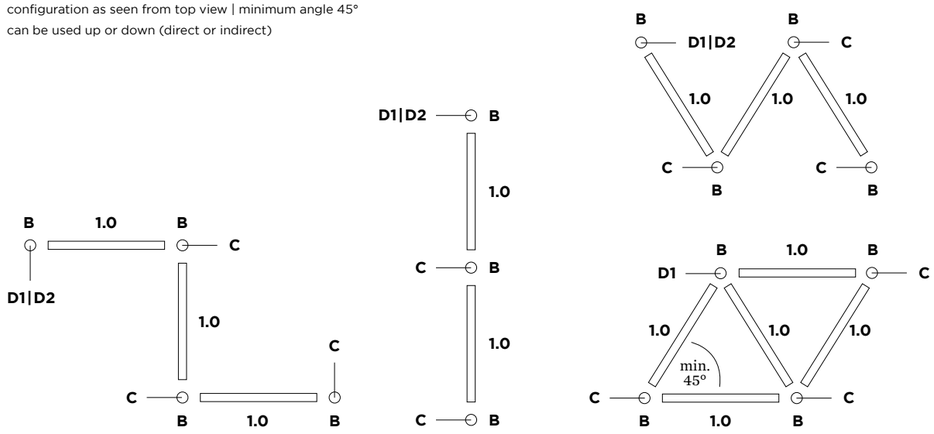

OFFICE KR PROPERTIES | 2A ARCHITECURAL GROUP

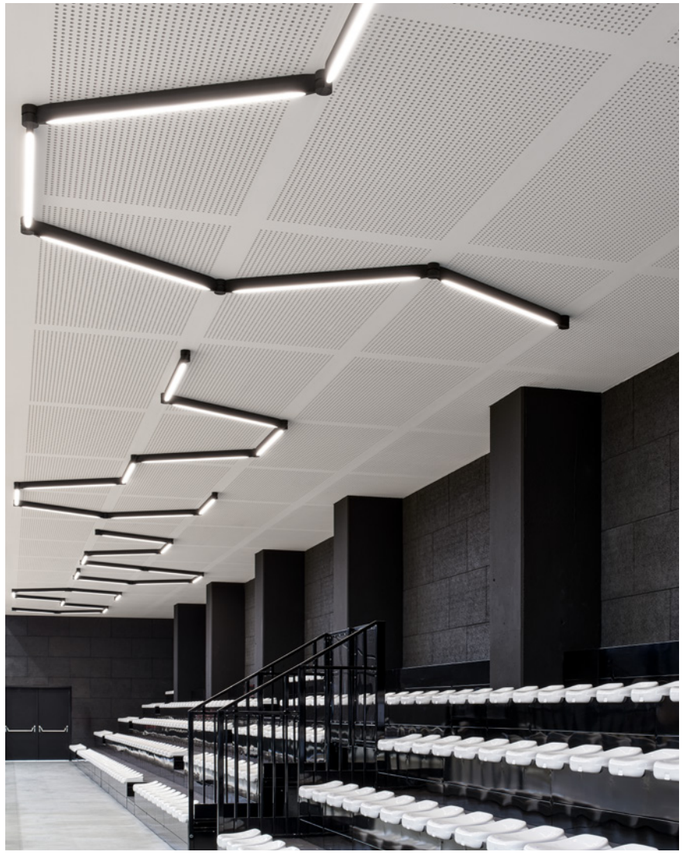

MATE SPORT HALL | IBL LIGHT & DESIGN THIENE | ITALY



PRIVATE RESIDENCE AUSTRIA

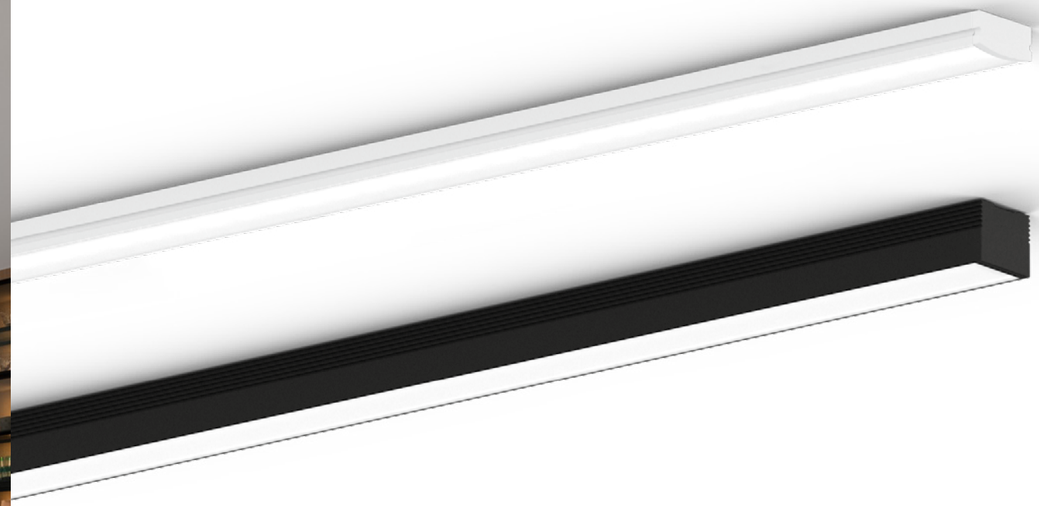

Ceiling surface

1.0 PROFILE

aluminium | opal diffuser included
end caps and mounting clips



		EUR	CODE
	2m	29,00	
	2m	29,00	
	3m	46,00	
	3m	46,00	

2.0 PROFILE

aluminium | opal diffuser included
end caps and mounting clips



		EUR	CODE
	2m	44,00	
	2m	44,00	
	3m	62,00	
	3m	62,00	

ALWAYS USE

LED COB strip 24V | IP20
10W/m | 800lm/m

	EUR	CODE
20W | 2m	38,50	
30W | 3m	57,00	
50W | 5m	96,00	

LED COB strip 24V | IP20
15W/m | 1250lm/m

	EUR	CODE
30W | 2m	57,00	
45W | 3m	77,00	
75W | 5m	135,00	

LIGHT COLOUR	CRI	CODE
2700K	>90	3
3000K	>90	5

driver | 24V

	EUR	CODE
35W	42,00	
100W	73,80	
25W dim	46,00	
50W dim	68,00	

specs on page 901

ALWAYS USE

LED COB strip 24V | IP20
10W/m | 800lm/m

	EUR	CODE
20W | 2m	38,50	
30W | 3m	57,00	
50W | 5m	96,00	

LED COB strip 24V | IP20
15W/m | 1250lm/m

	EUR	CODE
30W | 2m	57,00	
45W | 3m	77,00	
75W | 5m	135,00	

LIGHT COLOUR	CRI	CODE
2700K	>90	3
3000K	>90	5

driver | 24V

	EUR	CODE
35W	42,00	
100W	73,80	
25W dim	46,00	
50W dim	68,00	

specs on page 901



for net output of LED strip on profiles, check

OPTIONAL

Black diffuser | only for 1.0

	EUR	CODE
2m	14,00	
3m	21,00	

Double side tape for profile fixation

	EUR	CODE
3m	15,50	

more accessories on page 916



PRIVATE RESIDENCE SPAIN

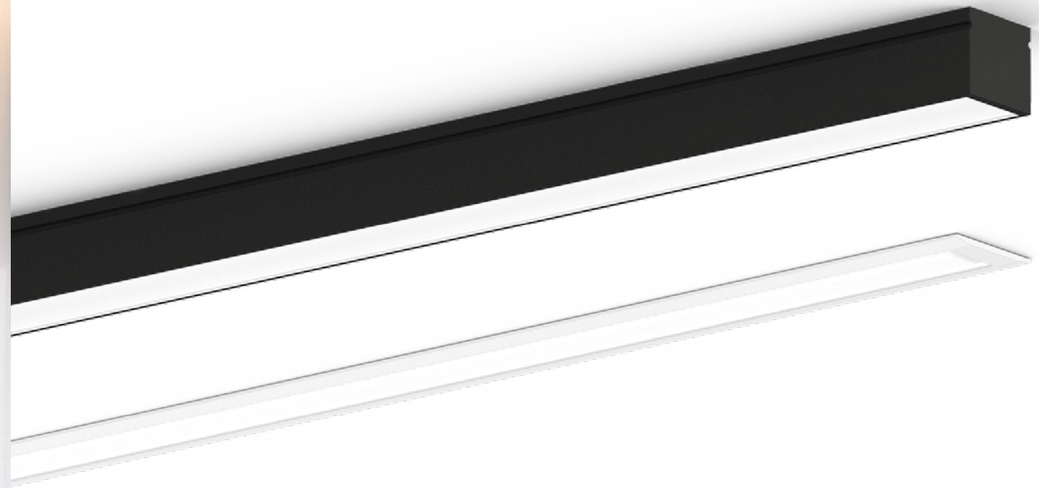

Ceiling surface / recessed

3.0 PROFILE

aluminium | opal diffuser included
end caps and mounting clips



		EUR	CODE
	2m	46,00	
	2m	46,00	
	3m	67,00	
	3m	67,00	

4.0 PROFILE

aluminium | opal diffuser included
end caps and mounting clips



		EUR	CODE
	2m	58,00	
	2m	58,00	
	3m	76,00	
	3m	76,00	

ALWAYS USE

LED COB strip 24V | IP20
10W/m | 800lm/m

	EUR	CODE
20W | 2m	38,50	
30W | 3m	57,00	
50W | 5m	96,00	

LED COB strip 24V | IP20
15W/m | 1250lm/m

	EUR	CODE
30W | 2m	57,00	
45W | 3m	77,00	
75W | 5m	135,00	

LIGHT COLOUR	CRI	CODE
2700K	>90	3
3000K	>90	5

driver | 24V

	EUR	CODE
35W	42,00	
100W	73,80	
25W dim	46,00	
50W dim	68,00	

specs on page 901

ALWAYS USE

LED COB strip 24V | IP20
10W/m | 800lm/m

	EUR	CODE
20W | 2m	38,50	
30W | 3m	57,00	
50W | 5m	96,00	

LED COB strip 24V | IP20
15W/m | 1250lm/m

	EUR	CODE
30W | 2m	57,00	
45W | 3m	77,00	
75W | 5m	135,00	

LIGHT COLOUR	CRI	CODE
2700K	>90	3
3000K	>90	5

driver | 24V

	EUR	CODE
35W	42,00	
100W	73,80	
25W dim	46,00	
50W dim	68,00	

specs on page 901



for net output of LED strip on profiles, check

OPTIONAL

Black diffuser | only for 3.0

	EUR	CODE
2m	17,00	
3m	23,00	

Double side tape for profile fixation

	EUR	CODE
3m	15,50	

more accessories on page 916

Ceiling suspended

SINGLE LUMINAIRES


415


417


421


423


427

433


437


441


445


449


451


453


457


459


461

SINGLE SUSPEN-SIONS

463

465


467


471


475


477


479


489


495


499

CHOOSE YOUR BASE

LV more infos
on p. 500

503

505

507

509

511


517

521


523


525

CHOOSE YOUR BASE

HV more infos
on p. 528

531


533

535

537

539


547

549

557

561

563

back





1.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-30° L80|50K

2700K | CRI >90 | 3x240lm

	EUR	CODE
	510,00	
	510,00	
	485,00	



2.1

LED COB 18W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-30° L80|50K

2700K | CRI >90 | 6x240lm

	EUR	CODE
	825,00	
	825,00	
	790,00	



3.2

LED COB 18W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-30°L80|50K

2700K | CRI >90 | 6x240lm

	EUR	CODE
	890,00	
	890,00	
	845,00	



3.2.1

LED COB 26W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-30° L80|50K

2700K | CRI >90 | 9x240lm

	EUR	CODE
	1240,00	
	1240,00	
	1150,00	



PRIVATE RESIDENCE | RARDO ARCHITECTS SPAIN

DESIGN AWARD 2024

reddot winner 2023

Ceiling suspended

261 | 269 | 273

351

593 | 595



1.0

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-30° L80|50K

	EUR	CODE
	495,00	
	495,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	4x170	>90	3
3000K	4x180	>90	5



2.0

LED COB 16W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-30° L80|50K

	EUR	CODE
	665,00	
	665,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	6x180	>90	3
3000K	6x190	>90	5



3.0

LED COB 17W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-30° L80|50K

	EUR	CODE
	825,00	
	825,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	8x215	>90	3
3000K	8x225	>90	5

back



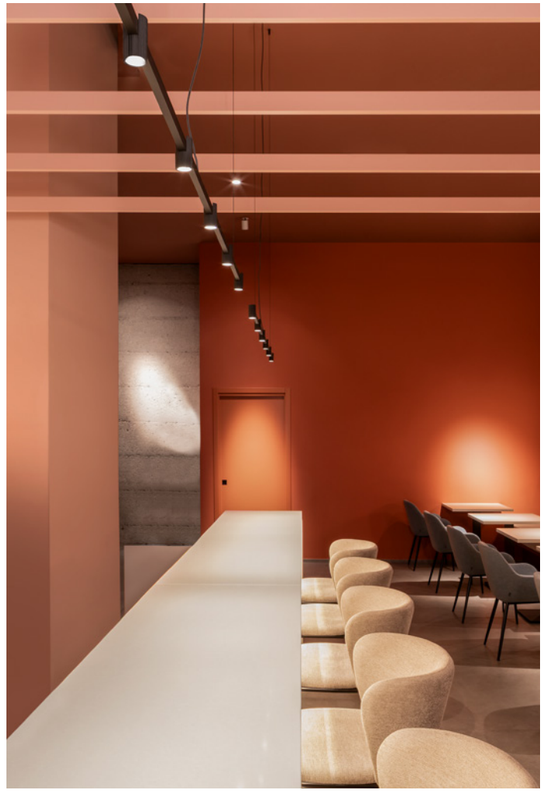

RESTAURANT L'APERICENA TIME | ARCH. LEONARDO PORCELLI – STILEMI RIVAROLO CANAVESE | ITALY



PRIVATE RESIDENCE | SOFIE CHRISTIAENS BELGIUM

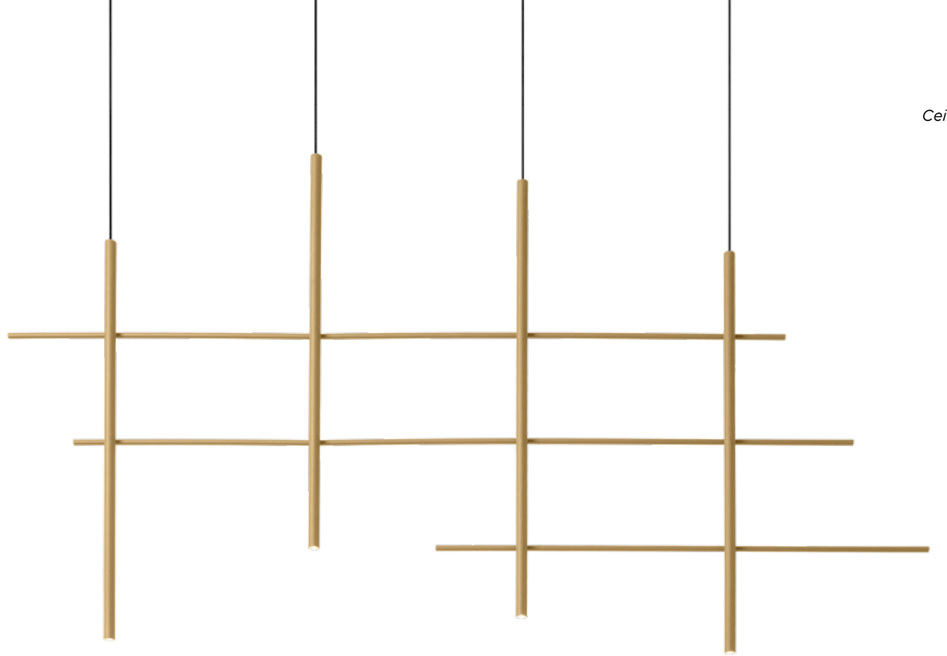

Ceiling suspended



2.0

LED PCB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 W-85° L80|50K

2700K | CRI >90 | 2x235lm

	EUR	CODE
	465,00	
	465,00	
	465,00	



4.0

LED PCB 28W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 W-85° L80|50K

2700K | CRI >90 | 4x235lm

	EUR	CODE
	890,00	
	890,00	
	890,00	

back





1.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | ribbed glass

IP20 L80|100K

2700K | CRI >90 | 1040lm

	EUR	CODE
	495,00	
	495,00	

back



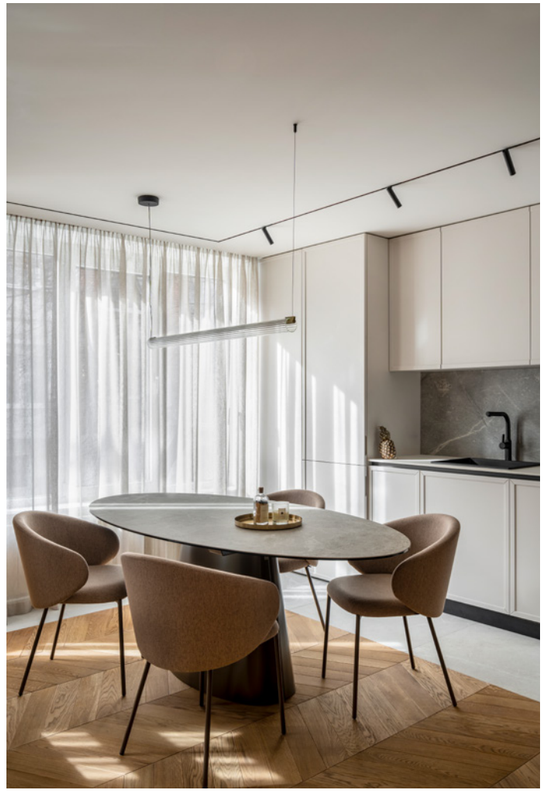

PRIVATE RESIDENCE | EN-TRE STUDIO BULGARIA



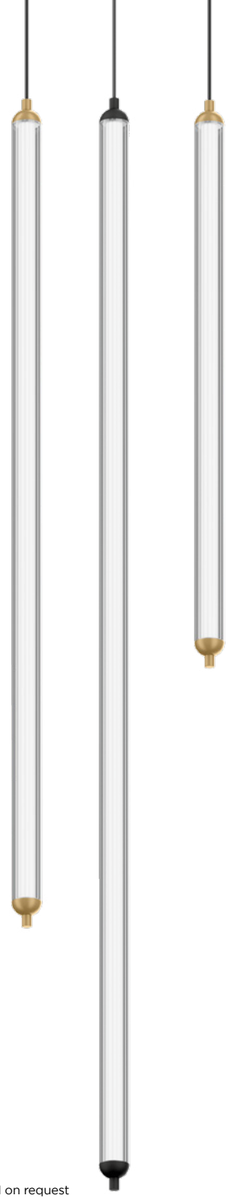

DALI on request

Ceiling suspended

401



1.1 VERTICAL

LED strip 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | ribbed glass

IP20 L80|50K

	EUR	CODE
	325,00	
	325,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	710	>90	3
3000K	730	>90	5



1.2 VERTICAL

LED strip 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | ribbed glass

IP20 L80|50K

	EUR	CODE
	395,00	
	395,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1065	>90	3
3000K	1095	>90	5



1.3 VERTICAL

LED strip 16W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | ribbed glass

IP20 L80|50K

	EUR	CODE
	465,00	
	465,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1420	>90	3
3000K	1460	>90	5

back



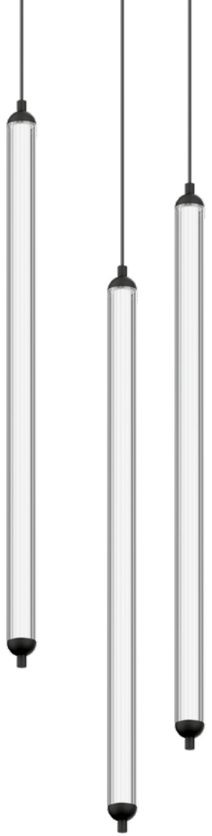

Ceiling suspended

401



3.1 VERTICAL

LED strip 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | ribbed glass

IP20 L80|50K

	EUR	CODE
	1140,00	
	1140,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	965	>90	3
3000K	995	>90	5



3.3 VERTICAL

LED strip 18W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | ribbed glass

IP20 L80|50K

	EUR	CODE
	1350,00	
	1350,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1450	>90	3
3000K	1490	>90	5



6.3 VERTICAL

LED strip 35W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | ribbed glass

IP20 L80|50K

	EUR	CODE
	2370,00	
	2370,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2900	>90	3
3000K	2985	>90	5





Ceiling suspended

401



1.1 HORIZONTAL

LED strip 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | ribbed glass

IP20 L80|50K

	EUR	CODE
	335,00	
	335,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	710	>90	3
3000K	730	>90	5



1.2 HORIZONTAL

LED strip 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | ribbed glass

IP20 L80|50K

	EUR	CODE
	395,00	
	395,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1065	>90	3
3000K	1095	>90	5



1.3 HORIZONTAL

LED strip 18W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | ribbed glass

IP20 L80|50K

	EUR	CODE
	465,00	
	465,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1420	>90	3
3000K	1460	>90	5

DALI on request

back



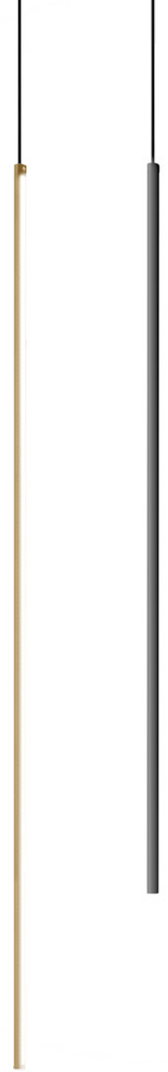

263

673 | 679

727



1.0

LED PCB 5W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser

IP20 L80|50K

		EUR	CODE
	2.5m	250,00	
	2.5m	250,00	
	10m	280,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	450	>90	3
3000K	485	>90	5



2.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser

IP20 L80|50K

		EUR	CODE
	2.5m	260,00	
	2.5m	260,00	
	10m	290,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	675	>90	3
3000K	730	>90	5



3.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser

IP20 L80|50K

		EUR	CODE
	2.5m	295,00	
	2.5m	295,00	
	10m	325,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	900	>90	3
3000K	975	>90	5

OPTIONAL

cover plate adapter for concrete housing

	EUR	CODE
	12,50	





1.0

LED PCB 18W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | polycarbonate
suspension textile belt
incl. 2 ceiling brackets

IP20 W-67° L80|100K

UGR ≤ 19
65°≤ 3000cd

3000K | CRI >90 | 1750lm

	EUR	CODE
	425,00	
	425,00	



2.0

LED PCB 27W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | polycarbonate
suspension textile belt
incl. 2 ceiling brackets

IP20 W-67° L80|100K

3000K | CRI >90 | 2700lm

	EUR	CODE
	545,00	
	545,00	

back





PRIVATE RESIDENCE | STUDIO BRASS THE NETHERLANDS



1.0

LED PCB 22W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 L80|50K

	EUR	CODE
	465,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1070	>90	3
3000K	1120	>90	5



2.0

LED PCB 26W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 L80|50K

	EUR	CODE
	495,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1280	>90	3
3000K	1340	>90	5





back





PRIVATE RESIDENCE | RICCARDO ROSSI SWITZERLAND



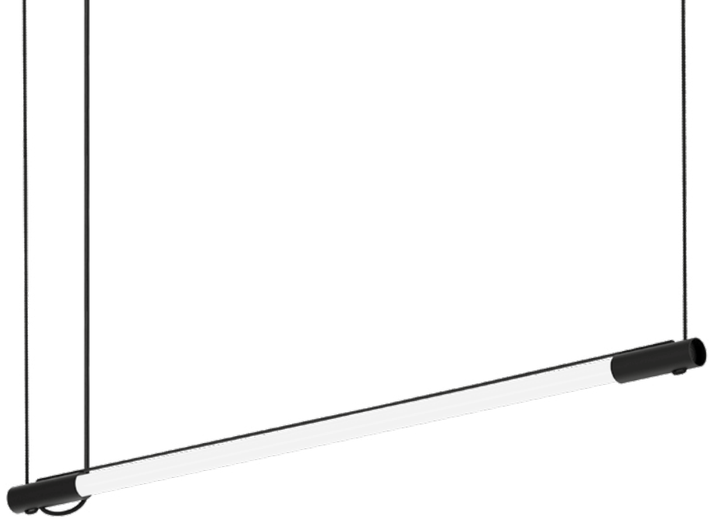

Ceiling suspended

643



2.1

LED TUBE 10W | non dim
220-240VAC | 50-60Hz
aluminium | black textile cable

IP20 L70|75K

3000K | CRI >80 | 1530lm

	EUR	CODE
	239,00	



3.1

LED TUBE 14W | non dim
220-240VAC | 50-60Hz
aluminium | black textile cable

IP20 L70|75K

3000K | CRI >80 | 2300lm

	EUR	CODE
	244,00	



4.1

LED TUBE 22W | non dim
220-240VAC | 50-60Hz
aluminium | black textile cable

IP20 L70|60K

	EUR	CODE
	248,00	

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	3560	>80	4
4000K	3950	>80	6



4.2

LED TUBE 23W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | black textile cable

IP20 L70|60K

	EUR	CODE
	307,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2780	>90	3
3000K	2940	>90	5

BENEDICTION | KKOL STUDIO SEOUL | SOUTH KOREA

ARCHITECT | PHILIPP WEINBERGER & STUDIO MARCH GUT

back





MOTTO PILATES | STUDIO WOLF OFFENBACH | GERMANY

▶ **DESIGN WITH LOVE**





1.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white luminaire – coloured shade

IP20 L80|100K

	EUR	CODE
	395,00	
	395,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	565	>90	3
3000K	580	>90	5



2.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white luminaire – coloured shade

IP20 L80|100K

	EUR	CODE
	495,00	
	495,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	565	>90	3
3000K	580	>90	5





1.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white luminaire – coloured shade

IP20 L80|100K

	EUR	CODE
	445,00	
	445,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	565	>90	3
3000K	580	>90	5



2.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white luminaire – coloured shade

IP20 L80|100K

	EUR	CODE
	545,00	
	545,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	565	>90	3
3000K	580	>90	5





Ceiling suspended







1.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | silicone cover
base in matching colour

IP20 L80|100K

	EUR	CODE
	298,00	
	298,00	
	298,00	
	298,00	
	298,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	755	>90	3
3000K	800	>90	5

2.0

LED PCB 15W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | silicone cover
base in matching colour

IP20 L80|100K

	EUR	CODE
	375,00	
	375,00	
	375,00	
	375,00	
	375,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1140	>90	3
3000K	1175	>90	5

3.0

LED PCB 19W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | silicone cover
base in matching colour

IP20 L80|100K

	EUR	CODE
	475,00	
	475,00	
	475,00	
	475,00	
	475,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1520	>90	3
3000K	1565	>90	5

white fixtures – white cable/silver steel wire | SG fixtures – SG cable/silver steel wire | others – black cable/steel wire
DALI on request

back





2.1

LED PCB 34W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | silicone cover
base in matching colour

IP20 L80|100K

	EUR	CODE
	650,00	
	650,00	
	650,00	
	650,00	
	650,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1940	>90	3
3000K	2000	>90	5



3.2

LED PCB 48W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | silicone cover
base in matching colour

IP20 L80|100K

	EUR	CODE
	815,00	
	815,00	
	815,00	
	815,00	
	815,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2720	>90	3
3000K	2800	>90	5



3.2.1

LED PCB 60W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | silicone cover
base in matching colour

IP20 L80|100K

	EUR	CODE
	1095,00	
	1095,00	
	1095,00	
	1095,00	
	1095,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	3490	>90	3
3000K	3595	>90	5

white fixtures – white cable/0.3m
connector/silver steel wire | SG fixtures
– SG cable/0.3m connector/steel wire
others – black cable/0.3m connector/
black steel wire
other connectors on page 921



357



1.0

LED PCB 29W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | glass
white fixture – white cable
black fixture – black cable

IP20 L80|100K

2700K| CRI >90 | 2000lm

	EUR	CODE
	1940,00	
	1940,00	



2.0

LED PCB 29W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | glass
white fixture – white cable
black fixture – black cable

IP20 L80|100K

2700K| CRI >90 | 2000lm

	EUR	CODE
	1960,00	
	1960,00	





back





Ceiling suspended

397







2700K – 5000K tuneable white

vertical/horizontal installation

1.0

LED PCB 16W | DALI-2 DT8
220-240VAC | 50-60Hz | incl. driver
aluminium | opal polyethylene
incl. suspension set
default light colour 3500K

IP20 L80|100K

2700K-5000K| CRI >90 | 1250lm

	EUR	CODE
	740,00	

2.0

LED PCB 22W | DALI-2 DT8
220-240VAC | 50-60Hz | incl. driver
aluminium | opal polyethylene
incl. suspension set
default light colour 3500K

IP20 L80|100K

2700K-5000K| CRI >90 | 2500lm

	EUR	CODE
	980,00	

3.0

LED PCB 35W | DALI-2 DT8
220-240VAC | 50-60Hz | incl. driver
aluminium | opal polyethylene
incl. suspension set
default light colour 3500K

IP20 L80|100K

2700K-5000K| CRI >90 | 4500lm

	EUR	CODE
	1540,00	



OFFICE NNE | OVER BYEN COPENHAGEN | DENMARK

Ceiling suspended





10.0

LED PCB 43W | DALI-2 | switch dim
220-240VAC | 50-60Hz | incl. driver
steel | opal LLDPE body | UL 94
HB std.glow wire test 630°

IP20 L80|60K

3000K | CRI >80 | 5330lm

	EUR	CODE
	1690,00	

4000K | CRI >80 | 5670lm

	EUR	CODE
	1690,00	

OPTIONAL

	EUR	CODE
suspension set 4m	98,00	

longer suspension on request

16.0

LED PCB 85W | DALI-2 | switch dim
220-240VAC | 50-60Hz | incl. driver
steel | opal LLDPE body | UL 94
HB std.glow wire test 630°

IP20 L80|60K

3000K | CRI >80 | 10700lm

	EUR	CODE
	2250,00	

4000K | CRI >80 | 11300lm

	EUR	CODE
	2250,00	

OPTIONAL

	EUR	CODE
suspension set 4m	98,00	

longer suspension on request





Ceiling suspended



1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | chrome plated | glass

IP20 M-38° L80|60K

2700K | CRI >90 | 405lm

	EUR	CODE
	282,00	
	282,00	

back



PASTRY SHOP WITTAMER BRUSSELS I BELGIUM

Ceiling suspended





1.0

QT14 max. 5W | G9
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass

IP20

	EUR	CODE
	195,00	

OPTIONAL

QT14 3.5W | G9 | phase-cut dim clear

	EUR	CODE
2700K | 340lm	18,00	
3000K | 350lm	18,00	



2.0

C35 max. 6W | E14
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass

IP20

	EUR	CODE
	275,00	

OPTIONAL

C35 5.5W | E14 | phase-cut dim | opal

	EUR	CODE
2700K | 450lm	10,50	



3.0

A60 max. 12W | E27
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass

IP20

	EUR	CODE
	355,00	

OPTIONAL

A60 9W | E27 | phase-cut dim | opal

	EUR	CODE
2700K | 800lm	14,50	



4.0

A65 max. 15W | E27
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass

IP20

	EUR	CODE
	545,00	

OPTIONAL

A65 14.6W | E27 | phase-cut dim | opal

	EUR	CODE
2700K | 1375lm	22,00	



HAUS BRINA | PRO URBAN AG DÜSSELDORF | GERMANY



Ceiling suspended






GB


NB


LB


BL

MORE VERSIONS ONLINE

1.0

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | one side reflective
composite panel

IP20

	EUR	CODE
	245,00	
	245,00	
	245,00	
	245,00	

OPTIONAL

A60 5.5W | E27 | phase-cut dim
gold mirror

	EUR	CODE
2700K | 405lm	32,00	

A60 5.5W | E27 | phase-cut dim
silver mirror

	EUR	CODE
2700K | 405lm	32,00	

2.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | one side reflective
composite panel

IP20

	EUR	CODE
	293,00	
	293,00	
	293,00	
	293,00	

OPTIONAL

G95 5W | E27 | phase-cut dim
gold mirror

	EUR	CODE
2200K | 370lm	35,00	
2700K | 410lm	35,00	

G95 5W | E27 | phase-cut dim
silver mirror

	EUR	CODE
2700K | 395lm	35,00	

3.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | one side reflective
composite panel

IP20

	EUR	CODE
	453,00	
	453,00	
	453,00	
	453,00	

OPTIONAL

G95 5W | E27 | phase-cut dim
gold mirror

	EUR	CODE
2200K | 370lm	35,00	
2700K | 410lm	35,00	

G95 5W | E27 | phase-cut dim
silver mirror

	EUR	CODE
2700K | 395lm	35,00	

283
625
721 | 733









MORE VERSIONS ONLINE

Ceiling suspended





2.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | PET felt material
noise absorbing material

IP20

	EUR	CODE
	293,00	
	293,00	
	293,00	
	293,00	

3.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | PET felt material
noise absorbing material

IP20

	EUR	CODE
	453,00	
	453,00	
	453,00	
	453,00	

OPTIONAL

G95 5W | E27 | phase-cut dim
gold mirror

	EUR	CODE
2200K | 370lm	35,00	
2700K | 410lm	35,00	

G95 5W | E27 | phase-cut dim
silver mirror

	EUR	CODE
2700K | 395lm	35,00	

G95 10W | E27 | phase-cut dim | opal

	EUR	CODE
2700K | 1060lm	33,00	

G95 4.5W | E27 | phase-cut dim | clear

	EUR	CODE
2700K | 375lm	33,00	

OPTIONAL

G95 5W | E27 | phase-cut dim
gold mirror

	EUR	CODE
2200K | 370lm	35,00	
2700K | 410lm	35,00	

G95 5W | E27 | phase-cut dim
silver mirror

	EUR	CODE
2700K | 395lm	35,00	

G95 10W | E27 | phase-cut dim | opal

	EUR	CODE
2700K | 1060lm	33,00	

G95 4.5W | E27 | phase-cut dim | clear

	EUR	CODE
2700K | 375lm	33,00	

285
629



COMBINE IT WITH OTHER OPTIONS





Ceiling suspended







1.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | PET felt material
noise absorbing material

IP20

	EUR	CODE
	365,00	
	365,00	
	365,00	
	365,00	

OPTIONAL

G95 10W | E27 | phase-cut dim | opal

	EUR	CODE
2700K | 1060lm	33,00	

2.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | PET felt material
noise absorbing material

IP20

	EUR	CODE
	555,00	
	555,00	
	555,00	
	555,00	

OPTIONAL

G95 10W | E27 | phase-cut dim | opal

	EUR	CODE
2700K | 1060lm	33,00	

3.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | PET felt material
noise absorbing material

IP20

	EUR	CODE
	425,00	
	425,00	
	425,00	
	425,00	

OPTIONAL

G95 10W | E27 | phase-cut dim | opal

	EUR	CODE
2700K | 1060lm	33,00	

MORE VERSIONS ONLINE





Ceiling suspended





1.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | PET felt material
noise absorbing material

IP20

	EUR	CODE
	435,00	
	435,00	
	435,00	
	435,00	

OPTIONAL

G95 10W | E27 | phase-cut dim | opal

	EUR	CODE
2700K | 1060lm	33,00	

2.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | PET felt material
noise absorbing material

IP20

	EUR	CODE
	695,00	
	695,00	
	695,00	
	695,00	

OPTIONAL

G95 10W | E27 | phase-cut dim | opal

	EUR	CODE
2700K | 1060lm	33,00	

3.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | PET felt material
noise absorbing material

IP20

	EUR	CODE
	450,00	
	450,00	
	450,00	
	450,00	

OPTIONAL

G95 10W | E27 | phase-cut dim | opal

	EUR	CODE
2700K | 1060lm	33,00	

MORE VERSIONS ONLINE



EOAK FLOORS SHOWROOM | VIGONARCHITECTS HANOI | VIETNAM



Ceiling suspended



04

6x A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium

IP20

	EUR	CODE
	1955,00	
	1955,00	

OPTIONAL

A60 3.8W | E27 | phase-cut dim
gold tinted

	EUR	CODE
2200K | 245lm	31,00	

A60 5.6W | E27 | phase-cut dim | clear

	EUR	CODE
2700K | 480lm	31,00	





Ceiling suspended

289

633



042

6x A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium

IP20

	EUR	CODE
	3590,00	
	3590,00	

OPTIONAL

A60 3.8W | E27 | phase-cut dim
gold tinted

	EUR	CODE
2200K | 245lm	31,00	

A60 5.6W | E27 | phase-cut dim | clear

	EUR	CODE
2700K | 480lm	31,00	

MERCURE CHANTILLY | PROJECT MANAGED BY ATYPIO HOTELS RESORTS WITH ABP ARCHITECTS VINEUIL-SAINT-FIRMIN | FRANCE

JULES WABBES

back



MERCURE CHANTILLY | PROJECT MANAGED BY ATYPIO HOTELS RESORTS WITH ABP ARCHITECTS VINEUIL-SAINT-FIRMIN | FRANCE



MERCURE CHANTILLY | PROJECT MANAGED BY ATYPIO HOTELS RESORTS WITH ABP ARCHITECTS | L'OBSERVATOIRE DE LA NUIT VINEUIL-SAINT-FIRMIN | FRANCE



Ceiling suspended

289

633



05

3x A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium

IP20

	EUR	CODE
	1695,00	
	1695,00	

OPTIONAL

A60 3.8W | E27 | phase-cut dim
gold tinted

	EUR	CODE
2200K | 245lm	31,00	

A60 5.6W | E27 | phase-cut dim | clear

	EUR	CODE
2700K | 480lm	31,00	

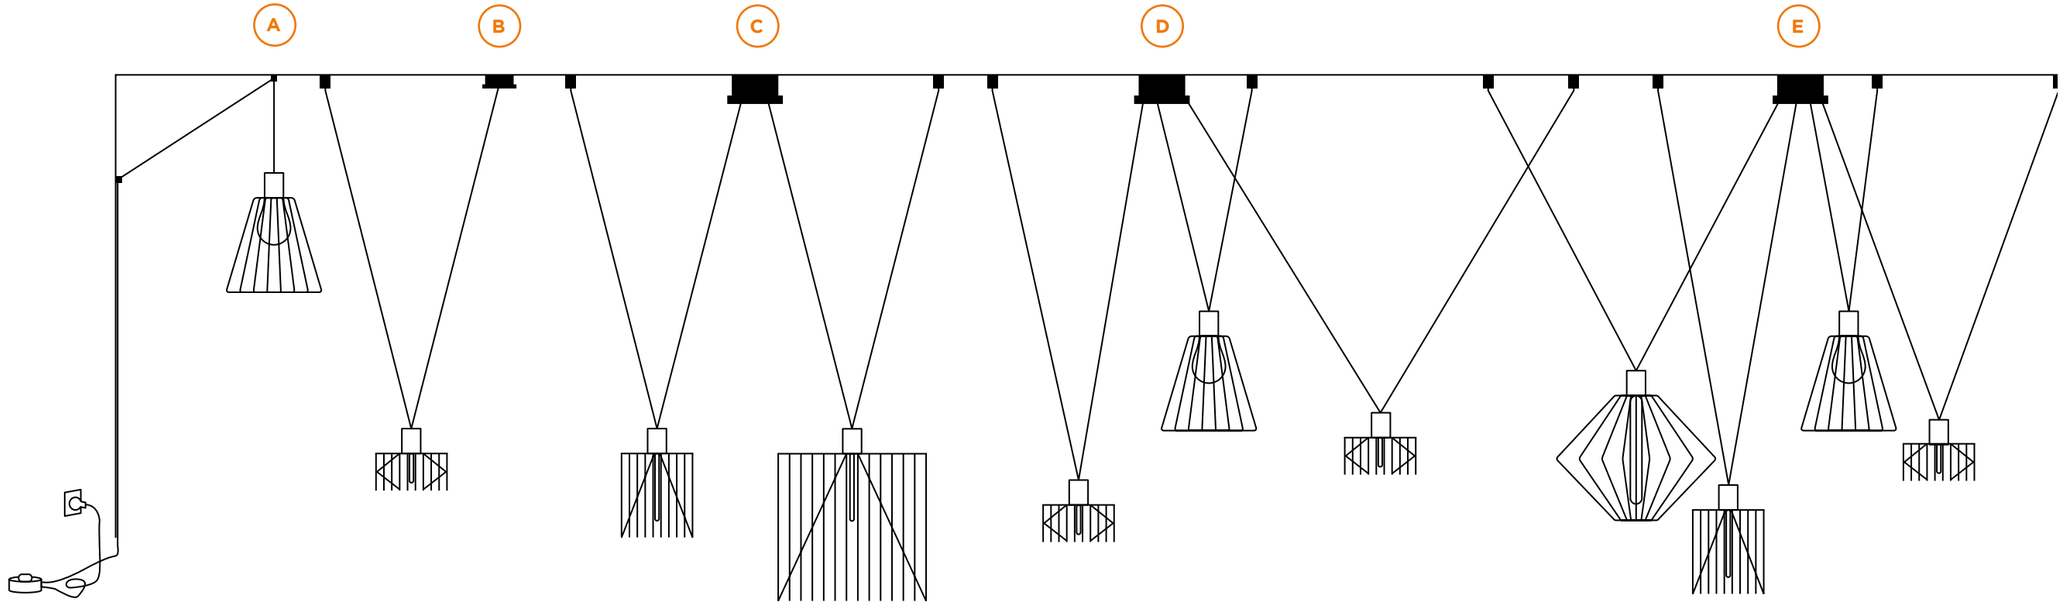

decenter











1.0 CONE

	EUR	CODE
	185,00	
	185,00	

2.0 WIRO

	EUR	CODE
	165,00	

1.8 WIRO

	EUR	CODE
	205,00	
	205,00	

3.8 WIRO

	EUR	CODE
	297,00	
	297,00	

1.1 DIAMOND

	EUR	CODE
	205,00	
	205,00	

A

CABLE PLUG AND PLAY

E27 LED 4-25W | connector set for one shade | black textile cable incl. cable plug with dimmer | 2 cable brackets included

	EUR	CODE
8.5m	168,00	

B

DECENTER SET 1.0

A60 max. 60W | E27
220-240VAC | 50-60Hz
suspension set for 1 shade
round ceiling base | black textile cable
1 base + 1 end stop included

	EUR	CODE
2.6m	108,00	
6m	118,00	

C

DECENTER SET 2.0

2x A60 max. 60W | E27
220-240VAC | 50-60Hz
suspension set for 2 shades
round ceiling base | black textile cable
1 multibase + 2 end stops included

	EUR	CODE
2.6m	198,00	
6m	228,00	

D

DECENTER SET 3.0

3x A60 max. 60W | E27
220-240VAC | 50-60Hz
suspension set for 3 shades
round ceiling base | black textile cable
1 multibase + 3 end stops included

	EUR	CODE
2.6m	286,00	
6m	336,00	

E

DECENTER SET 4.0

4x A60 max. 60W | E27
220-240VAC | 50-60Hz
suspension set for 4 shades
round ceiling base | black textile cable
1 multibase + 4 end stops included

	EUR	CODE
2.6m	368,00	
6m	418,00	



RAIFFEISENBANK | BREM+ZEHNDER INNENARCHITEKTUR DIETIKON | SWITZERLAND





1.0 CONE

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel

IP20

	EUR	CODE
	284,00	
	284,00	

more suspension options on page 487

OPTIONAL

T30-225 5.3W | E27 | phase-cut dim
gold tinted

	EUR	CODE
2200K | 380lm	39,00	
2700K | 425lm	39,00	



2.0 WIRO

A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel

IP20

	EUR	CODE
	264,00	

more suspension options on page 487

OPTIONAL

A60 3.8W | E27 | phase-cut dim
gold tinted

	EUR	CODE
2200K | 245lm	31,00	

A60 5.6W | E27 | phase-cut dim | clear

	EUR	CODE
2700K | 480lm	31,00	



1.8 WIRO

A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel

IP20

	EUR	CODE
	304,00	
	304,00	

more suspension options on page 487

OPTIONAL

A60 3.8W | E27 | phase-cut dim
gold tinted

	EUR	CODE
2200K | 245lm	31,00	

A60 5.6W | E27 | phase-cut dim | clear

	EUR	CODE
2700K | 480lm	31,00	

T30-225 5.3W | E27 | phase-cut dim
gold tinted

	EUR	CODE
2200K | 380lm	39,00	
2700K | 425lm	39,00	

MORE VERSIONS ONLINE

BERND STEINHUBER



PRIVATE RESIDENCE | STUDIO BENOIT BELGIUM



3.8

A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel

IP20

	EUR	CODE
	396,00	
	396,00	

more suspension options on page 487

OPTIONAL

A60 3.8W | E27 | phase-cut dim
gold tinted

	EUR	CODE
2200K | 245lm	31,00	

A60 5.6W | E27 | phase-cut dim | clear

	EUR	CODE
2700K | 480lm	31,00	

T30-225 5.3W | E27 | phase-cut dim
gold tinted

	EUR	CODE
2200K | 380lm	39,00	
2700K | 425lm	39,00	



6.1

A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel

IP20

	EUR	CODE
	450,00	
	450,00	

OPTIONAL

A60 3.8W | E27 | phase-cut dim
gold tinted

	EUR	CODE
2200K | 245lm	31,00	

A60 5.6W | E27 | phase-cut dim | clear

	EUR	CODE
2700K | 480lm	31,00	

T30-300 7.2W/7.4W | E27
phase-cut dim | gold tinted

	EUR	CODE
2200K | 585lm	43,00	
2700K | 610lm	43,00	



6.5

A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel

IP20

	EUR	CODE
	596,00	
	596,00	

OPTIONAL

A60 3.8W | E27 | phase-cut dim
gold tinted

	EUR	CODE
2200K | 245lm	31,00	

A60 5.6W | E27 | phase-cut dim | clear

	EUR	CODE
2700K | 480lm	31,00	

T30-300 7.2W/7.4W | E27
phase-cut dim | gold tinted

	EUR	CODE
2200K | 585lm	43,00	
2700K | 610lm	43,00	

MORE VERSIONS ONLINE

BERND STEINHUBER



RESTAURANT QUEBRACHO STEAKHOUSE & MIXOLOGY | MICHELE MEZZINA PESCARA | ITALY





1.1 DIAMOND

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel

IP20

	EUR	CODE
	314,00	
	314,00	

more suspension options on page 487



2.0 DIAMOND

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel

IP20

	EUR	CODE
	655,00	
	655,00	



3.0 DIAMOND

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel

IP20

	EUR	CODE
	925,00	
	925,00	

OPTIONAL

T30-300 7.2W/7.4W | E27
phase-cut dim | gold tinted

	EUR	CODE
2200K | 585lm	43,00	
2700K | 610lm	43,00	

OPTIONAL

T30-300 7.2W/7.4W | E27
phase-cut dim | gold tinted

	EUR	CODE
2200K | 585lm	43,00	
2700K | 610lm	43,00	

OPTIONAL

T30-300 7.2W/7.4W | E27
phase-cut dim | gold tinted

	EUR	CODE
2200K | 585lm	43,00	
2700K | 610lm	43,00	

MORE VERSIONS ONLINE

BERND STEINHUBER



APARTMENT RONDA SANT PERE | DANIEL NASSAR SPAIN



reddot award 2019
winner lighting design



MORE VERSIONS ONLINE

Ceiling suspended

1.1 PAR16

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

	EUR	CODE
	213,00	
	213,00	
	208,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905



1.1 E27

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium

IP20

	EUR	CODE
	213,00	
	213,00	
	208,00	

OPTIONAL

A60 9W | E27 | phase-cut dim | opal

	EUR	CODE
2700K | 800lm	14,50	



1.2 E27

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | grey felt

IP20

	EUR	CODE
	276,00	
	257,00	
	249,00	

OPTIONAL

A60 9W | E27 | phase-cut dim | opal

	EUR	CODE
2700K | 800lm	14,50	



back



ADESA | MARKEY & SCHELSTRAETE TIENEN | BELGIUM


BF3


BK3


BB3


BK4


BB4

reddot award 2019
winner lighting design



MORE VERSIONS ONLINE

Ceiling suspended

639

725 | 735

1.3

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | grey felt

IP20

	EUR	CODE
	353,00	
	342,00	
	329,00	

OPTIONAL

A60 9W | E27 | phase-cut dim | opal

	EUR	CODE
2700K | 800lm	14,50	



1.4

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium

IP20

	EUR	CODE
	395,00	
	383,00	

OPTIONAL

A60 9W | E27 | phase-cut dim | opal

	EUR	CODE
2700K | 800lm	14,50	

back



LINK LAB CREATIVE OFFICE | STAY STUDIO KORTRIJK | BELGIUM

reddot winner 2021

Ceiling suspended

293

395







1.0 MICROPRISMATIC

LED PCB 35W | DALI-2 | push dim
220-240VAC | 50-60Hz | incl. driver
aluminium
microprismatic PMMA cover

IP20 L80|60K UGR ≤ 19

	EUR	CODE
	785,00	
	785,00	

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	3660	>90	5
4000K	3660	>90	7

UGR ≤ 19
65°≤ 3000cd
microprismatic

1.0 OPAL

LED PCB 35W | DALI-2 | push dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA cover

IP20 L80|60K

	EUR	CODE
	775,00	
	775,00	

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	3700	>90	5
4000K	3700	>90	7

back

CHOOSE YOUR BASE

low

AL BL EL FL FL FL

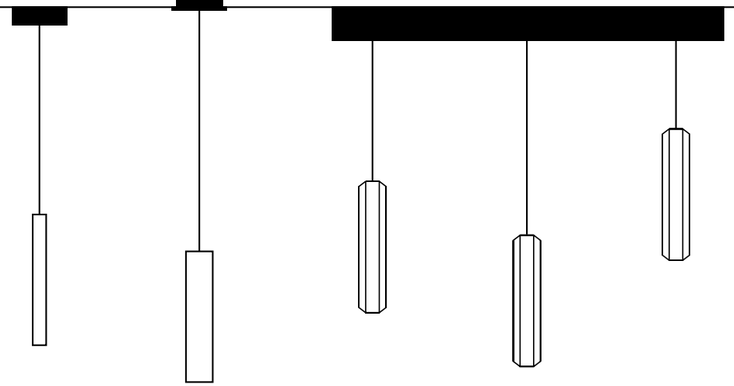









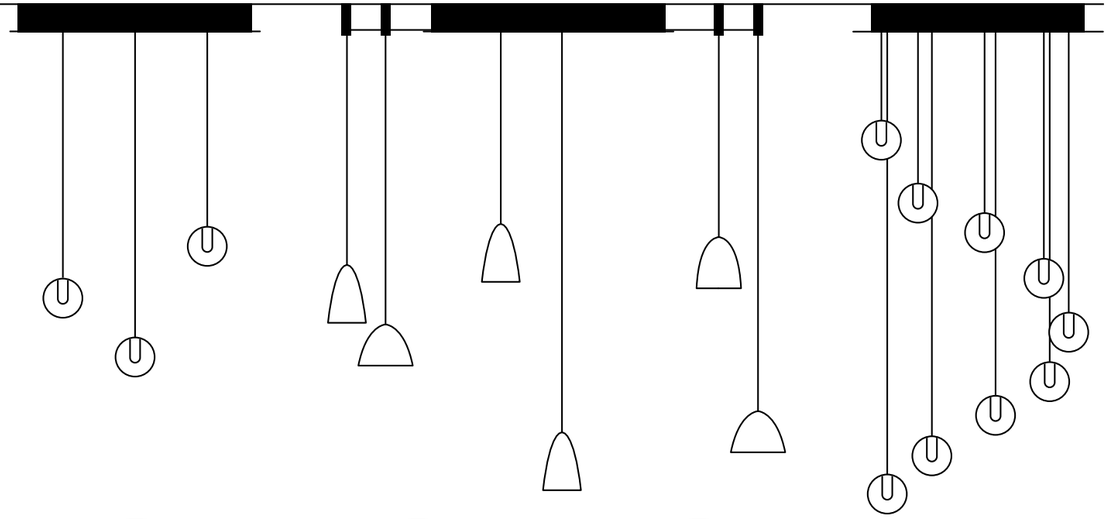







AL | SINGLE BASE

ceiling base round
phase-cut dim | 350mA | incl. driver

	EUR	CODE
	65,00	
	65,00	
	65,00	
	65,00	
	65,00	
	65,00	

DALI versions on page 920

OPLIA

phase-cut dim | 250mA | incl. driver

	EUR	CODE
	65,00	
	65,00	
	65,00	

DALI versions on page 920

BL | SEMI RECESSED SINGLE BASE

phase-cut dim | 350mA | incl. driver

73-76 70 10-35

	EUR	CODE
	85,00	
	85,00	
	85,00	
	85,00	
	85,00	

OPLIA

phase-cut dim | 250mA | incl. driver

	EUR	CODE
	75,00	
	75,00	
	75,00	

EL | MULTI BASE LINEAR

3, 6 or 9 luminaires | phase-cut dim
incl. driver | 175mA per luminaire
600mm | 1200mm | 1800mm

	EUR	CODE
for 3	165,00	
for 3	165,00	
for 6	270,00	
for 6	270,00	
for 9	395,00	
for 9	395,00	

GL | TRACK ADAPTER

for 3-phase tracks
phase-cut dim | 350mA | incl. driver

	EUR	CODE
	46,00	
	46,00	

DALI versions on page 920

OPLIA

phase-cut dim | 250mA | incl. driver

	EUR	CODE
	46,00	
	46,00	

DALI versions on page 920

FL | MULTI CHANDELIER

3 luminaires | 3x175mA
phase-cut dim | incl. driver
COZY CONE | MATCH | TRACE
ODREY | OPLIA

	EUR	CODE
	260,00	
	300,00	
	260,00	
	260,00	
	260,00	

RAY MINI | HEXO MINI | SOLLI

	EUR	CODE
	260,00	
	300,00	
	260,00	
	260,00	
	260,00	

FL | MULTI CHANDELIER

6 luminaires | 6x175mA
phase-cut dim | incl. driver
COZY CONE | MATCH | TRACE
ODREY | OPLIA

	EUR	CODE
	295,00	
	335,00	
	295,00	
	295,00	
	295,00	

RAY MINI | HEXO MINI | SOLLI

	EUR	CODE
	295,00	
	335,00	
	295,00	
	295,00	
	295,00	

FL | MULTI CHANDELIER

9 luminaires | 9x175mA
phase-cut dim | incl. driver
COZY CONE | MATCH | TRACE
ODREY | OPLIA

	EUR	CODE
	330,00	
	370,00	
	330,00	
	330,00	
	330,00	

RAY MINI | HEXO MINI | SOLLI

	EUR	CODE
	330,00	
	370,00	
	330,00	
	330,00	
	330,00	

HOOK

optional for
FL | MULTI CHANDELIER

	EUR	CODE
	19,00	
	19,00	

more Multi chandelier options
on page 920

back





Low voltage
Ceiling suspended

345

CHOOSE YOUR BASE

AL | Single base
ceiling base round | 350mA
phase-cut dim | incl. driver

EUR	CODE
65,00	
65,00	
65,00	



BL | Semi recessed single base
EL | Multi base linear

FL | Multi chandelier
6 luminaires | 6x175mA | 1440lm
phase-cut dim | incl. driver

EUR	CODE
295,00	
335,00	
295,00	

GL | Track adapter
more infos on page 500

LOXONE VERSIONS ONLINE

1.0

LED COB 6W | 350mA | 18V
aluminium | glass
black and T fixtures – black cable
others – white cable

IP20 M-40° L80|50K

2700K | CRI >90 | 500lm

EUR	CODE
125,00	
125,00	
125,00	
133,00	
125,00	



2.0

LED COB 6W | 350mA | 18V
aluminium | glass
black and T fixtures – black cable
others – white cable

IP20 M-40° L80|50K

2700K | CRI >90 | 510lm

EUR	CODE
130,00	
130,00	
130,00	
138,00	
130,00	



3.0

LED COB 6W | 350mA | 18V
aluminium | glass
black and T fixtures – black cable
others – white cable

IP20 M-40° L80|50K

2700K | CRI >90 | 545lm

EUR	CODE
135,00	
135,00	
135,00	
143,00	
135,00	

back



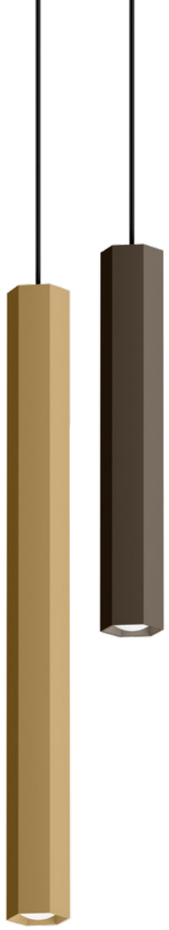

Low voltage
Ceiling suspended



243



375 | 391





611





CHOOSE YOUR BASE

AL | Single base
ceiling base round | 350mA
phase-cut dim | incl. driver

	EUR	CODE
	65,00	
	65,00	
	65,00	

BL | Semi recessed single base
EL | Multi base linear
FL | Multi chandelier
GL | Track adapter
more infos on page 500

LOXONE VERSIONS ONLINE

3.0

LED COB 6W | 350mA | 18V
aluminium

IP20 W-75° L80|50K

	EUR	CODE
	186,00	
	186,00	
	186,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	525	>90	3
3000K	565	>90	5

5.0

LED COB 6W | 350mA | 18V
aluminium

IP20 W-75° L80|50K

	EUR	CODE
	206,00	
	206,00	
	206,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	525	>90	3
3000K	565	>90	5



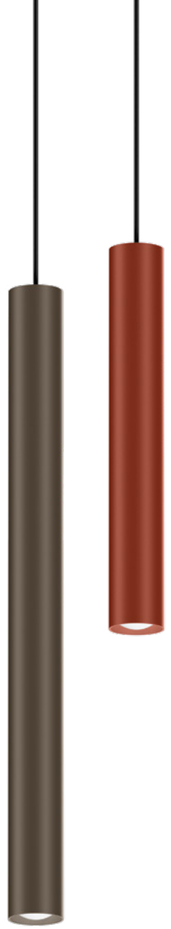

Low voltage
Ceiling suspended


247


375 | 391




613





CHOOSE YOUR BASE

AL | Single base
ceiling base round | 350mA
phase-cut dim | incl. driver

	EUR	CODE
	65,00	
	65,00	
	65,00	

BL | Semi recessed single base
EL | Multi base linear
FL | Multi chandelier
GL | Track adapter
more infos on page 500

LOXONE VERSIONS ONLINE

3.0

LED COB 6W | 350mA | 18V
aluminium
white and LS fixtures –white cable
others – black cable

IP20 W-75° L80|50K

	EUR	CODE
	179,00	
	179,00	
	179,00	
	179,00	
	179,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	525	>90	3
3000K	565	>90	5

5.0

LED COB 6W | 350mA | 18V
aluminium
white and LS fixtures –white cable
others – black cable

IP20 W-75° L80|50K

	EUR	CODE
	199,00	
	199,00	
	199,00	
	199,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	525	>90	3
3000K	565	>90	5







MORE VERSIONS + LOXONE ONLINE

CHOOSE YOUR BASE

AL | Single base
ceiling base round | 350mA
phase-cut dim | incl. driver

	EUR	CODE
	65,00	
	65,00	
	65,00	
	65,00	
	65,00	

BL | Semi recessed single base

EL | Multi base linear
3 luminaires | 3x175mA | 525mm
phase-cut dim | incl. driver

	EUR	CODE
	165,00	
	165,00	

FL | Multi chandelier
GL | Track adapter
more infos on page 500



3.0

LED COB 6W | 350mA | 18V
aluminium
white fixtures – white cable
others – black cable

IP20 W-54° L80|50K

	EUR	CODE
	116,00	
	123,00	
	123,00	
	123,00	
	116,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	490	>90	3
3000K	520	>90	5



5.0

LED COB 6W | 350mA | 18V
aluminium
white fixtures – white cable
others – black cable

IP20 W-54° L80|50K

	EUR	CODE
	129,00	
	138,00	
	138,00	
	138,00	
	129,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	490	>90	3
3000K	520	>90	5





PRIVATE RESIDENCE | IN LIJN INTERIEUR ARCHITECTUUR BELGIUM

DESIGN AWARD 2024

reddot winner 2023



Low voltage
Ceiling suspended



261 | 269 | 273



351





593 | 595



CHOOSE YOUR BASE

AL | Single base
ceiling base round | 350mA
phase-cut dim | incl. driver

	EUR	CODE
	65,00	
	65,00	
	65,00	
	65,00	

BL | Semi recessed single base

EL | Multi base linear
3 luminaires | 3x175mA | 525mm
phase-cut dim | incl. driver

	EUR	CODE
	165,00	
	165,00	

FL | Multi chandelier
GL | Track adapter
more infos on page 500

2.0

LED COB 6W | 350mA | 17V
aluminium
white fixtures – white cable
others – black cable

IP20 W-75° L80|50K

	EUR	CODE
	213,00	
	215,00	
	215,00	
	213,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	565	>90	3
3000K	590	>90	5

LOXONE VERSIONS ONLINE

back





PRIVATE RESIDENCE | STUDIO FOOLEN THE NETHERLANDS

DESIGN AWARD 2024

reddot winner 2023



Low voltage
Ceiling suspended



261 | 269 | 273



351





593 | 595





CHOOSE YOUR BASE

AL | Single base
ceiling base round | 350mA
phase-cut dim | incl. driver

	EUR	CODE
	65,00	
	65,00	
	65,00	
	65,00	

BL | Semi recessed single base
EL | Multi base linear
FL | Multi chandelier
GL | Track adapter
more infos on page 500

MORE VERSIONS + LOXONE ONLINE

3.0

LED COB 6W | 350mA | 18V
aluminium
white fixtures – white cable
others – black cable

IP20 W-54° L80|50K

	EUR	CODE
	135,00	
	142,00	
	142,00	
	135,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	490	>90	3
3000K	520	>90	5

5.0

LED COB 6W | 350mA | 18V
aluminium
white fixtures – white cable
others – black cable

IP20 W-54° L80|50K

	EUR	CODE
	144,00	
	153,00	
	153,00	
	144,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	450	>90	3
3000K	475	>90	5

back









Low voltage
Ceiling suspended



353 | 379





599

CHOOSE YOUR BASE

AL | Single base
ceiling base round | 350mA
phase-cut dim | incl. driver

	EUR	CODE
	65,00	
	65,00	
	65,00	
	65,00	
	65,00	

BL | Semi recessed single base
EL | Multi base linear
FL | Multi chandelier
GL | Track adapter
more infos on page 500

LOXONE VERSIONS ONLINE

1.1

LED COB 7W | 350mA | 18V
aluminium
white fixtures – white cable
others – black cable

IP20 M-32° L70|55K

	EUR	CODE
	172,00	
	172,00	
	172,00	
	172,00	
	172,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	400	>90	3
3000K	445	>90	5

1.2

LED COB 7W | 350mA | 18V
aluminium | shade matching
incl inner cover
white fixtures – white cable
others – black cable

IP20 M-32° L70|55K

	EUR	CODE
	238,00	
	238,00	
	238,00	
	238,00	
	238,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	400	>90	3
3000K	445	>90	5

1.3

LED COB 7W | 350mA | 18V
aluminium
white fixtures – white cable
others – black cable

IP20 M-32° L70|55K

	EUR	CODE
	173,00	
	173,00	
	173,00	
	173,00	
	173,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	450	>90	3
3000K	470	>90	5




WW


QQ


BL


BG


BB



Low voltage
Ceiling suspended


353 | 379




599





CHOOSE YOUR BASE

AL | Single base
ceiling base round | 350mA
phase-cut dim | incl. driver

	EUR	CODE
	65,00	
	65,00	
	65,00	
	65,00	
	65,00	

BL | Semi recessed single base
EL | Multi base linear
FL | Multi chandelier
GL | Track adapter
more infos on page 500

LOXONE VERSIONS ONLINE

1.4

LED COB 7W | 350mA | 18V
aluminium
white fixtures – white cable
others – black cable

IP20 M-32° L70|55K

	EUR	CODE
	180,00	
	180,00	
	180,00	
	180,00	
	180,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	450	>90	3
3000K	470	>90	5

1.5

LED COB 7W | 350mA | 18V
aluminium
white fixtures – white cable
others – black cable

IP20 M-32° L70|55K

	EUR	CODE
	183,00	
	183,00	
	183,00	
	183,00	
	183,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	450	>90	3
3000K	470	>90	5

1.6

LED COB 7W | 350mA | 18V
aluminium
white fixtures – white cable
others – black cable

IP20 M-32° L70|55K

	EUR	CODE
	184,00	
	184,00	
	184,00	
	184,00	
	184,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	480	>90	3
3000K	505	>90	5

optional inner cover on page 910

RADIOLOGY AZ MONICA | EEF DEBEUF INTERIEURARCHITECT ANTWERP | BELGIUM

back





Low voltage
Ceiling suspended

357

LOXONE VERSIONS ONLINE

CHOOSE YOUR BASE

AL | Single base
ceiling base round | 250mA
phase-cut dim | incl. driver

	EUR	CODE
	65,00	
	65,00	
	65,00	

BL | Semi recessed single base
EL | Multi base linear

FL | Multi chandelier
6 luminaires | 6x175mA | 1020lm
phase-cut dim | incl. driver

	EUR	CODE
	295,00	
	295,00	
	295,00	

GL | Track adapter
more infos on page 500



1.0

LED PCB 4W | 250mA | 12V
aluminium | glass
white fixtures – white cable
others – black cable

IP20 L80|100K

2700K | CRI >90 | 245lm

	EUR	CODE
	142,00	
	142,00	
	142,00	



SPICY LEMON | STAY STUDIO KORTRIJK | BELGIUM



Low voltage
Ceiling suspended



1.0

LED COB 7W | 350mA | 18V
aluminium
artisanal hand blown glass

IP20 L80|50K

	EUR	CODE
	230,00	
	230,00	
	192,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	360	>90	3
3000K	370	>90	5

CHOOSE YOUR BASE

AL | Single base
ceiling base round | 350mA
phase-cut dim | incl. driver

	EUR	CODE
	65,00	
	65,00	
	65,00	

BL | Semi recessed single base
EL | Multi base linear
FL | Multi chandelier
GL | Track adapter
more infos on page 500

LOXONE VERSIONS ONLINE

back



PRIVATE RESIDENCE | AGENCE BÉATRICE CASSAN FRANCE



Low voltage
Ceiling suspended





CHOOSE YOUR BASE

AL | Single base
ceiling base round | 350mA
phase-cut dim | incl. driver

	EUR	CODE
	65,00	
	65,00	
	65,00	

BL | Semi recessed single base
EL | Multi base linear
FL | Multi chandelier
GL | Track adapter
more infos on page 500

LOXONE VERSIONS ONLINE

1.0

LED COB 7W | 350mA | 18V
aluminium | PET felt material
artisanal hand blown glass
noise absorbing material

IP20 L80|50K

	EUR	CODE
	321,00	
	321,00	
	321,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	265	>90	3
3000K	275	>90	5

2.0

LED COB 7W | 350mA | 18V
aluminium | PET felt material
artisanal hand blown glass
noise absorbing material

IP20 L80|50K

	EUR	CODE
	328,00	
	328,00	
	328,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	275	>90	3
3000K	285	>90	5

3.0

full acoustic element
aluminium | PET felt material
incl. black single base
noise absorbing material

	EUR	CODE
	206,00	
	206,00	
	206,00	

back



CHOOSE YOUR BASE

high

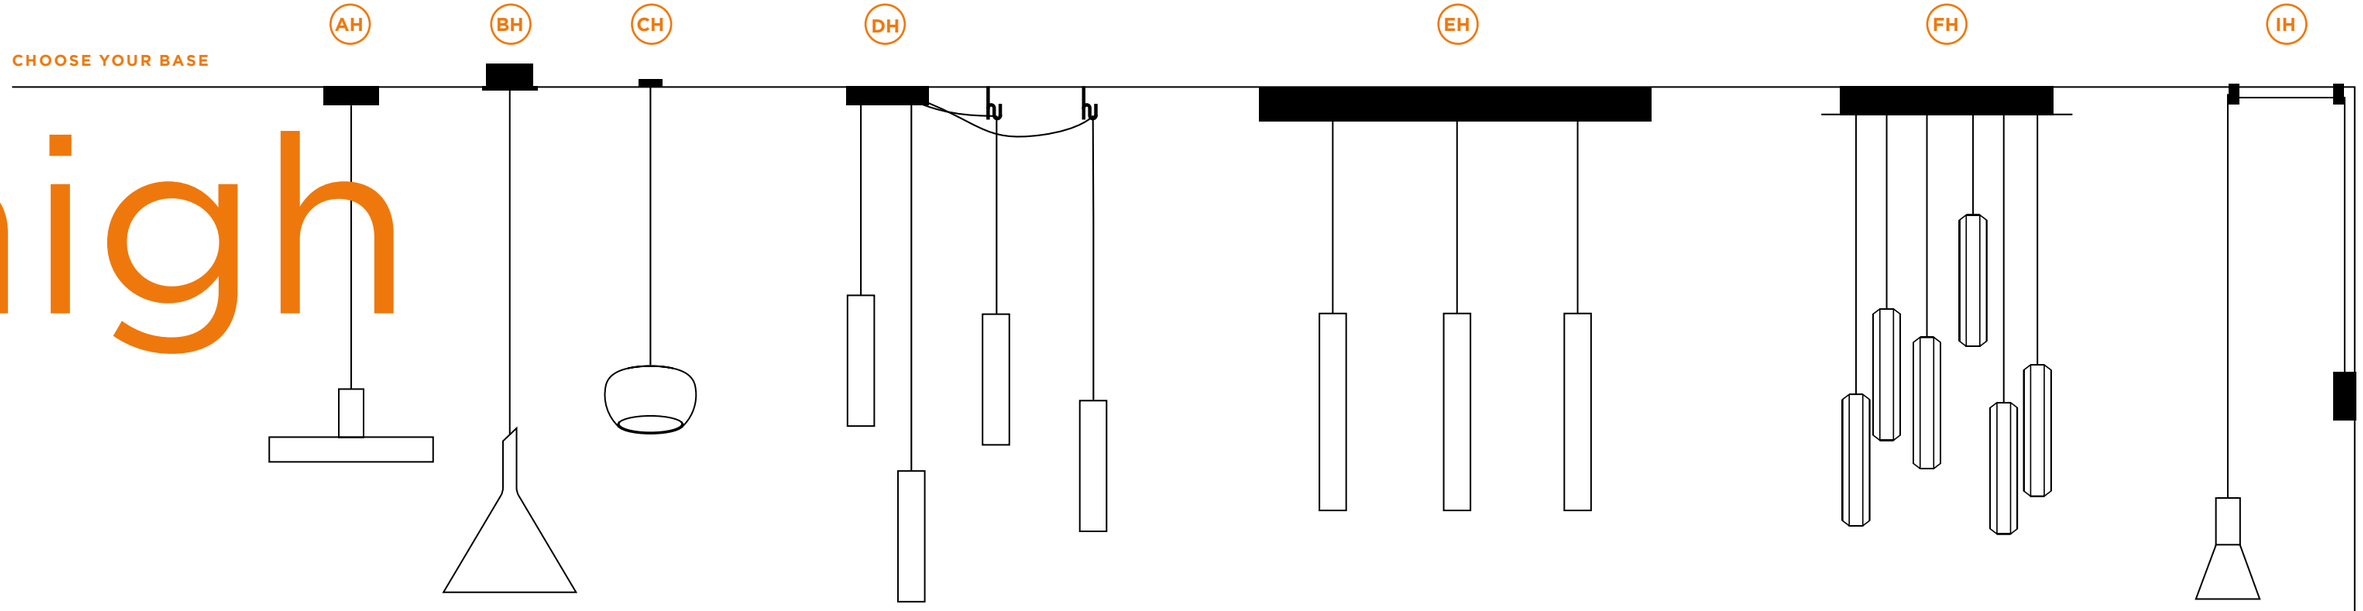



AH | SINGLE BASE

ceiling base round

	EUR	CODE
	29,00	
	29,00	
	29,00	
	29,00	
	29,00	
	29,00	



BH | SEMI RECESSED SINGLE BASE

ø 73-76 | 70 | 10-35

	EUR	CODE
	48,00	
	48,00	
	48,00	
	48,00	
	48,00	



CH | INVISIBLE SINGLE BASE

plasterkit | system - with fixation
max. 10kg

ø 68 | 70 | 12.5-27.50

	EUR	CODE
	108,00	
	108,00	



DH | MULTI BASE ROUND

up to max. 4 | 8 luminaires

	EUR	CODE
max. 4	65,00	
max. 4	65,00	
max. 8	78,00	
max. 8	78,00	



EH | MULTI BASE LINEAR

1-9 luminaires
600mm | 900mm | 1800mm

		EUR	CODE
	for 3	120,00	
	for 3	120,00	
	for 6	180,00	
	for 6	180,00	
	for 9	260,00	
	for 9	260,00	



FH | MULTI CHANDELIER

1-9 luminaires

	EUR	CODE
	235,00	
	275,00	
	235,00	
	235,00	
	235,00	

optional hook

	EUR	CODE
	19,00	
	19,00	



GH | TRACK ADAPTER

for 1-phase tracks

	EUR	CODE
	16,00	
	16,00	



for 3-phase tracks

	EUR	CODE
	16,00	
	16,00	



IH | WALL BASE

for 1 luminaire | incl. 2 wall-ceiling brackets | for cable 4.25-5.5mm diameter | incl. switch on/off

	EUR	CODE
	58,00	
	58,00	

wall - ceiling bracket

	EUR	CODE
	11,50	
	11,50	

back



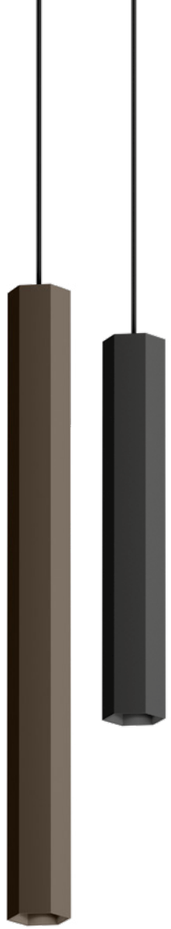

High voltage
Ceiling suspended

243

375 | 391

611





CHOOSE YOUR BASE

AH | Single base
ceiling base round | ø83

	EUR	CODE
	29,00	
	29,00	
	29,00	

BH | Semi recessed single base
CH | Invisible single base
DH | Multi base round
EH | Multi base linear
FH | Multi chandelier
GH | Track adapter
IH | Wall base
more infos on page 528

3.0

PAR11 max. 12W | GU10
220-240VAC | 50-60Hz
aluminium

IP20

	EUR	CODE
	122,00	
	122,00	
	122,00	

OPTIONAL

PAR11 4.3W | GU10 | phase-cut dim

	EUR	CODE
2700K | 225lm	14,50	
3000K | 235lm	14,50	

5.0

PAR11 max. 12W | GU10
220-240VAC | 50-60Hz
aluminium

IP20

	EUR	CODE
	142,00	
	142,00	
	142,00	

OPTIONAL

PAR11 4.3W | GU10 | phase-cut dim

	EUR	CODE
2700K | 225lm	14,50	
3000K | 235lm	14,50	

back



GREENHOUSE BXL | INTERVEST OFFICES & WAREHOUSES DIEGEM | BELGIUM



High voltage
Ceiling suspended





3.0 LED

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-36° L80|55K

	EUR	CODE
	197,00	
	197,00	
	197,00	
	195,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	405	>90	3
3000K	425	>90	5
2000-3000K	260	>90	9

LED module 20 years replaceability



3.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

	EUR	CODE
	111,00	
	111,00	
	111,00	
	109,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905

CHOOSE YOUR BASE

AH | Single base
ceiling base round | ø83

	EUR	CODE
	29,00	
	29,00	
	29,00	

BH | Semi recessed single base
CH | Invisible single base
DH | Multi base round
EH | Multi base linear
FH | Multi chandelier
GH | Track adapter
IH | Wall base
more infos on page 528

LOXONE VERSIONS ONLINE

back





High voltage
Ceiling suspended

247

375 | 391

613





CHOOSE YOUR BASE

AH | Single base
ceiling base round | ø83

	EUR	CODE
	29,00	
	29,00	
	29,00	

BH | Semi recessed single base
ceiling base round | ø84

	EUR	CODE
	48,00	
	48,00	
	48,00	

CH | Invisible single base
DH | Multi base round
EH | Multi base linear
FH | Multi chandelier
GH | Track adapter
IH | Wall base
more infos on page 528

3.0

PAR11 max. 12W | GU10
220-240VAC | 50-60Hz
aluminium
white and LS fixtures – white cable
others – black cable

IP20

	EUR	CODE
	115,00	
	115,00	
	115,00	
	115,00	
	115,00	

OPTIONAL

PAR11 4.3W | GU10 | phase-cut dim

	EUR	CODE
2700K | 240lm	14,50	
2700K | 225lm	14,50	
3000K | 255lm	14,50	
3000K | 235lm	14,50	

5.0

PAR11 max. 12W | GU10
220-240VAC | 50-60Hz
aluminium
white and LS fixtures – white cable
others – black cable

IP20

	EUR	CODE
	135,00	
	135,00	
	135,00	
	135,00	

OPTIONAL

PAR11 4.3W | GU10 | phase-cut dim

	EUR	CODE
2700K | 240lm	14,50	
2700K | 225lm	14,50	
3000K | 255lm	14,50	
3000K | 235lm	14,50	



ANDERSEN AARHUS | AK83 ARKITEKTER COPENHAGEN | DENMARK

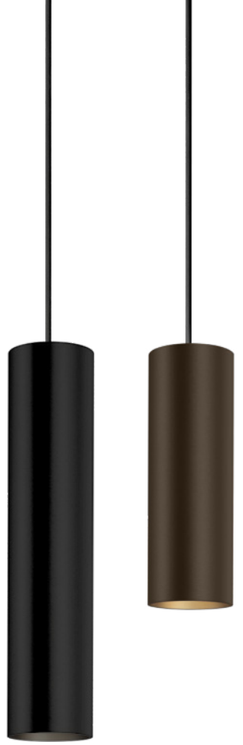

High voltage
Ceiling suspended



2.0 | 3.0 LED

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white fixtures – white cable
others – black cable

IP20 M-36° L80|55K

2.0

200mm	EUR	CODE
	178,00	
	185,00	
	185,00	
	185,00	
	185,00	
	185,00	
	178,00	

3.0

300mm	EUR	CODE
	184,00	
	191,00	
	191,00	
	191,00	
	191,00	
	191,00	
	184,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	405	>90	3
3000K	425	>90	5
2000-3000K	570	>90	9

LED module 20 years replaceability



2.0 | 3.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
white fixtures – white cable
others – black cable

IP20

2.0

200mm	EUR	CODE
	92,00	
	99,00	
	99,00	
	99,00	
	99,00	
	99,00	
	92,00	

3.0

300mm	EUR	CODE
	98,00	
	105,00	
	105,00	
	105,00	
	105,00	
	105,00	
	98,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905

CHOOSE YOUR BASE

AH | Single base
ceiling base round | ø83

	EUR	CODE
	29,00	
	29,00	
	29,00	
	29,00	
	29,00	
	29,00	

BH | Semi recessed single base
CH | Invisible single base
DH | Multi base round
EH | Multi base linear
FH | Multi chandelier
GH | Track adapter
IH | Wall base
more infos on page 528

LOXONE VERSIONS ONLINE

251
377 | 393
615
759
805



RESTAURANT GOLDMARIE | LUKAS NOBILI MAINZ GERMANY

High voltage
Ceiling suspended









1.1

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
white fixtures – white cable
others – black cable

IP20

	EUR	CODE
	168,00	
	168,00	
	168,00	
	168,00	
	168,00	
	168,00	

1.3

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
white fixtures – white cable
others – black cable

IP20

	EUR	CODE
	169,00	
	169,00	
	169,00	
	169,00	
	169,00	
	169,00	

CHOOSE YOUR BASE













AH | Single base
ceiling base round | ø83

	EUR	CODE
	29,00	
	29,00	
	29,00	
	29,00	
	29,00	

BH | Semi recessed single base
CH | Invisible single base
DH | Multi base round
EH | Multi base linear
FH | Multi chandelier
GH | Track adapter
IH | Wall base
more infos on page 528

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905



HOTEL MEERBERG PERTISAU | AUSTRIA



High voltage
Ceiling suspended



353 | 379





599



1.2

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
white fixtures – white cable
others – black cable

IP20



CHOOSE YOUR BASE

AH | Single base
ceiling base round | ø83

	EUR	CODE
	29,00	
	29,00	
	29,00	
	29,00	
	29,00	

BH | Semi recessed single base
CH | Invisible single base
DH | Multi base round
EH | Multi base linear
FH | Multi chandelier
GH | Track adapter
IH | Wall base
more infos on page 528

	EUR	CODE
	234,00	
	234,00	
	234,00	
	234,00	
	234,00	
	234,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905

back


nourishing
food inside.
CAKE
RAW CAKE
ESPRESSO
AMERICANO
FILTER
CAPPUCCINO
FLAT WHITE
LATTE
TEA






WW


GG


QQ


BL


BG


BB











High voltage
Ceiling suspended


353 | 379




599

1.4

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
white fixtures – white cable
others – black cable

IP20

	EUR	CODE
	176,00	
	176,00	
	176,00	
	176,00	
	176,00	
	176,00	

1.5

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
white fixtures – white cable
others – black cable

IP20

	EUR	CODE
	179,00	
	179,00	
	179,00	
	179,00	
	179,00	
	179,00	

1.6

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
white fixtures – white cable
others – black cable

IP20

	EUR	CODE
	180,00	
	180,00	
	180,00	
	180,00	
	180,00	
	180,00	

optional inner cover on page 910

CHOOSE YOUR BASE

AH | Single base
ceiling base round | ø83

	EUR	CODE
	29,00	
	29,00	
	29,00	
	29,00	
	29,00	

BH | Semi recessed single base
CH | Invisible single base
DH | Multi base round
EH | Multi base linear
FH | Multi chandelier
GH | Track adapter
IH | Wall base
more infos on page 528

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905



RESTAURANT WEINTRÄNE | MICHAEL FALTENBACHER CREATION & CONCEPT MUNICH | GERMANY

DESIGN AWARD 2024

reddot winner 2023



High voltage
Ceiling suspended





1.0

G95 max. 12W | E27
220-240VAC | 50-60Hz
aluminium
white fixtures – white cable
others – black cable

IP20

	EUR	CODE
	118,00	
	122,00	
	122,00	
	118,00	

CHOOSE YOUR BASE

AH | Single base
ceiling base round | ø83

	EUR	CODE
	29,00	
	29,00	
	29,00	
	29,00	

BH | Semi recessed single base
CH | Invisible single base
DH | Multi base round
EH | Multi base linear
FH | Multi chandelier
GH | Track adapter
IH | Wall base
more infos on page 528

OPTIONAL

G95 4.5W | E27 | phase-cut dim | clear

	EUR	CODE
2700K | 375lm	33,00	

G95 10W | E27 | phase-cut dim | opal

	EUR	CODE
2700K | 1060lm	33,00	

G95 5.4W | E27 | phase-cut dim
filament | gold tinted

	EUR	CODE
2200K | 380lm	33,00	

back



PRIVATE RESIDENCE | STUDIO BENOIT BELGIUM



High voltage
Ceiling suspended

CHOOSE YOUR BASE

AH | Single base
ceiling base round | ø83

	EUR	CODE
	29,00	
	29,00	
	29,00	

BH | Semi recessed single base
CH | Invisible single base
DH | Multi base round
EH | Multi base linear
FH | Multi chandelier
GH | Track adapter
IH | Wall base
more infos on page 528

LOXONE VERSIONS ONLINE



1.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal hand blown glass
white cable on request

IP20 L80|50K

1800-2850K | CRI >90 | 375lm

	EUR	CODE
	299,00	

1800-2850K | >90 CRI | 525lm

	EUR	CODE
	298,00	



2.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal hand blown glass
white cable on request

IP20 L80|50K

1800-2850K | CRI >90 | 385lm

	EUR	CODE
	337,00	

1800-2850K | >90 CRI | 510lm

	EUR	CODE
	336,00	



3.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal hand blown glass
white cable on request

IP20 L80|50K

1800-2850K | CRI >90 | 445lm

	EUR	CODE
	391,00	

1800-2850K | >90 CRI | 530lm

	EUR	CODE
	390,00	

back



PRIVATE RESIDENCE BELGIUM



High voltage
Ceiling suspended

CHOOSE YOUR BASE

AH | Single base
ceiling base round | ø83

	EUR	CODE
	29,00	
	29,00	
	29,00	



BH | Semi recessed single base
CH | Invisible single base
DH | Multi base round
EH | Multi base linear
FH | Multi chandelier
GH | Track adapter
IH | Wall base
more infos on page 528

LOXONE VERSIONS ONLINE

1.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal Italian hand blown glass
white cable on request

IP20 L80|50K

1800-2850K | CRI >90 | 615lm

	EUR	CODE
	338,00	



2.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal Italian hand blown glass
white cable on request

IP20 L80|50K

1800-2850K | CRI >90 | 510lm

	EUR	CODE
	414,00	



3.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal Italian hand blown glass
white cable on request

IP20 L80|50K

1800-2850K | CRI >90 | 530lm

	EUR	CODE
	473,00	

back



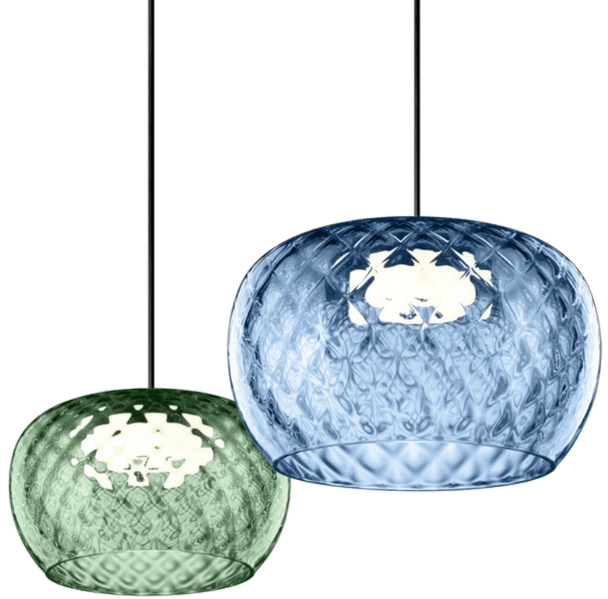

High voltage
Ceiling suspended

CHOOSE YOUR BASE

AH | Single base
ceiling base round | ø83

	EUR	CODE
	29,00	
	29,00	
	29,00	

BH | Semi recessed single base
CH | Invisible single base
DH | Multi base round
EH | Multi base linear
FH | Multi chandelier
GH | Track adapter
IH | Wall base
more infos on page 528

LOXONE VERSIONS ONLINE



1.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal Italian hand blown glass
white cable on request

IP20 L80|50K

1800-2850K | CRI >90 | 520lm

	EUR	CODE
	338,00	
	338,00	
	338,00	
	338,00	



2.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal Italian hand blown glass
white cable on request

IP20 L80|50K

1800-2850K | CRI >90 | 480lm

	EUR	CODE
	414,00	
	414,00	
	414,00	
	414,00	



3.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal Italian hand blown glass
white cable on request

IP20 L80|50K

1800-2850K | CRI >90 | 495lm

	EUR	CODE
	473,00	
	473,00	
	473,00	
	473,00	

back



PRIVATE RESIDENCE | ANA TERRA ITALY

High voltage
Ceiling suspended





CHOOSE YOUR BASE

AH | Single base
ceiling base round | ø83

	EUR	CODE
	29,00	
	29,00	
	29,00	
	29,00	

BH | Semi recessed single base
CH | Invisible single base
DH | Multi base round
EH | Multi base linear
FH | Multi chandelier
GH | Track adapter
IH | Wall base
more infos on page 528

LOXONE VERSIONS ONLINE



1.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal Italian hand blown glass
white cable on request

IP20 L80|50K

1800-2850K | CRI >90 | 495lm

	EUR	CODE
	338,00	

1800-2850K | CRI >90 | 455lm

	EUR	CODE
	338,00	



2.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal Italian hand blown glass
white cable on request

IP20 L80|50K

1800-2850K | CRI >90 | 435lm

	EUR	CODE
	414,00	

1800-2850K | CRI >90 | 420lm

	EUR	CODE
	414,00	



3.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal Italian hand blown glass
white cable on request

IP20 L80|50K

1800-2850K | CRI >90 | 455lm

	EUR	CODE
	473,00	

1800-2850K | CRI >90 | 440lm

	EUR	CODE
	473,00	



PRIVATE RESIDENCE | MD STUDIO MARIA DECU ROMANIA



High voltage
Ceiling suspended

287

631



1.0

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white opal glass hand blown
black cable on request

IP20 L80|50K

	EUR	CODE
	294,00	
	316,00	
	316,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	780	>90	3
3000K	825	>90	5



2.0

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white opal glass hand blown
black cable on request

IP20 L80|50K

	EUR	CODE
	434,00	
	466,00	
	466,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	780	>90	3
3000K	825	>90	5



3.0

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white opal glass hand blown
black cable on request

IP20 L80|50K

	EUR	CODE
	554,00	
	588,00	
	588,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	770	>90	3
3000K	815	>90	5

CHOOSE YOUR BASE

AH | Single base
ceiling base round | ø83

	EUR	CODE
	29,00	
	29,00	

BH | Semi recessed single base
CH | Invisible single base
DH | Multi base round
EH | Multi base linear
FH | Multi chandelier
GH | Track adapter
IH | Wall base
more infos on page 528

back



PRIVATE RESIDENCE GREECE

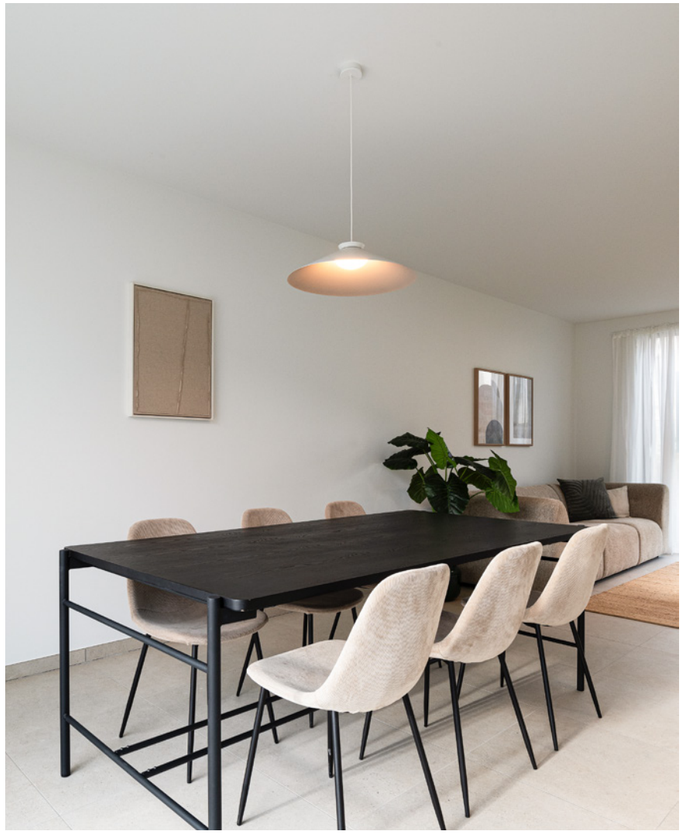

PRIVATE RESIDENCE | ERIBO STIJLBOUWERS BELGIUM



PRIVATE RESIDENCE | ARCHITEKTI MIKULAJ & MIKULAJOVA SLOVAKIA



High voltage
Ceiling suspended



3.0 LED

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium
white cable on request

IP20 L80|50K

1800-2850K | CRI >90 | 710lm

	EUR	CODE
	258,00	
	262,00	
	262,00	
	262,00	
	262,00	
	262,00	
	262,00	



3.0 E27

A60 max. 20W | E27
100-240VAC | 50-60Hz
aluminium
white cable on request

IP20

	EUR	CODE
	175,00	
	179,00	
	179,00	
	179,00	
	179,00	
	179,00	
	179,00	

CHOOSE YOUR BASE

AH | Single base
ceiling base round | ø83

	EUR	CODE
	29,00	
	29,00	
	29,00	

BH | Semi recessed single base
CH | Invisible single base
DH | Multi base round
EH | Multi base linear
FH | Multi chandelier
GH | Track adapter
IH | Wall base
more infos on page 528

OPTIONAL

A60 9W opal | E27 | phase-cut dim

	EUR	CODE
2700K | 800lm	14,50	

LOXONE VERSIONS ONLINE



PRIVATE RESIDENCE | ZEIT ARCHITECTS SLOVAKIA



High voltage
Ceiling suspended







CHOOSE YOUR BASE

AH | Single base
ceiling base round | ø83

	EUR	CODE
	29,00	
	29,00	
	29,00	

BH | Semi recessed single base
CH | Invisible single base
more infos on page 528

LOXONE VERSIONS ONLINE

1.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium
white cable on request

IP20 L80|60K

1800-2850K | CRI >90 | 570lm

	EUR	CODE
	385,00	
	385,00	
	368,00	

2.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium
white cable on request

IP20 L80|60K

1800-2850K | CRI >90 | 750lm

	EUR	CODE
	455,00	
	455,00	
	425,00	

3.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium
white cable on request

IP20 L80|60K

1800-2850K | CRI >90 | 830lm

	EUR	CODE
	516,00	
	516,00	
	483,00	

back





Wall recessed

566 – 581

SPOT LIGHTS



569



571

GUIDE LIGHTS



573



573



575



575

577

579



581



581



581

back

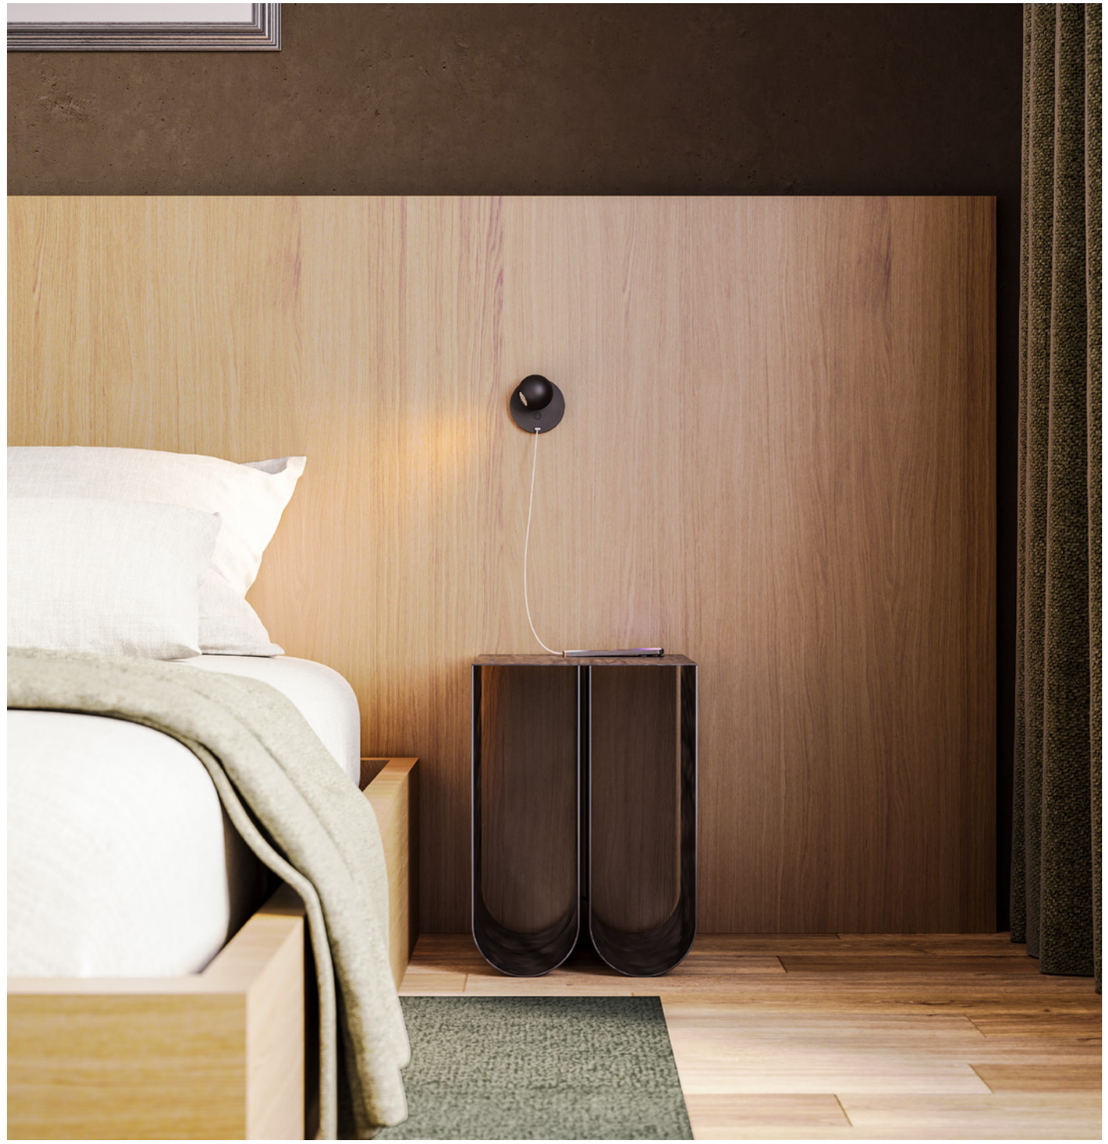







1.0 SEMI RECESSED

LED COB 5W | phase cut-dim
220-240VAC | 50-60Hz | incl. driver
aluminium
incl. switch on / off | push dim
USB-C port | incl. honeycomb
fits standard installation box ø 68

IP20 0°-90°|350° N-17° L80|50K

68-71 36 5-40

2700K | CRI >90 | 240lm

	EUR	CODE
	275,00	
	295,00	
	275,00	



back



PRIVATE RESIDENCE | STUDIO BINNEN NETHERLANDS







1.0 SEMI RECESSED

LED COB 4W | phase cut-dim
220-240VAC | 50-60Hz | incl. driver
aluminium
incl. switch on / off | push dim
USB-C port | installation box

IP20 0°-90°|350° M-23° L80|50K

41x190 55 12.5-32.5

2700K | CRI >90 | 240lm

	EUR	CODE
	275,00	
	295,00	
	295,00	
	295,00	
	275,00	



1.1 SEMI RECESSED

LED COB 4W | phase cut-dim
220-240VAC | 50-60Hz | incl. driver
aluminium
incl. switch on / off | push dim
installation box

IP20 0°-90°|350° M-23° L80|50K

41x190 55 12.5-32.5

2700K | CRI >90 | 240lm

	EUR	CODE
	245,00	
	245,00	

back



PRIVATE RESIDENCE | STUDIO PALINPERÄ FINLAND

Wall recessed





0.8

LED PCB 4W | 350mA | 9V
aluminium

IP20 L80|50K

66x66 L40 min. 12

3000K | CRI >90 | 145lm

	EUR	CODE
	82,00	
	98,00	
	98,00	
	98,00	
	82,00	

2.0

LED PCB 6W | 350mA | 17V
aluminium

IP20 L80|50K

47x182 L40 min. 12

3000K | CRI >90 | 455lm

	EUR	CODE
	122,00	
	122,00	

ALWAYS USE

driver | 350mA

	EUR	CODE
6W	35,00	

more options and specs on page 896

ALWAYS USE

driver | 350mA

	EUR	CODE
6W	35,00	

more options and specs on page 896

OPTIONAL

recessed housing incl. plasterkit

	EUR	CODE
	46,00	

concrete housing

	EUR	CODE
	32,00	

specs on page 914

OPTIONAL

recessed housing incl. plasterkit

	EUR	CODE
	45,00	

concrete housing

	EUR	CODE
	38,00	

specs on page 914



LOXONE VERSION ONLINE

781

835

back



Wall recessed





1.0

LED PCB 2/3W | 350/500mA | 6V
aluminium | anod.

IP20 L80|60K

70x70 35 min. 12

3000K | CRI >90 | 170/235lm

	EUR	CODE
	62,00	
	62,00	
	62,00	

2.0

LED PCB 2/3W | 350/500mA | 6V
aluminium | anod.

IP20 L80|60K

70x70 35 min. 12

3000K | CRI >90 | 85/115lm

	EUR	CODE
	62,00	
	62,00	
	62,00	

ALWAYS USE

driver

	EUR	CODE
6W | 350mA	35,00	
6W | 500mA	33,00	

more options and specs on page 896

ALWAYS USE

driver

	EUR	CODE
6W | 350mA	35,00	
6W | 500mA	33,00	

more options and specs on page 896

OPTIONAL

	EUR	CODE
recessed housing	26,50	
plasterkit	16,50	

recessed housing | always use in combination with plasterkit

OPTIONAL

	EUR	CODE
recessed housing	26,50	
plasterkit	16,50	

recessed housing | always use in combination with plasterkit



LOXONE VERSION ONLINE

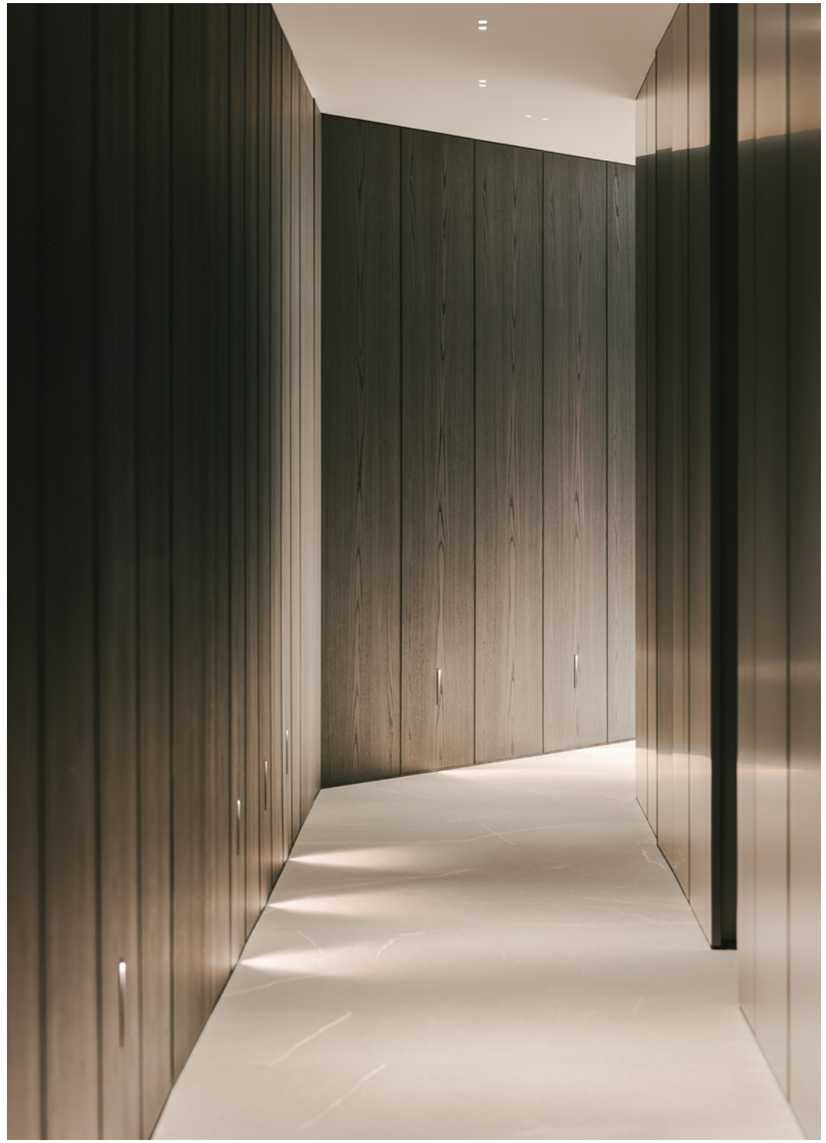

PRIVATE RESIDENCE SPAIN



Wall recessed



1.4

LED PCB 2W | const. volt. | 24V
aluminium

IP20 L70|60K

135x9 18 8-18

3000K | CRI >80 | 15lm

	EUR	CODE
	68,00	
	68,00	

ALWAYS USE

driver | phase-cut dim
min. 2 luminaires per driver

	EUR	CODE
25W	46,00	

revision opening required

more options and specs on page 901

back



PRIVATE RESIDENCE | KILLIAN GARTNER - ROOMS ATELIER AUSTRIA



LOXONE VERSION ONLINE







0.4

LED PCB 1/2W | 350/700mA | 3V
aluminium

IP20 L70|60K

25x56 40 8-18

3000K | CRI >80 | 15/28lm

	EUR	CODE
	55,00	
	56,00	
	56,00	
	55,00	

ALWAYS USE

driver

	EUR	CODE
6W | 350mA	35,00	
6W | 700mA	34,50	

more options and specs on page 896

OPTIONAL

recessed housing incl. plasterkit

	EUR	CODE
	24,00	

driver to be placed externally
specs on page 914

0.7

LED PCB 1/2W | 350/700mA | 3V
aluminium

IP20 L70|60K

25x56 40 8-18

3000K | CRI >80 | 15/28lm

	EUR	CODE
	58,00	
	59,00	
	59,00	
	58,00	

ALWAYS USE

driver

	EUR	CODE
6W | 350mA	35,00	
6W | 700mA	34,50	

more options and specs on page 896

OPTIONAL

recessed housing incl. plasterkit

	EUR	CODE
	24,00	

driver to be placed externally
specs on page 914

2.2

LED PCB 1/2W | 350/700mA | 3V
aluminium

IP20 L70|60K

25x170 40 8-18

3000K | CRI >80 | 20/36lm

	EUR	CODE
	88,00	
	89,00	
	89,00	
	88,00	

ALWAYS USE

driver

	EUR	CODE
6W | 350mA	35,00	
6W | 700mA	34,50	

more options and specs on page 896

OPTIONAL

recessed housing incl. plasterkit

	EUR	CODE
	43,00	

specs on page 914



MAISON BUDISM COUTURE | PEERUTIN KAROL ARCHITECTS CAPETOWN | SOUTH AFRICA

Wall recessed









0.7

LED PCB 2/5W | 350/700mA | 6V
aluminium

IP20 L70|60K

47x182 40 min. 12

3000K | CRI >90 | 70/120lm

	EUR	CODE
	76,00	
	76,00	

0.8

LED PCB 2/5W | 350/700mA | 6V
aluminium

IP20 L70|60K

66x66 40 min. 12

3000K | CRI >90 | 90/150lm

	EUR	CODE
	68,00	
	68,00	

1.3

LED PCB 4/7W | 350/700mA | 9V
aluminium

IP20 L70|60K

115x117 40 min. 12

3000K | CRI >90 | 145/220lm

	EUR	CODE
	89,00	
	89,00	

ALWAYS USE

driver

	EUR	CODE
6W | 350mA	35,00	
6W | 700mA	34,50	

more options and specs on page 896

ALWAYS USE

driver

	EUR	CODE
6W | 350mA	35,00	
6W | 700mA	34,50	

more options and specs on page 896

ALWAYS USE

driver

	EUR	CODE
6W | 350mA	35,00	
7W | 700mA	36,50	

more options and specs on page 896

OPTIONAL

recessed housing incl. plasterkit

	EUR	CODE
	45,00	

concrete housing

	EUR	CODE
	38,00	

specs on page 914

OPTIONAL

recessed housing incl. plasterkit

	EUR	CODE
	46,00	

concrete housing

	EUR	CODE
	32,00	

specs on page 914

OPTIONAL

recessed housing incl. plasterkit

	EUR	CODE
	52,00	

concrete housing

	EUR	CODE
	39,00	

specs on page 914

LOXONE VERSION ONLINE

785

Wall surface

LUMINAIRES


585

589


591


593

595


599


605


607


609


611


613


615


617


619


621


623


625


629


631


633


639


643


647

649


651


657


663


667


669


671

673


679


681


683

SPOT LIGHTS


685


687


689


691

UPLIGHTS


693


695

IP-RATED

697

701

703

705

707

709

711

back



FRENCH VILLAGE CAFÉ & BISTRO | LARA WOODS WOZNICA BELFAST | UNITED KINGDOM

Wall surface

131
181
321



2.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-31° L70|55K

	EUR	CODE
	195,00	
	195,00	
	195,00	
	195,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x260	>90	3
3000K	2x270	>90	5



OPTIONAL

honeycomb louver

	EUR	CODE
	14,50	

LOXONE VERSIONS ONLINE

back





OFFICE REAZN | STUDIO BENOIT KRUISEM | BELGIUM

DESIGN AWARD 2023 · GOOD DESIGN · reddot winner 2023

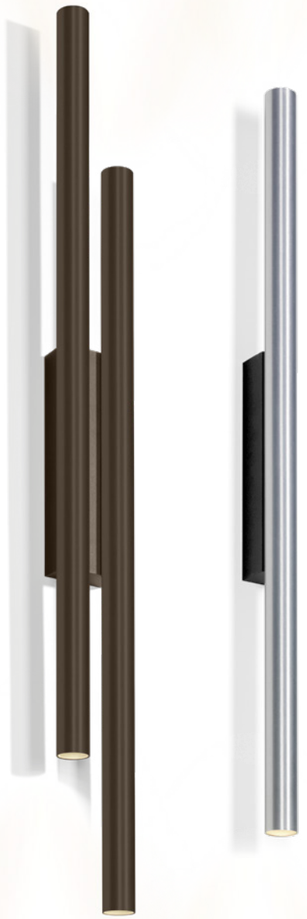





2.0

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-Z3° L80|50K

	EUR	CODE
	189,00	
	189,00	
	189,00	
	189,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x415	>90	3
3000K	2x440	>90	5

4.0

LED COB 23W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-Z3° L80|50K

	EUR	CODE
	288,00	
	288,00	
	288,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	4x415	>90	3
3000K	4x440	>90	5

back



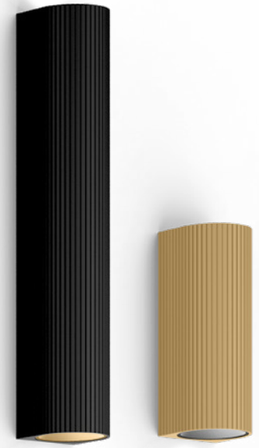





1.0

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-30° L80|50K

	EUR	CODE
	175,00	
	178,00	
	178,00	
	175,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	420	>90	3
3000K	420	>90	5



2.0

LED COB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-30° L80|50K

	EUR	CODE
	232,00	
	238,00	
	238,00	
	232,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	840	>90	3
3000K	840	>90	5

331

back



DESIGN AWARD 2024

reddot winner 2023

261 | 269 | 273

351

511 | 547

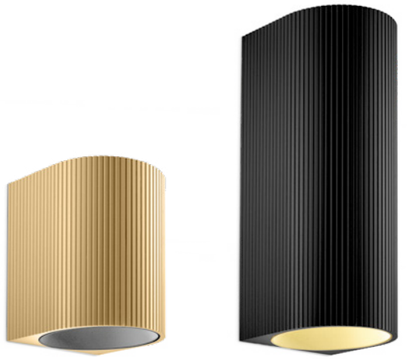













1.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-22° L80|50K

	EUR	CODE
	185,00	
	188,00	
	188,00	
	185,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	575	>90	3
3000K	645	>90	5

2.0

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-22° L80|50K

	EUR	CODE
	252,00	
	258,00	
	258,00	
	252,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x560	>90	3
3000K	2x615	>90	5

back



OFFICE | ALFA ARCHITECTES LYON | FRANCE

DESIGN AWARD 2024

reddot winner 2023

Wall surface

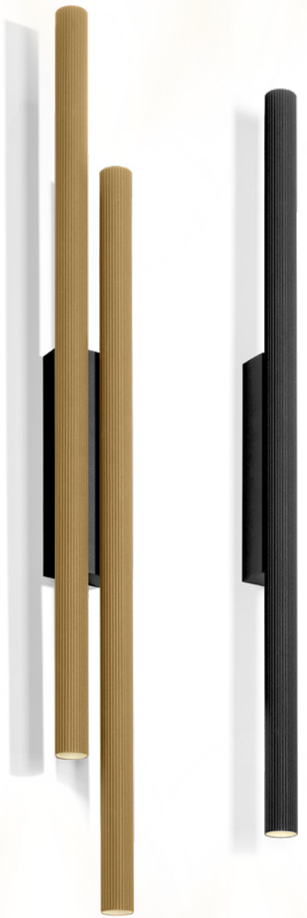



261 | 269 | 273



351



511 | 547





1.0

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-23° L80|50K

	EUR	CODE
	219,00	
	215,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x395	>90	3
3000K	2x420	>90	5

2.0

LED COB 23W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 M-23° L80|50K

	EUR	CODE
	339,00	
	328,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	4x395	>90	3
3000K	4x420	>90	5

back







PRIVATE RESIDENCE | TIPHAINE MODIN FRANCE

Wall surface

353 | 379

517 | 539

table



1.3

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium | steel

IP20

	EUR	CODE
	135,00	
	135,00	
	135,00	
	135,00	
	135,00	
	135,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905



1.4

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium | steel

IP20

	EUR	CODE
	142,00	
	142,00	
	142,00	
	142,00	
	142,00	
	142,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905



1.5

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium | steel

IP20

	EUR	CODE
	145,00	
	145,00	
	145,00	
	145,00	
	145,00	
	145,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905

MORE VERSIONS ONLINE



CABINET DENTAIRE VAUBAN | DAHDAH STUDIO VAUBAN | FRANCE

353 | 379
517 | 539







2.3

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium | steel

IP20

	EUR	CODE
	184,00	
	184,00	
	184,00	
	184,00	
	184,00	
	184,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905

2.4

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium | steel

IP20

	EUR	CODE
	198,00	
	198,00	
	198,00	
	198,00	
	198,00	
	198,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905

2.5

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium | steel

IP20

	EUR	CODE
	204,00	
	204,00	
	204,00	
	204,00	
	204,00	
	204,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905

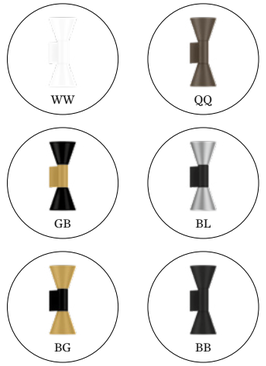

MORE VERSIONS ONLINE



PRIVATE RESIDENCE BELGIUM

Wall surface

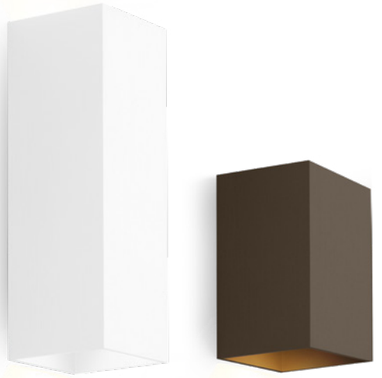





1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

	EUR	CODE
	67,00	
	68,00	
	68,00	
	68,00	
	68,00	
	67,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905

2.0

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

	EUR	CODE
	88,00	
	90,00	
	90,00	
	90,00	
	90,00	
	88,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905



PRIVATE RESIDENCE | THE ART OF LIVING MAGAZINE THE NETHERLANDS

Wall surface











1.0 LED

LED PCB 6W | phase-cut dim 220-240VAC | 50-60Hz
aluminium

IP20 L80|55K

	EUR	CODE
	192,50	
	195,50	
	195,50	
	195,50	
	195,50	
	192,50	

incl. adjustable flaps

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	350	>90	3
3000K	370	>90	5
1800-2850K	330	>90	9

2.0 LED

LED PCB 11W | phase-cut dim 220-240VAC | 50-60Hz
aluminium

IP20 L80|55K

	EUR	CODE
	216,00	
	219,00	
	219,00	
	219,00	
	219,00	
	216,00	

incl. adjustable flaps

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x440	>90	3
3000K	2x460	>90	5
1800-2850K	2x410	>90	9

1.0 QT14

QT14 max. 75W | G9
220-240VAC | 50-60Hz
aluminium

IP20

	EUR	CODE
	109,00	
	112,00	
	112,00	
	112,00	
	112,00	
	109,00	

OPTIONAL

flaps for adjustable beam angle

	EUR	CODE
	39,00	

QT14 3.5W | G9 | phase-cut dim clear

	EUR	CODE
2700K | 340lm	18,00	
3000K | 350lm	18,00	

LOXONE VERSIONS ONLINE

235
335
765
815
back



PRIVATE RESIDENCE | PROVENZANO ARCHITETTI ASSOCIATI GUILA LUPO ITALY







1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

	EUR	CODE
	67,00	
	68,00	
	67,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905

2.0

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

	EUR	CODE
	89,00	
	91,00	
	89,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905



PRIVATE RESIDENCE | MOOSEBERRY DESIGN GROUP UKRAINE

243
375 | 391
505 | 531

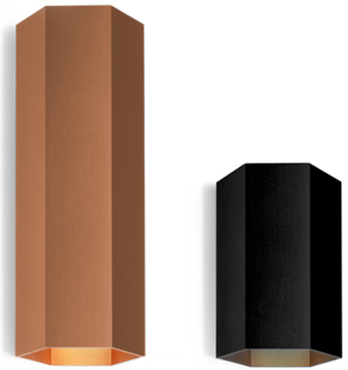





1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

	EUR	CODE
	68,00	
	68,00	
	68,00	
	67,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905

2.0

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

	EUR	CODE
	91,00	
	91,00	
	91,00	
	89,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905

back



PRIVATE RESIDENCE | DÉVÉ CREATIONS THE NETHERLANDS

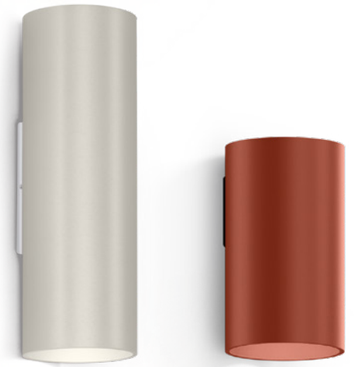

Wall surface


247


375 | 391


507 | 535





1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

	EUR	CODE
	67,00	
	68,00	
	68,00	
	68,00	
	68,00	
	68,00	
	68,00	
	68,00	
	67,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905

2.0

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20

	EUR	CODE
	88,00	
	91,00	
	91,00	
	91,00	
	91,00	
	91,00	
	91,00	
	91,00	
	88,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905



Wall surface









1.0 LED

LED PCB 6W | phase-cut dim 220-240VAC | 50-60Hz
aluminium

IP20 L80|55K

	EUR	CODE
	192,50	
	195,50	
	195,50	
	195,50	
	192,50	

incl. adjustable flaps

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	350	>90	3
3000K	370	>90	5
1800-2850K	330	>90	9

2.0 LED

LED PCB 11W | phase-cut dim 220-240VAC | 50-60Hz
aluminium

IP20 L80|55K

	EUR	CODE
	216,00	
	219,00	
	219,00	
	219,00	
	216,00	

incl. adjustable flaps

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x440	>90	3
3000K	2x460	>90	5
1800-2850K	2x410	>90	9

1.0 QT14

QT14 max. 75W | G9
220-240VAC | 50-60Hz
aluminium

IP20

	EUR	CODE
	109,00	
	112,00	
	112,00	
	112,00	
	109,00	

OPTIONAL

flaps for adjustable beam angle

	EUR	CODE
	39,00	

QT14 3.5W | G9 | phase-cut dim clear

	EUR	CODE
2700K | 340lm	18,00	
3000K | 350lm	18,00	

LOXONE VERSIONS ONLINE

251
341 | 377 | 393
537
759
805









1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 L80|60K

	EUR	CODE
	196,00	
	198,00	
	198,00	
	196,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	580	>90	3
3000K	620	>90	5

2.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 L80|60K

	EUR	CODE
	238,00	
	242,00	
	242,00	
	238,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x310	>90	3
3000K	2x330	>90	5

809

back



OFFICE CEEBE | WEYGERS HASSELT | BELGIUM

Wall surface







1.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 L80|60K

3000K | CRI >90 | 525lm

	EUR	CODE
	255,00	
	275,00	
	255,00	

2.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 L80|60K

3000K | CRI >90 | 2x320lm

	EUR	CODE
	295,00	
	325,00	
	295,00	

back









1.3

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 L80|60K

3000K | CRI >90 | 285lm

	EUR	CODE
	215,00	
	215,00	

3.6

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 L80|60K

3000K | CRI >90 | 285lm

	EUR	CODE
	298,00	
	298,00	

back



Wall surface





279

373

465

715 | 731

1.0

QT14 max. 5W | G9
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass
mirror thickness 3-6mm

IP44

69-71

	EUR	CODE
	145,00	

OPTIONAL

QT14 3.5W | G9 | phase-cut dim clear

	EUR	CODE
2700K | 340lm	18,00	
3000K | 350lm	18,00	

2.0

C35 max. 6W | E14
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass
mirror thickness 3-6mm

IP44

105-107

	EUR	CODE
	225,00	

OPTIONAL

C35 5.5W | E14 | phase-cut dim
opal

	EUR	CODE
2700K | 450lm	10,50	



RESTAURANT TRIANGOLO | CONIX COOL INTERIOR EDEGEM | BELGIUM

Wall surface

283

467

721 | 733







1.0

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | one side reflective
composite panel

IP20

	EUR	CODE
	208,00	
	208,00	
	208,00	
	208,00	

OPTIONAL

A60 5.5W | E27 | phase-cut dim
gold mirror

	EUR	CODE
2700K | 405lm	32,00	

A60 5.5W | E27 | phase-cut dim
silver mirror

	EUR	CODE
2700K | 405lm	32,00	

2.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | one side reflective
composite panel

IP20

	EUR	CODE
	256,00	
	256,00	
	256,00	
	256,00	

OPTIONAL

G95 5W | E27 | phase-cut dim
gold mirror

	EUR	CODE
2200K | 370lm	35,00	
2700K | 410lm	35,00	

G95 5W | E27 | phase-cut dim
silver mirror

	EUR	CODE
2700K | 395lm	35,00	

3.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | one side reflective
composite panel

IP20

	EUR	CODE
	416,00	
	416,00	
	416,00	
	416,00	

OPTIONAL

G95 5W | E27 | phase-cut dim
gold mirror

	EUR	CODE
2200K | 370lm	35,00	
2700K | 410lm	35,00	

G95 5W | E27 | phase-cut dim
silver mirror

	EUR	CODE
2700K | 395lm	35,00	





▶ **DESIGN WITH LOVE**



RESTAURANT EN VRAC MOUSCRON | BELGIUM

Wall surface





2.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | PET felt material
noise absorbing material

IP20

	EUR	CODE
	256,00	
	256,00	
	256,00	
	256,00	

OPTIONAL

G95 5W | E27 | phase-cut dim
gold mirror

	EUR	CODE
2200K | 370lm	35,00	
2700K | 410lm	35,00	

G95 5W | E27 | phase-cut dim
silver mirror

	EUR	CODE
2700K | 395lm	35,00	

G95 5.5W | E27 | phase-cut dim | opal

	EUR	CODE
2700K | 1060lm	33,00	

G95 4.5W | E27 | phase-cut dim | clear

	EUR	CODE
2700K |375lm	33,00	

3.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium |PET felt material
noise absorbing material

IP20

	EUR	CODE
	416,00	
	416,00	
	416,00	
	416,00	

OPTIONAL

G95 5W | E27 | phase-cut dim
gold mirror

	EUR	CODE
2200K | 370lm	35,00	
2700K | 410lm	35,00	

G95 5W | E27 | phase-cut dim
silver mirror

	EUR	CODE
2700K | 395lm	35,00	

G95 5.5W | E27 | phase-cut dim | opal

	EUR	CODE
2700K | 1060lm	33,00	

G95 4.5W | E27 | phase-cut dim | clear

	EUR	CODE
2700K |375lm	33,00	



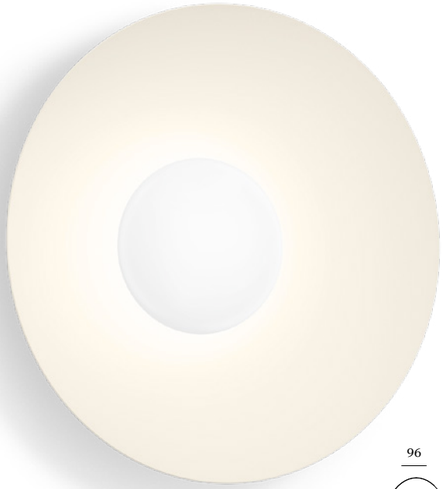







1.0

LED COB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white opal glass hand blown

IP20 L80|50K

	EUR	CODE
	287,00	
	309,00	
	309,00	
	309,00	
	287,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	575	>90	3
3000K	610	>90	5

2.0

LED COB 11W| phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white opal glass hand blown

IP20 L80|50K

	EUR	CODE
	427,00	
	459,00	
	459,00	
	459,00	
	427,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	575	>90	3
3000K	610	>90	5

3.0

LED COB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white opal glass hand blown

IP20 L80|50K

	EUR	CODE
	547,00	
	581,00	
	581,00	
	581,00	
	547,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	565	>90	3
3000K	600	>90	5

287
557
back



MERCURE CHANTILLY | PROJECT MANAGED BY ATYPIO HOTELS RESORTS WITH ABP ARCHITECTS | L'OBSERVATOIRE DE LA NUIT
VINEUIL-SAINT-FIRMIN | FRANCE

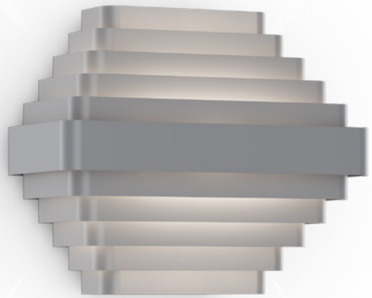

Wall surface

289

479



01

2x A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium

IP20

	EUR	CODE
	685,00	
	685,00	

OPTIONAL

A60 3.8W | E27 | phase-cut dim
gold tinted

	EUR	CODE
2200K | 245lm	31,00	

A60 5.6W | E27 | phase-cut dim | clear

	EUR	CODE
2700K | 480lm	31,00	





Wall surface



289



479



02

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium

IP20

	EUR	CODE
	425,00	
	425,00	
	425,00	

OPTIONAL

A60 3.8W | E27 | phase-cut dim
gold tinted

	EUR	CODE
2200K | 245lm	31,00	

A60 5.6W | E27 | phase-cut dim | clear

	EUR	CODE
2700K | 480lm	31,00	





KVÄNUM KITCHEN | KVÄNUM DESIGN STUDIO COPENHAGEN | DENMARK

reddot award 2019
winner lighting design



1.1

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-45°

	EUR	CODE
	243,00	
	238,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 440lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905



3.1

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel
cable plug with hand switch

IP20 0°-45°|0°-30°

	EUR	CODE
	355,00	
	350,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 440lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905



3.1

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel
cable base round

IP20 0°-45°|0°-30°

	EUR	CODE
	349,00	
	344,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 440lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905




BF2


BK3


BB4

reddot award 2019
winner lighting design

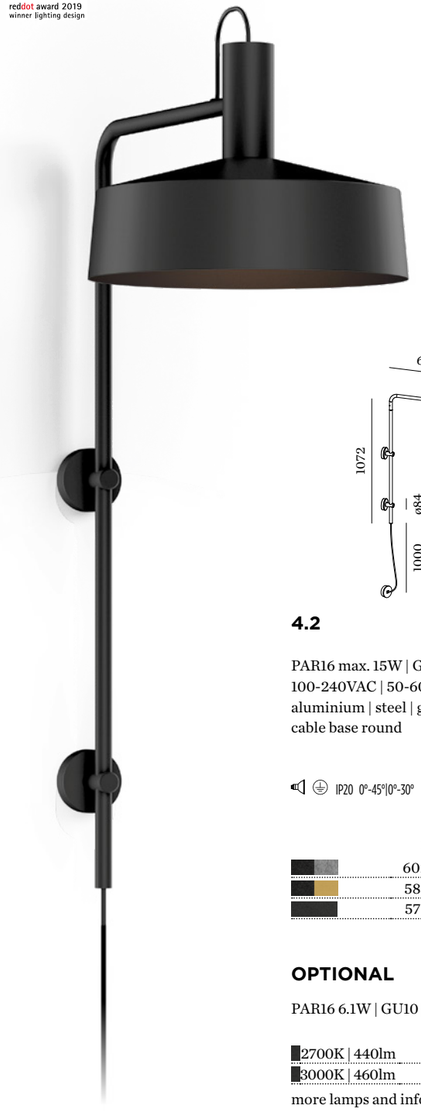

Wall surface



4.2

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel | grey felt
cable base round

IP20 0°-45°|0°-30°

	EUR	CODE
	602,00	
	583,00	
	575,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 440lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905



4.3

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel | grey felt
cable base round

IP20 0°-45°|0°-30°

	EUR	CODE
	679,00	
	668,00	
	655,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 440lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905



4.4

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel
cable base round

IP20 0°-45°|0°-30°

	EUR	CODE
	721,00	
	709,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 440lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905


495




725 | 735



PRIVATE RESIDENCE | MAADSTUDIO MAREK SVOBODA CZECH REPUBLIC

Wall surface





2.1

LED TUBE 10W | non dim
220-240VAC | 50-60Hz
aluminium
black textile cable plug with switch

IP20 L70|75K

3000K | CRI >80 | 1530lm

	EUR	CODE
	257,00	



3.1

LED TUBE 14W | non dim
220-240VAC | 50-60Hz
aluminium
black textile cable plug with switch

IP20 L70|75K

3000K | CRI >80 | 2300lm

	EUR	CODE
	262,00	



4.1

LED TUBE 23W | non dim
220-240VAC | 50-60Hz
aluminium
black textile cable plug with switch

IP20 L70|60K

	EUR	CODE
	266,00	

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	3560	>80	4
4000K	3950	>80	6



4.2

LED TUBE 23W | phase-cut dim
220-240VAC | 50-60Hz
aluminium
black textile cable plug with dimmer switch

IP20 L70|50K

	EUR	CODE
	325,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2780	>90	3
3000K	2940	>90	5

ARCHITECT | PHILIPP WEINBERGER & STUDIO MARCH GUT

back



PATISSERIE BRAASKMA LEEUWARDEN | THE NETHERLANDS

TUNE UP YOUR HEART PROJECT



PRIVATE RESIDENCE | SERBOLI BUREAU SPAIN

CHRISTOPHE GEVERS

Wall surface





2P SMALL

QT14 2x max. 4W | G9
220-240VAC | 50-60Hz
steel

IP20

	EUR	CODE
	238,00	
	245,00	
	245,00	
	245,00	
	238,00	

OPTIONAL

QT14 3.5W | G9 | phase-cut dim clear

	EUR	CODE
2700K | 340lm	18,00	
3000K | 350lm	18,00	

2G BIG

A60 2x max. 12W | E27
220-240VAC | 50-60Hz
steel

IP20

	EUR	CODE
	295,00	
	310,00	
	310,00	
	310,00	
	295,00	

OPTIONAL

A60 5.6W | E27 | phase-cut dim | clear

	EUR	CODE
2700K | 480m	31,00	



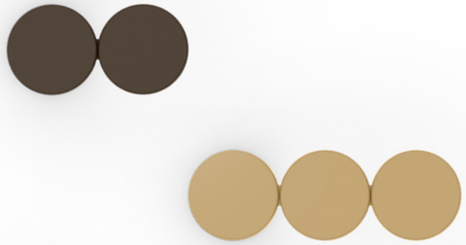









2.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PC cover

IP20 L80|55K

	EUR	CODE
	155,00	
	155,00	
	155,00	
	155,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	420	>90	3
3000K	435	>90	5

3.0

LED COB 16W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PC cover

IP20 L80|55K

	EUR	CODE
	215,00	
	215,00	
	215,00	
	215,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x395	>90	3
3000K	2x425	>90	5

4.0

LED COB 22W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium |PC cover

IP20 L80|55K

	EUR	CODE
	285,00	
	285,00	
	285,00	
	285,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	3x400	>90	3
3000K	3x405	>90	5

back



PRIVATE RESIDENCE | UNIQUE RENOVATIONS BELGIUM

CREATE YOUR OWN TAPIS

Wall surface





1.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
composite | aluminium

IP20 L80|50K

	EUR	CODE
	258,00	
	258,00	
	258,00	
	238,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	450	>90	3
3000K	480	>90	5

back



PRIVATE RESIDENCE | STUDIO 05 BELGIUM



EOAK FLOORS SHOWROOM | VIGONARCHITECTS HANOI | VIETNAM

CREATE YOUR OWN TAPIS



DAS SEEHÄUSER | WOODSPACE MATTSEE | AUSTRIA

Wall surface



2.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
composite | aluminium

IP20 L80|50K

	EUR	CODE
	266,00	
	266,00	
	266,00	
	253,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	465	>90	3
3000K	500	>90	5



3.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
composite | aluminium

IP20 L80|50K

	EUR	CODE
	277,00	
	277,00	
	277,00	
	261,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	465	>90	3
3000K	500	>90	5



2.1

composite | aluminium

	EUR	CODE
	237,00	
	237,00	
	237,00	
	224,00	



3.1

composite | aluminium

	EUR	CODE
	248,00	
	248,00	
	248,00	
	232,00	

back



HAIDRESSER JANSEN KAPPERS | EMPOWER SPACES BEEK EN DONK | THE NETHERLANDS

mixology winner

Wall surface



1.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PET felt material
noise absorbing material

IP20 L80|50K

	EUR	CODE
	398,00	
	398,00	
	398,00	
	398,00	
	398,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	410	>90	3
3000K	435	>90	5



2.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PET felt material
noise absorbing material

IP20 L80|50K

	EUR	CODE
	285,00	
	285,00	
	285,00	
	285,00	
	285,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	440	>90	3
3000K	470	>90	5



2.1

aluminium | PET felt material
noise absorbing material

	EUR	CODE
	256,00	
	256,00	
	256,00	
	256,00	
	256,00	

back





RESTAURANT L'APERICENA TIME | ARCH. LEONARDO PORCELLI - STILEMI RIVAROLO CANAVESE | ITALY





3.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PET felt material
noise absorbing material

IP20 L80|50K

	EUR	CODE
	299,00	
	299,00	
	299,00	
	299,00	
	299,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	440	>90	3
3000K	470	>90	5



4.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PET felt material
noise absorbing material

IP20 L80|50K

	EUR	CODE
	299,00	
	299,00	
	299,00	
	299,00	
	299,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	440	>90	3
3000K	470	>90	5



3.1

aluminium | PET felt material
noise absorbing material

	EUR	CODE
	270,00	
	270,00	
	270,00	
	270,00	
	270,00	



4.1

aluminium | PET felt material
noise absorbing material

	EUR	CODE
	270,00	
	270,00	
	270,00	
	270,00	
	270,00	



PRIVATE RESIDENCE | AJ ARCHITECTEN BELGIUM

Wall surface

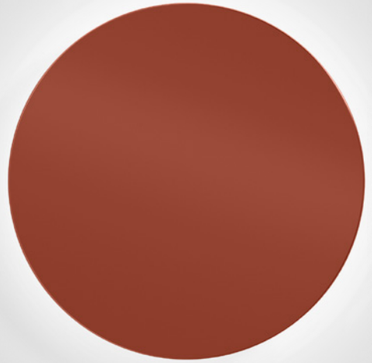







2.0 ROUND

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP20 L80|60K

		EUR	CODE
		258,00	
		260,00	
		260,00	
		260,00	
		260,00	
		268,00	
		268,00	
		268,00	
		257,00	
	marble	323,00	317578MW_
	marble	323,00	317578MB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	610	>90	3
3000K	620	>90	5

3.0 ROUND

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP20 L80|60K

		EUR	CODE
		293,00	
		297,00	
		297,00	
		297,00	
		297,00	
		304,00	
		304,00	
		304,00	
		293,00	
	marble	347,00	317778MW_
	marble	347,00	317778MB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	610	>90	3
3000K	620	>90	5





back







PRIVATE RESIDENCE | UP FOR GRABS INTERIORS UNITED KINGDOM

Wall surface





2.0 CARRÉ

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP20 L80|60K

		EUR	CODE
		268,00	
		270,00	
		270,00	
		270,00	
		270,00	
		268,00	
	marble	334,00	
	marble	334,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	610	>90	3
3000K	620	>90	5

3.0 CARRÉ

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP20 L80|60K

		EUR	CODE
		304,00	
		308,00	
		308,00	
		308,00	
		308,00	
		304,00	
	marble	359,00	
	marble	359,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	610	>90	3
3000K	620	>90	5



back





9.0

LED PCB 31W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP20 L80|60K

	EUR	CODE
	358,00	
	363,00	
	358,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1540	>90	3
3000K	1560	>90	5



12.0

LED PCB 38W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP20 L80|60K

	EUR	CODE
	428,00	
	436,00	
	428,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2110	>90	3
3000K	2130	>90	5



back





1.0

LED TUBE 7W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal glass

IP20 L70|15K

	EUR	CODE
	118,00	
	118,00	
	118,00	
	118,00	
	118,00	
	118,00	
	118,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	700	>90	3
3000K	720	>90	5



2.0

LED TUBE 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal glass

IP20 L70|15K

	EUR	CODE
	139,00	
	139,00	
	139,00	
	139,00	
	139,00	
	139,00	
	139,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	800	>90	3
3000K	820	>90	5

back



OFFICE COPTHALL BRIDGE HOUSE | EKHO STUDIO HARROGATE | UNITED KINGDOM

DESIGN AWARD 2024

reddot winner 2023

Wall surface

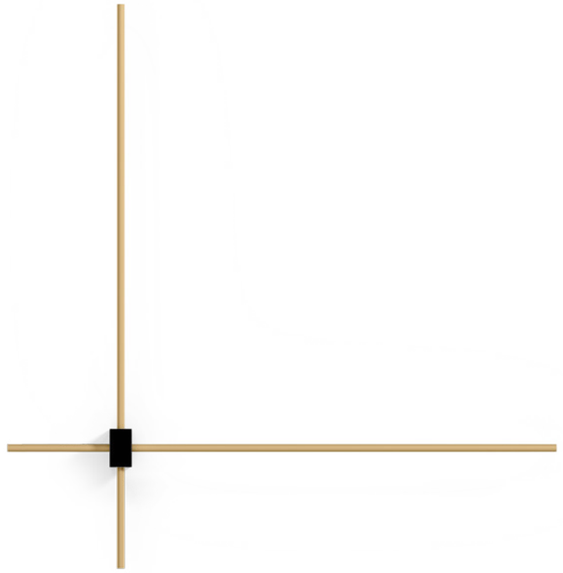





1.0

LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser

IP20 L80|50K

	EUR	CODE
	235,00	
	235,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	450	>90	3
3000K	485	>90	5

4.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser

IP20 L80|50K

	EUR	CODE
	325,00	
	325,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	895	>90	3
3000K	965	>90	5

OPTIONAL

spacer 10mm for overlapping

	EUR	CODE
	31,00	

specs on page 911



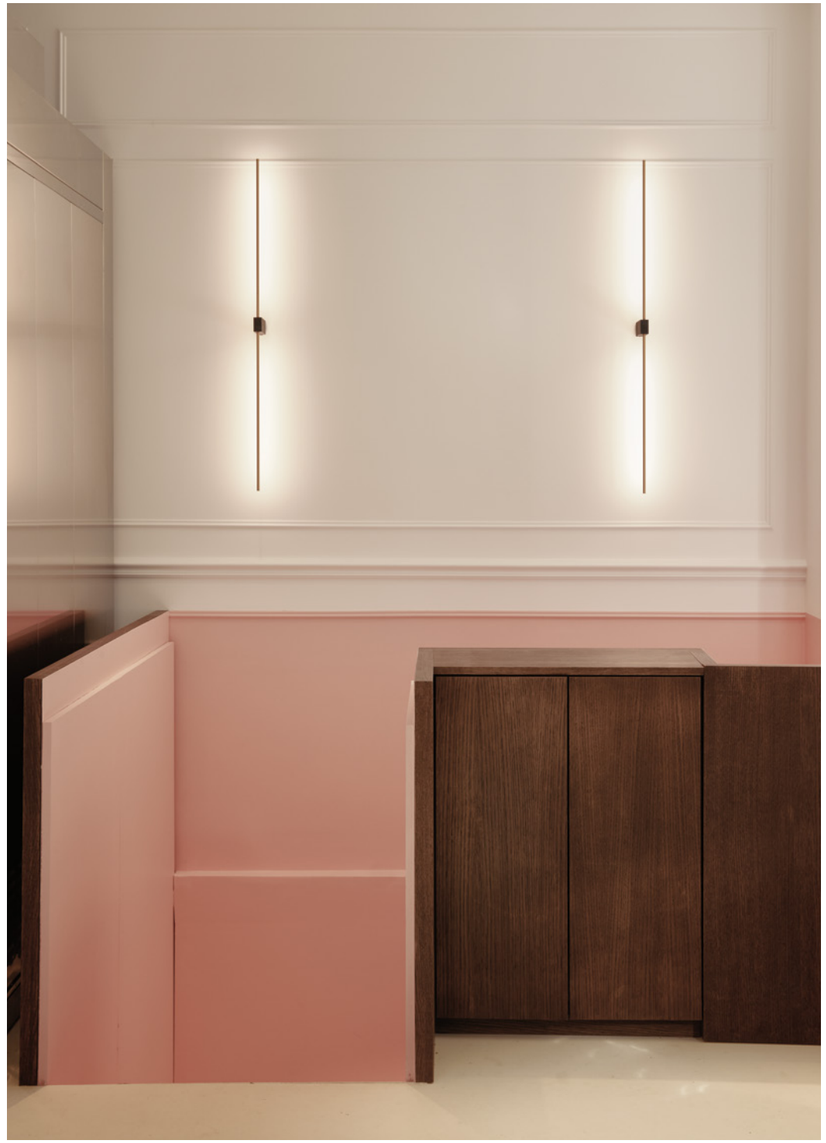

PASTRY SHOP DONATIEN MAÎTRE ECLAIR | STUDIO CARRÉ – PAUL LEVAILLANT PARIS | FRANCE

DESIGN AWARD 2024

reddot winner 2023



Wall surface





2.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser

IP20 L80|50K

	EUR	CODE
	295,00	
	295,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	895	>90	3
3000K	965	>90	5

3.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser

IP20 L80|50K

	EUR	CODE
	335,00	
	335,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	895	>90	3
3000K	965	>90	5

OPTIONAL

spacer 10mm for overlapping

	EUR	CODE
	31,00	

specs on page 911

back



reddot winner 2023

263
433
727



1.0 ROUND

LED PCB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser

IP20 L80|50K

	EUR	CODE
	335,00	
	335,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1180	>90	3
3000K	1280	>90	5



OPTIONAL

spacer 10mm for overlapping

	EUR	CODE
	31,00	

specs on page 911

back



reddot winner 2024

Wall surface

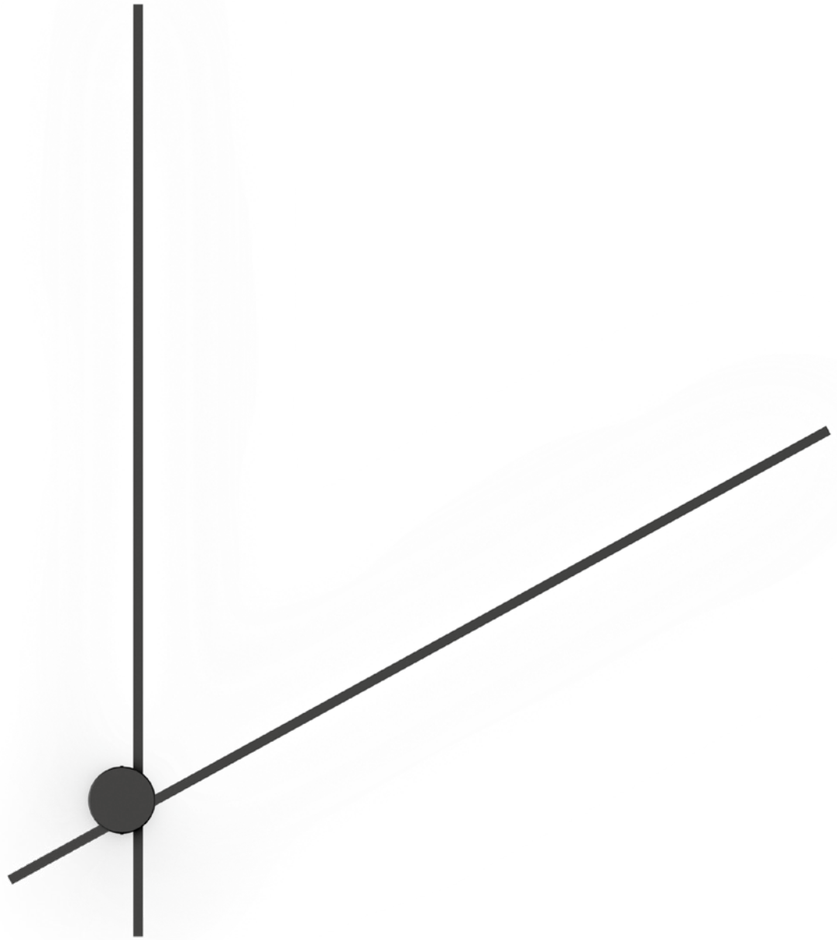





1.0

LED PCB 24W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | indir. light

IP20 180° L80|100K

2700K | CRI >90 | 2x905lm

	EUR	CODE
	425,00	

267

441

back



PRIVATE RESIDENCE | STUDIO PALINPERÄ OY FINLAND

Wall surface

277

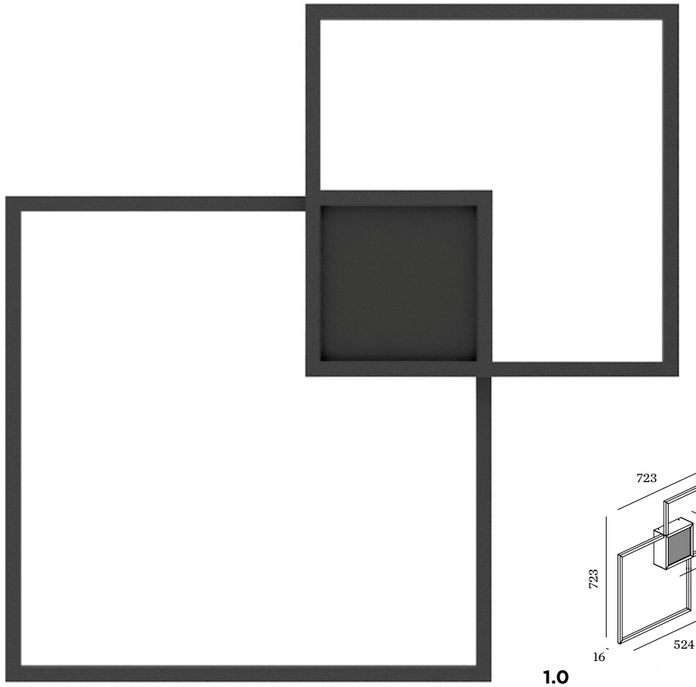

1.0

LED PCB 42W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA cover
indirect light

IP20 L70|55K

	EUR	CODE
	680,00	
	680,00	
	680,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	3410	>90	3
3000K	3510	>90	5



2.0

LED PCB 49W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA cover dir./
indirect light

IP20 L70|55K

	EUR	CODE
	770,00	
	770,00	
	770,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	480/3920	>90	3
3000K	495/4035	>90	5

CREATE YOUR OWN VENN

S&R CORNELISSEN

back



PRIVATE RESIDENCE AUSTRIA

reddot winner 2023



Wall surface 61 | 137 | 153

193

329 | 347

415 | 509

571

723 | 729



1.0

LED COB 5W
220-240VAC | 50-60Hz | incl. driver
aluminium
incl. switch on/off

IP20 0°-90°|350° M-30° L80|50K

	EUR	CODE
	198,00	
	198,00	
	198,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	330	>90	3
3000K	345	>90	5

back



199
333

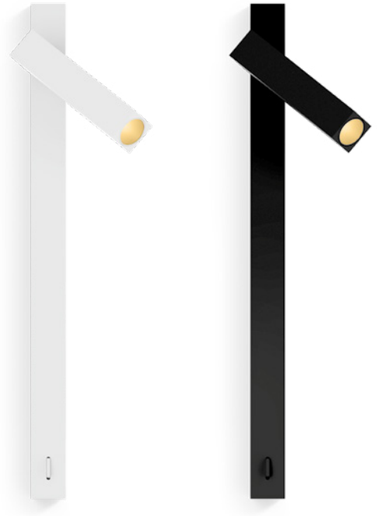



1.0

LED COB 8W
220-240VAC | 50-60Hz | incl. driver
aluminium
incl. switch on/off

IP20 0°-90°|350° M-23° L80|50K



	EUR	CODE
	295,00	
	295,00	

LIGHT COLOUR	LUMEN|CRI	CODE
2700K	185|>90	3
3000K	200|>90	5



PRIVATE RESIDENCE | IN-BETWEEN ARCHITECTS LIMITED HONG KONG











1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
incl. switch on/off

IP20 0°-90°|330°

	EUR	CODE
	155,00	
	159,00	
	159,00	
	155,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905

back













1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-90°|350° M-23° L80|50K

	EUR	CODE
	268,00	
	268,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	235	>90	3
3000K	245	>90	5

2.0

LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-90°|350° M-23° L80|50K

	EUR	CODE
	345,00	
	345,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x215	>90	3
3000K	2x225	>90	5





Wall surface



1.0

LED PCB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 L80|60K

	EUR	CODE
	269,00	
	269,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1180	>80	2
3000K	1190	>80	4



Wall surface



1.0

LED PCB 25W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PC cover

IP20 L80|50K

	EUR	CODE
	226,00	
	229,00	
	226,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1830	>90	3
3000K	1910	>90	5

back







1.0

LED COB 9W | dimmable
220-240VAC | 50-60Hz | incl. driver
glass | aluminium

IP20 L80|50K

phase-cut dim

	EUR	CODE
	268,00	
	268,00	
	268,00	
	268,00	
	268,00	
	268,00	
	268,00	
	268,00	

DALI-2

	EUR	CODE
	298,00	
	298,00	
	298,00	
	298,00	
	298,00	
	298,00	
	298,00	
	298,00	

LIGHT COLOUR	LUMEN | CRI	CODE
2700K	420 | >90	3
3000K	440 | >90	5







Wall surface

169

271 | 275 | 295







1.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal glass
mirror thickness 3-6mm

IP44 L80|50K

50-52

	EUR	CODE
	188,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	520	>95	3
3000K	550	>95	5
4000K	580	>95	7

2.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal glass
mirror thickness 3-6mm

IP44 L80|50K

50-52

	EUR	CODE
	198,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	600	>95	3
3000K	630	>95	5
4000K	665	>95	7

3.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal glass
mirror thickness 3-6mm

IP44 L80|50K

50-52

	EUR	CODE
	218,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	645	>95	3
3000K	665	>95	5
4000K	705	>95	7

back



PRIVATE RESIDENCE GREECE

Wall surface



169



271 | 275 | 295



1.0 CLIP

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal glass
mirror thickness 2-7mm
slides over the mirror

IP44 L80|50K

	EUR	CODE
	195,00	

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	550	>95	5
4000K	580	>95	7



2.0 CLIP

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal glass
mirror thickness 2-7mm
slides over the mirror

IP44 L80|50K

	EUR	CODE
	205,00	

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	630	>95	5
4000K	665	>95	7



3.0 CLIP

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal glass
mirror thickness 2-7mm
slides over the mirror

IP44 L80|50K

	EUR	CODE
	215,00	

LIGHT COLOUR	LUMEN	CRI	CODE
3000K	665	>95	5
4000K	705	>95	7



back



PRIVATE RESIDENCE | RAUMTAKT GMBH SWITZERLAND

Wall surface



1.0

LED PCB 4/6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA
output selector

IP44 L80|50K

	EUR	CODE
	198,00	
	198,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	L 375/H 645	>90	3
3000K	L 395/H 670	>90	5



2.0

LED PCB 6/9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA
output selector

IP44 L80|50K

	EUR	CODE
	238,00	
	238,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	L 535/H 920	>90	3
3000K	L 575/H 960	>90	5



3.0

LED PCB 8/12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA
output selector

IP44 L80|50K

	EUR	CODE
	275,00	
	275,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	L 730/H 1290	>90	3
3000K	L 770/H 1350	>90	5



back



Wall surface







1.0

LED PCB 5/7W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA
output selector

IP44 L80|60K

	EUR	CODE
	245,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	255/420	>90	3
3000K	265/435	>90	5

2.0

LED PCB 8/13W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA
output selector

IP44 L80|60K

	EUR	CODE
	365,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	445/815	>90	3
3000K	460/840	>90	5

3.0

LED PCB 13/19W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA
output selector

IP44 L80|60K

	EUR	CODE
	675,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	735/1220	>90	3
3000K	755/1250	>90	5



back







1.0

LED PCB 5W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | ribbed glass

IP65 L80|100K

3000K | CRI >90 | 425lm

	EUR	CODE
	325,00	
	325,00	
	325,00	

825

867



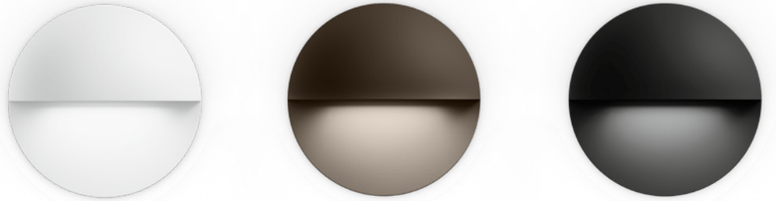



1.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|100K

3000K | CRI >90 | 525lm

	EUR	CODE
	185,00	
	185,00	
	185,00	

831

Table | Floor

TABLE



715



717



719



721



723



725

FLOOR



715



727



729



731



733



735



APT GRAND KOLIBA | SALPIETRA & GAJDOS ARCHITECTS SLOVAKIA

Table / Floor

279
373
465
623



1.0

QT14 max. 5W | G9
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass
cable plug with switch

IP20

	EUR	CODE
	185,00	

OPTIONAL

QT14 3.5W | G9 | phase-cut dim clear

	EUR	CODE
2700K | 340lm	18,00	
3000K | 350lm	18,00	



2.0

C35 max. 6W | E14 | dimmable
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass
cable plug with dimmer switch

IP20

	EUR	CODE
	265,00	

OPTIONAL

C35 5.5W | E14 | phase-cut dim
opal

	EUR	CODE
2700K | 450lm	10,50	



3.0

A60 max. 12W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass
cable plug with dimmer switch

IP20

	EUR	CODE
	345,00	

OPTIONAL

A60 9W | E27 | phase-cut dim
opal

	EUR	CODE
2700K | 800lm	14,50	







2.0

C35 max. 6W| E14 | dimmable
220-240VAC | 50-60Hz
aluminium | steel
artisanal Italian hand blown glass
cable plug with dimmer switch

IP20

	EUR	CODE
	355,00	

OPTIONAL

C35 5.5W | E14 | phase-cut dim | opal

	EUR	CODE
2700K | 450lm	10,50	



3.0

A60 max. 12W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium | steel
artisanal Italian hand blown glass
cable plug with dimmer switch

IP20

	EUR	CODE
	455,00	

OPTIONAL

A60 9W | E27 | phase-cut dim | opal

	EUR	CODE
2700K | 800lm	14,50	



PRIVATE RESIDENCE BELGIUM



CHRISTOPHE GEVERS

back



CG01

T25 max. 6W | E14
220-240VAC | 50-60Hz
steel
cable plug with dimmer switch

IP20

	EUR	CODE
	980,00	
	980,00	
	980,00	
	980,00	
	980,00	

OPTIONAL

T25-85 5W | E14 | phase-cut dim
gold tinted

	EUR	CODE
2200K | 460lm	29,00	
2500K | 480lm	29,00	
2700K | 500lm	29,00	







1.0

A60 max. 15W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium | steel | one side reflective composite panel
cable plug with dimmer switch

IP20

	EUR	CODE
	295,00	
	295,00	
	295,00	
	295,00	

OPTIONAL

A60 5.5W | E27 | phase-cut dim
gold mirror

	EUR	CODE
2700K | 405lm	32,00	

A60 5.5W | E27 | phase-cut dim
silver mirror

	EUR	CODE
2700K | 405lm	32,00	

283
467
625

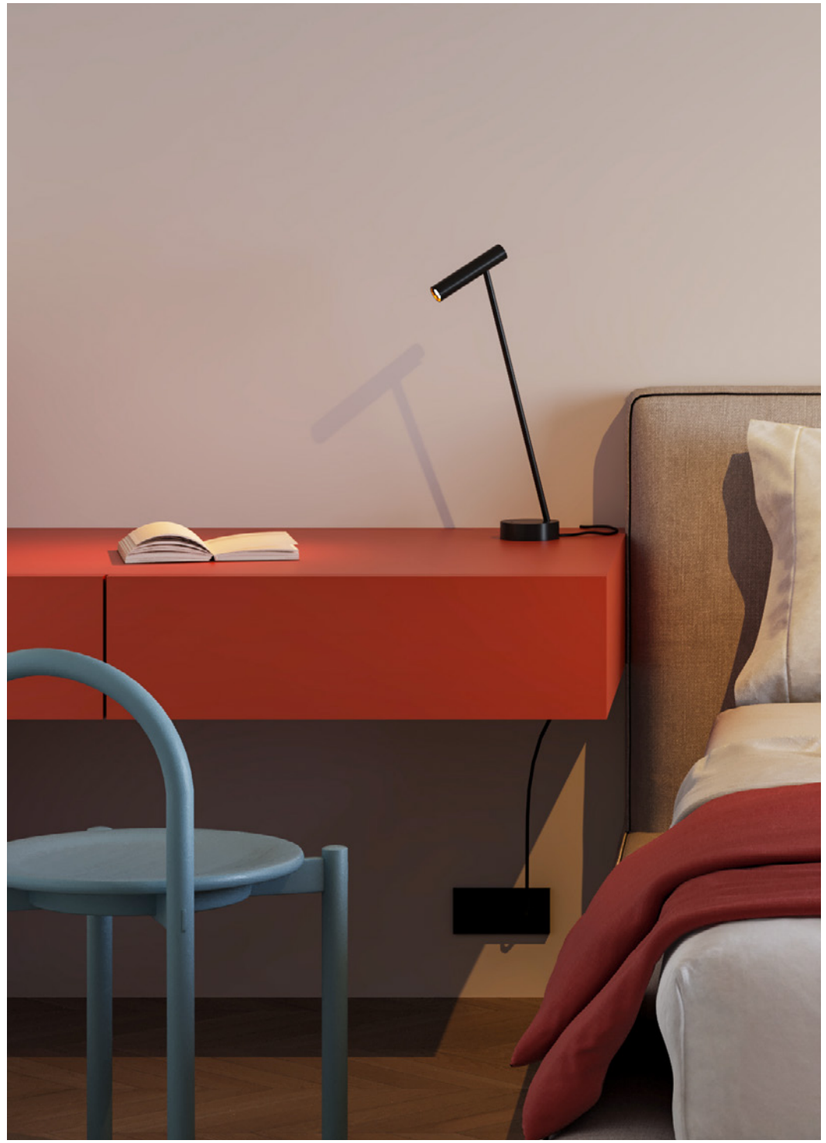





1.0

LED COB 8W | dimmable
220-240VAC | 50-60Hz | incl. driver
aluminium
incl. switch on / off | push dim
incl. USB-C port

IP20 45°|0°-145° M-30° L80|50K

2700K | CRI >90 | 505lm

	EUR	CODE
	275,00	
	275,00	

back

Table 61 | 137 | 153
193
329 | 347
415 | 509
571
589 | 685



HOTEL LOPESAN | EMILIO PELLEJERO FARO | SPAIN

reddot award 2019
winner lighting design











back



1.1

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel
cable plug with hand switch
CH and UK variants online

IP20 0°-45°|0°-30°

	EUR	CODE
	262,00	
	262,00	
	262,00	
	257,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 445lm	16,50	
2700K | 440lm	16,50	
3000K | 465lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905



Floor

263

433

673 | 679





back



1.0

LED PCB 16W | dimmable
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser
cable plug with dimmer switch

IP20 0°-10°|360° L80|50K

2700K | CRI >90 | 1360lm

	EUR	CODE
	395,00	
	395,00	



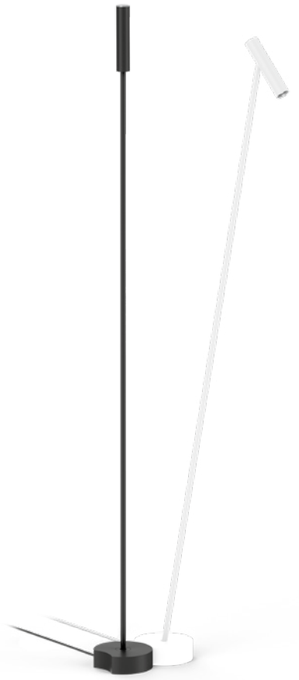





back

Floor 61 | 137 | 153

193

329 | 347

415 | 509

571

589 | 685



1.0

LED COB 8W | dimmable
220-240VAC | 50-60Hz | incl. driver
aluminium
integrated dimmer button

IP20 0°-10°|360°|0°-145° M-30° L80|50K

2700K | CRI >90 | 505lm

	EUR	CODE
	325,00	
	325,00	



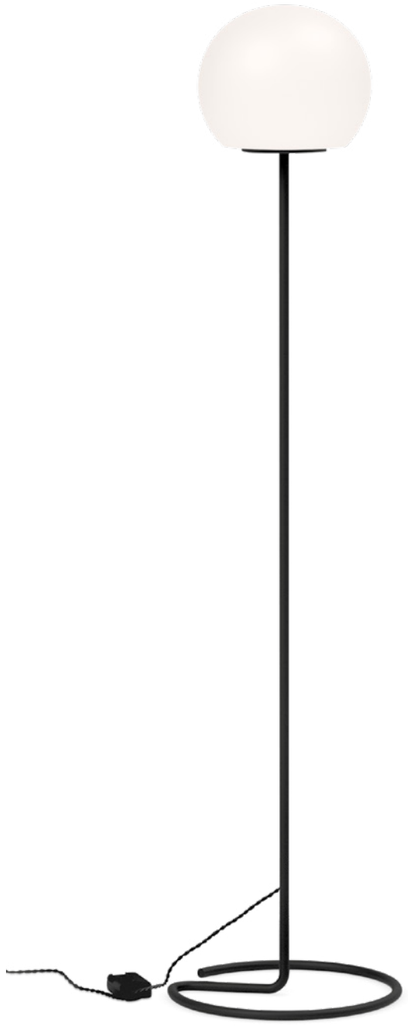

Floor

279

373

465

623



3.0

A60 max. 12W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium | steel
artisanal Italian hand blown glass
cable plug with dimmer switch

IP20

	EUR	CODE
	595,00	

OPTIONAL

A60 9W | E27 | phase-cut dim | opal

	EUR	CODE
2700K | 800lm	14,50	







2.0

G95 max. 15W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium | steel | one side reflective composite panel
cable plug with dimmer switch

IP20

	EUR	CODE
	427,00	
	427,00	
	427,00	
	427,00	

OPTIONAL

G95 5W | E27 | phase-cut dim
gold mirror

	EUR	CODE
2200K | 370lm	35,00	
2700K | 410lm	35,00	

G95 5W | E27 | phase-cut dim
silver mirror

	EUR	CODE
2700K | 955lm	35,00	



3.0

G95 max. 15W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium | steel | one side reflective composite panel
cable plug with dimmer switch

IP20

	EUR	CODE
	587,00	
	587,00	
	587,00	
	587,00	

OPTIONAL

G95 5W | E27 | phase-cut dim
gold mirror

	EUR	CODE
2200K | 370lm	35,00	
2700K | 410lm	35,00	

G95 5W | E27 | phase-cut dim
silver mirror

	EUR	CODE
2700K | 955lm	35,00	



BV PARSHIP | JOPPICH & RIECKHOFF | SEEL BOBSIN PARTNER HAMBURG | GERMANY

reddot award 2019
winner lighting design

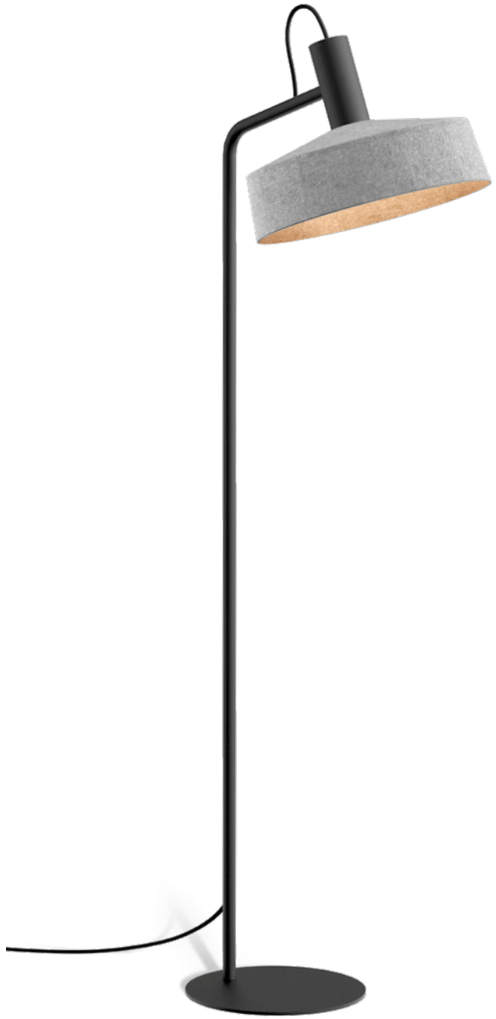



1.2

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel | grey felt
cable with floor switch
CH and UK variants online

IP20 0°-45°|0°-30°

	EUR	CODE
	502,00	
	483,00	
	475,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 440lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905



1.3

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel | grey felt
cable with floor switch
CH and UK variants online

IP20 0°-45°|0°-30°

	EUR	CODE
	579,00	
	568,00	
	555,00	

OPTIONAL

PAR16 6.1W | GU10 | phase-cut dim

	EUR	CODE
2700K | 440lm	16,50	
3000K | 460lm	16,50	

more lamps and info on page 905

outdoor

Ceiling recessed

738 – 749

RECESSED



741



743



745



747



749

back



PRIVATE RESIDENCE | MINDAUGAS LELIŪGA LITHUANIA









1.0

LED COB 4W | 500mA | 8V
aluminium

IP65 M-30° L80|55K

wire springs 50-52 85 4-25

	EUR	CODE
	69,50	
	69,50	
	69,50	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	470	>90	3
3000K	495	>90	5



ALWAYS USE

driver | IP67

	EUR	CODE
7W | 500mA	46,50	

more options and specs on page 899

MORE VERSIONS ONLINE

back



PRIVATE RESIDENCE GREECE









Outdoor
Ceiling recessed

1.0

LED COB 6W | 350mA | 17V
aluminium

IP65 M-31° L80|50K

wire springs 68-70 85 4-25

	EUR	CODE
	96,00	
	96,00	
	96,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	590	>90	3
3000K	610	>90	5

ALWAYS USE

driver | 350mA | IP68

	EUR	CODE
17W	69,00	

more options and specs on page 897



back











73

ø95

1.0

LED COB 6/9W | 350/500mA | 17V
aluminium

IP65 M-33° L80|55K

wire springs 86-89 85 4-27

	EUR	CODE
	109,00	
	109,00	
	109,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	485/640	>90	3
3000K	510/690	>90	5

ALWAYS USE

driver | IP68

	EUR	CODE
17W | 350mA	69,00	
24W | 500mA	74,00	

more options and specs on page 897

MORE VERSIONS ONLINE

IC rated









Outdoor
Ceiling recessed



ø77

1.0

LED COB 6/9W | 350/500mA | 18V
aluminium
opal glass convex lens

IP65 W-105° L80|55K g

wire springs 68-73 80 4-27

	EUR	CODE
	95,00	
	95,00	
	95,00	
	95,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	340/455	>90	3
3000K	370/495	>90	5

ALWAYS USE

driver | IP68

	EUR	CODE
17W | 350mA	69,00	
24W | 500mA	74,00	

more options and specs on page 897



back



PRIVATE RESIDENCE | KILLIAN GARTNER AUSTRIA



Outdoor
Ceiling recessed





1.0 OPAL

LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | polyamide
opal PMMA cover

IP65 L70|60K

blade springs 76-79 70 min. 8

3000K | CRI >90 | 410lm

	EUR	CODE
	135,00	
	135,00	
	135,00	

2.0 SPOT

LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | polyamide
clear lens

IP65 W-45° L70|50K

blade springs 76-79 70 min. 8

3000K | CRI >90 | 560lm

	EUR	CODE
	135,00	
	135,00	
	135,00	

back

Ceiling surface / suspended

SURFACE



753



755



757



759



761



763



765



767



767



769



771



775

SUSPENDED



777

back



PRIVATE RESIDENCE | ATELIER B AUSTRIA



Outdoor
Ceiling surface



1.0

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 M-36° L70|55K

3000K | CRI >90 | 555lm

	EUR	CODE
	142,00	
	142,00	
	142,00	
	142,00	

797

back

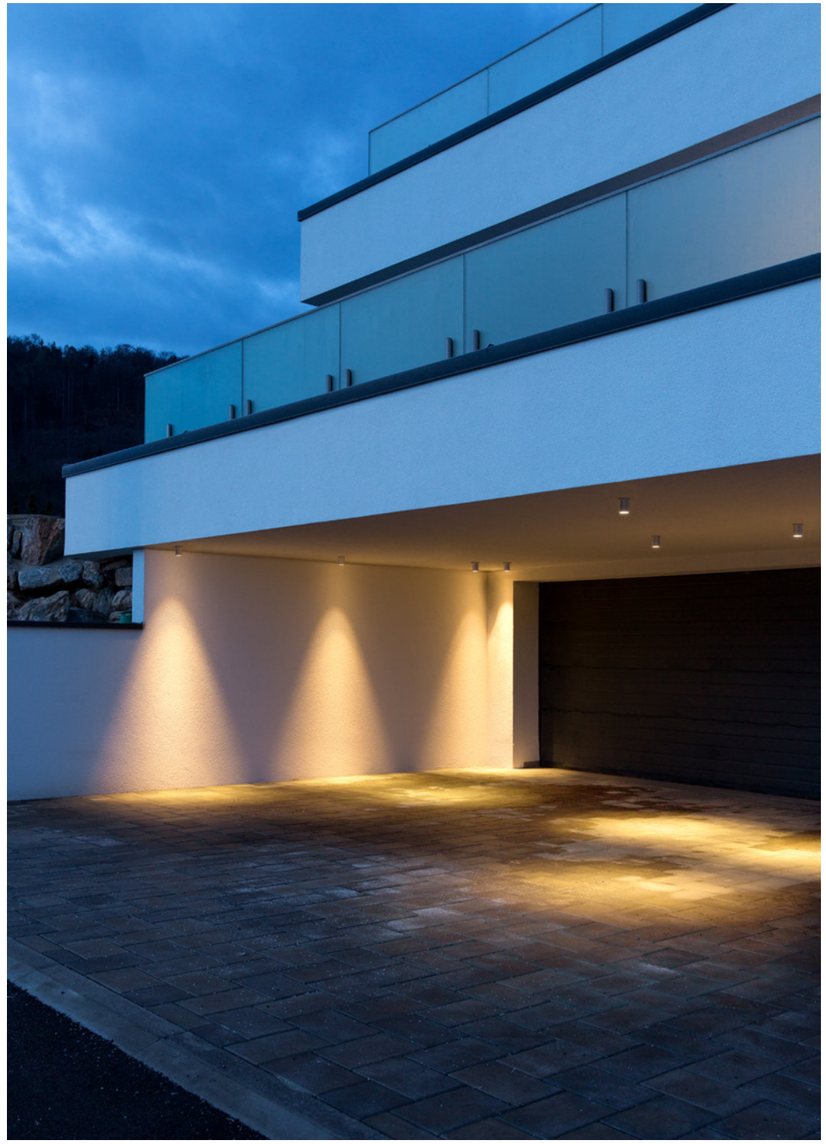

PRIVATE RESIDENCE AUSTRIA

Outdoor
Ceiling surface







1.0 LED

LED COB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 M-36° L80|60K

3000K | CRI >90 | 620lm

	EUR	CODE
	208,00	
	208,00	
	208,00	
	208,00	

1.0 PAR16

PAR16 max. 5W | GU10
100-240VAC | 50-60Hz
aluminium

IP65

	EUR	CODE
	118,00	
	118,00	
	118,00	
	118,00	
	118,00	

OPTIONAL

PAR16 3.7W | GU10

	EUR	CODE
2700K | 350lm	13,00	
3000K | 350lm	13,00	

799

back



PRIVATE RESIDENCE BELGIUM



Outdoor
Ceiling surface



1.0

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
opal glass convex lens

IP65 W-105° L80|55K

	EUR	CODE
	198,00	
	198,00	
	198,00	
	198,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	456	>90	3
3000K	480	>90	5

back



SHOP PHILMODE | ERIC FRANSSENS BEAUFAYS | BELGIUM



Outdoor
Ceiling surface





OPTIONAL

inner cover

	EUR	CODE
	23,00	
	23,00	
	23,00	
	23,00	

1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 M-21° L70|50K

	EUR	CODE
	175,00	
	175,00	
	175,00	
	175,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	670	>90	3
3000K	700	>90	5
2000-3000K	470	>90	9

back



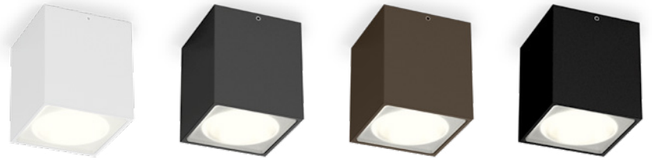



1.0

LED COB 6W| phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 M-36° L70|55K

3000K | CRI >90 | 530lm

	EUR	CODE
	142,00	
	142,00	
	142,00	
	142,00	

807

back













Outdoor
Ceiling surface





1.0 LED

LED COB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 M-32° L80|60K

3000K | CRI >90 | 720lm

	EUR	CODE
	228,00	
	228,00	
	228,00	
	228,00	

1.0 PAR16

PAR16 max. 5W | GU10
100-240VAC | 50-60Hz
aluminium

IP65

	EUR	CODE
	156,00	
	156,00	
	156,00	
	156,00	
	156,00	

OPTIONAL

PAR16 3.7W | GU10

	EUR	CODE
2700K | 350lm	13,00	
3000K | 350lm	13,00	

811

PRIVATE RESIDENCE | SPADO ARCHITECTS AUSTRIA

back



PRIVATE RESIDENCE FRANCE

Outdoor
Ceiling surface

















1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 M-21° L70|50K

OPTIONAL

inner reflector

	EUR	CODE
	21,00	
	21,00	
	21,00	
	21,00	

inner cover

	EUR	CODE
	23,00	
	23,00	
	23,00	
	23,00	

	EUR	CODE
	175,00	
	175,00	
	175,00	
	175,00	
	175,00	

LIGHT COLOUR	LUMEN|CRI	CODE
2700K	600|>90	3
3000K	620|>90	5
2000-3000K	415|>90	9

back



PRIVATE RESIDENCE | PETER RANEBURGER AUSTRIA

Outdoor
Ceiling surface









1.0

LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | clear and frosted glass

IP65 L80|50K

3000K | CRI >90 | 950lm

	EUR	CODE
	228,00	
	228,00	
	228,00	
	228,00	

2.0

LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | clear and frosted glass

IP65 L80|50K

3000K | CRI >90 | 950lm

	EUR	CODE
	244,00	
	244,00	
	244,00	
	244,00	



827

back



PRIVATE RESIDENCE BELGIUM

Outdoor
Ceiling surface

301





ø160



ø256



ø345

1.6

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA cover

IP44 SDCM3 L80|60K 0.70kg

	EUR	CODE
	168,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1170	>90	3
3000K	1220	>90	5

2.6

LED PCB 18W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA cover

IP44 SDCM3 L80|60K 1.20kg

	EUR	CODE
	245,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	1800	>90	3
3000K	1810	>90	5

3.5

LED PCB 32W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA cover

IP44 SDCM3 L80|60K 1.90kg

	EUR	CODE
	335,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	3340	>90	3
3000K	3360	>90	5

back













1.0

LED PCB 9/11/15W
220-240VAC | 50-60Hz | incl. driver
polycarbonate housing
output and light colour selectable via dip switch

IP54 L80|50K

3000K/4000K/6000K | CRI >90
960lm/1170lm/1630lm

EUR	CODE
79,00	

2.0

LED PCB 10/15/20W
220-240VAC | 50-60Hz | incl. driver
polycarbonate housing
output and light colour selectable via dip switch

IP54 L80|50K

3000K/4000K/6000K | CRI >90
1270lm/1810lm/2360lm

EUR	CODE
129,00	

3.0

LED PCB 28/33/37W
220-240VAC | 50-60Hz | incl. driver
polycarbonate housing
output and light colour selectable via dip switch

IP54 L80|50K

3000K/4000K/6000K | CRI >90
4350lm/5000lm/5570lm

EUR	CODE
225,00	



Outdoor
Ceiling surface



1.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | handblown opal glass

IP65 L80|50K

2700K | CRI >90 | 350lm

	EUR	CODE
	365,00	
	365,00	
	355,00	

777
823
back



Outdoor
Ceiling suspended



1.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | handblown opal glass

IP65 L80|50K

2700K | CRI >90 | 350lm

	EUR	CODE
	375,00	
	375,00	
	365,00	



back

Wall recessed

GUIDE LIGHTS



781



781



783



785



785



787



787

back

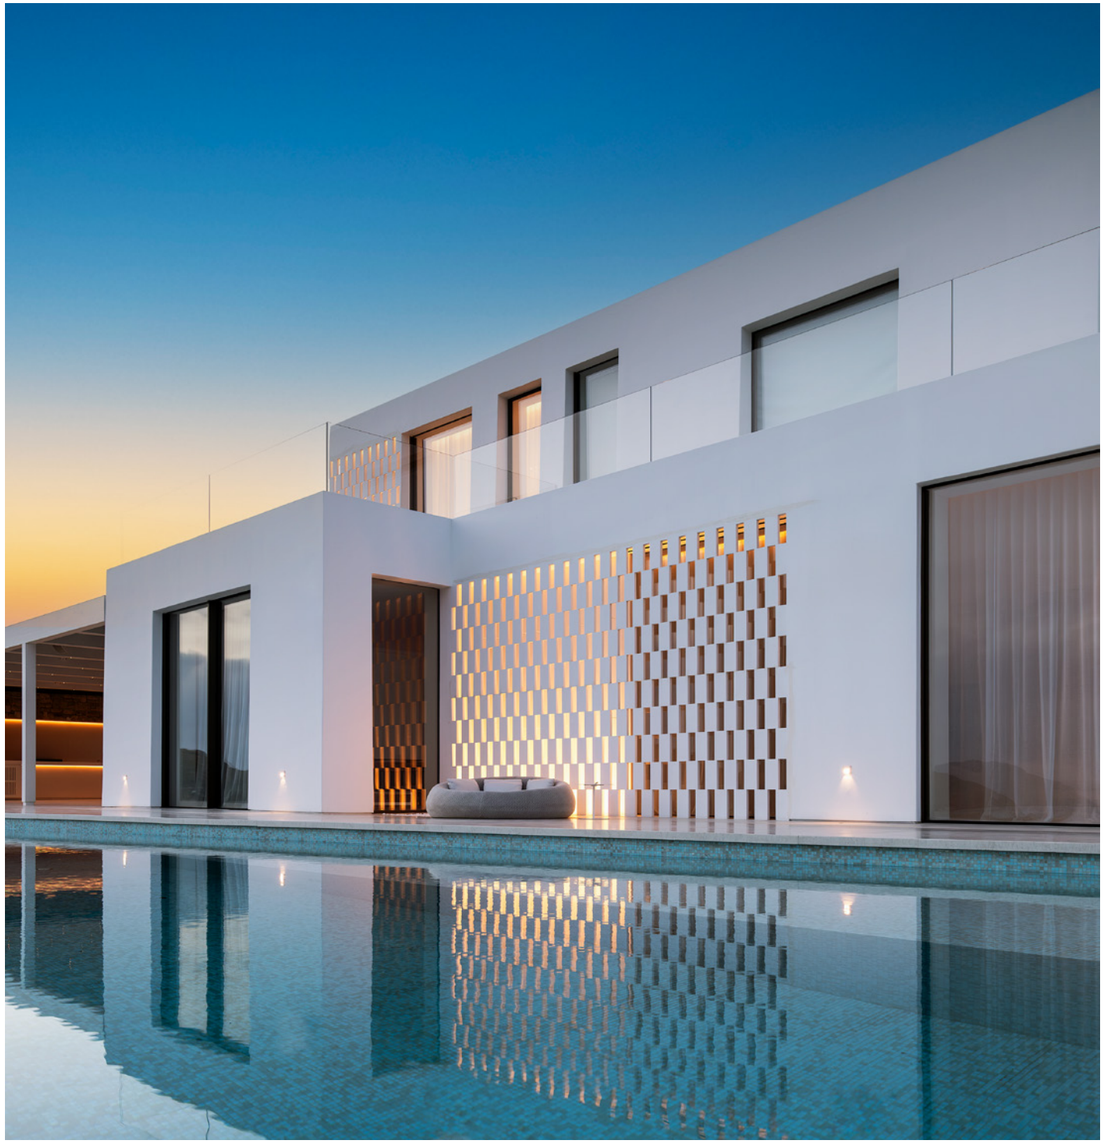





573

0.8

LED PCB 3W | const. volt. | 24V
aluminium

IP65 L80|50K

66x66 40 min. 12

3000K | CRI >90 | 75lm

	EUR	CODE
	104,00	
	104,00	
	104,00	

1.3

LED PCB 5W | const. volt. | 24V
aluminium

IP65 L80|50K

115x117 40 min. 12

3000K | CRI >90 | 170lm

	EUR	CODE
	144,00	
	144,00	
	144,00	



ALWAYS USE

driver | IP67

	EUR	CODE
24V | 35W	49,00	
24V | 100W	144,60	

specs on page 901

ALWAYS USE

driver | IP67

	EUR	CODE
24V | 35W	49,00	
24V | 100W	144,60	

specs on page 901

OPTIONAL

recessed housing incl. plasterkit*

	EUR	CODE
	46,00	

concrete housing*

	EUR	CODE
	32,00	

*driver to be placed externally

OPTIONAL

recessed housing incl. plasterkit*

	EUR	CODE
	52,00	

concrete housing*

	EUR	CODE
	39,00	

*driver to be placed externally

835

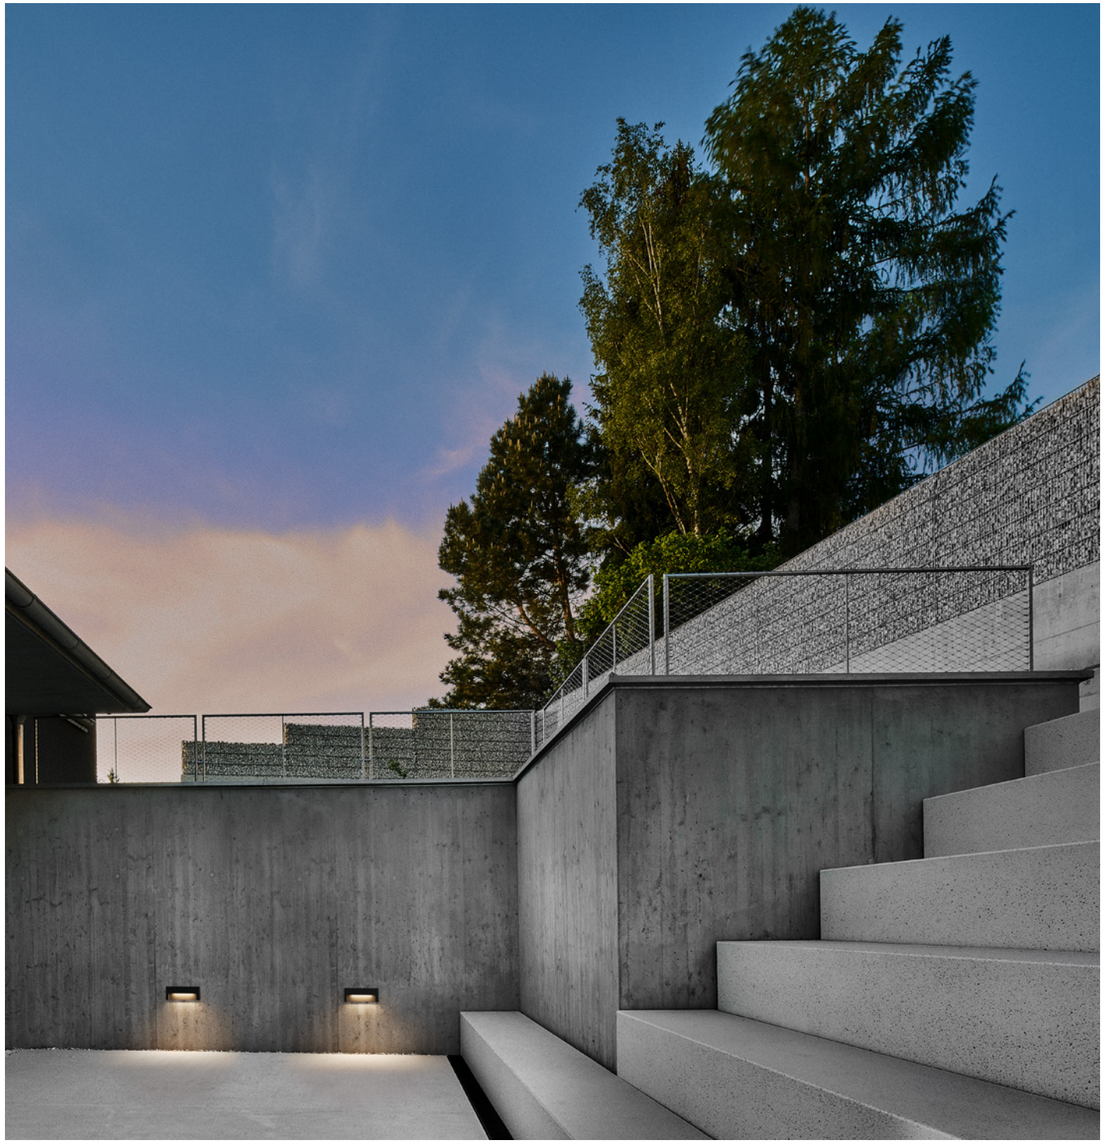

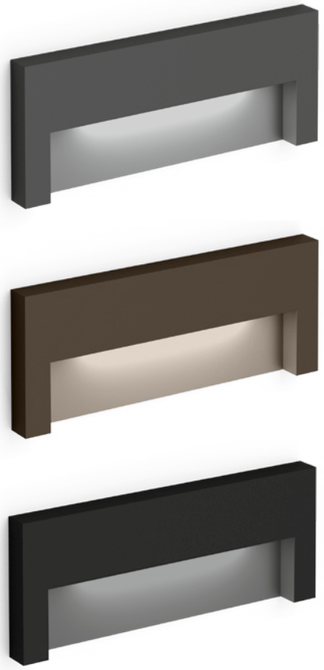

Outdoor
Wall recessed



2.0

LED PCB 7W | const. volt. | 24V
aluminium

IP65 L80|50K

47x182 L40 min. 12

3000K | CRI >90 | 330lm

	EUR	CODE
	175,00	
	175,00	
	175,00	

ALWAYS USE

driver | IP67

	EUR	CODE
24V | 35W	49,00	
24V | 100W	144,60	

specs on page 901

OPTIONAL

recessed housing incl. plasterkit*

	EUR	CODE
	45,00	

concrete housing*

	EUR	CODE
	38,00	

*driver to be placed externally

573
835





Outdoor
Wall recessed



0.7

LED PCB 2/5W| 350/700mA | 6V
aluminium

IP65 L70|60K

47x182 40 min. 12

3000K | CRI >90 | 70/120lm

	EUR	CODE
	108,00	
	108,00	
	108,00	

ALWAYS USE

driver | IP66

	EUR	CODE
3W | 350mA	35,00	
7W | 500mA	46,50	
7W | 700mA	36,50	

more options and specs on page 897

OPTIONAL

recessed housing incl. plasterkit

	EUR	CODE
	45,00	

concrete housing

	EUR	CODE
	38,00	



2.0

LED PCB 4/7W | 350/700mA | 9V
aluminium

IP65 L70|60K

115x185 40 min. 12

3000K | CRI >90 | 140/225lm

	EUR	CODE
	132,00	
	132,00	
	132,00	

ALWAYS USE

driver | IP66

	EUR	CODE
3W | 350mA	35,00	
7W | 500mA	46,50	
7W | 700mA	36,50	

more options and specs on page 897

OPTIONAL

recessed housing incl. plasterkit

	EUR	CODE
	58,00	

concrete housing

	EUR	CODE
	42,00	

main
581
main



PRIVATE RESIDENCE ARTIO STUDIO/MARTA DE LOZOYA SPAIN

Outdoor
Wall recessed





0.8

LED PCB 2/5W | 350/700mA | 6V
aluminium

IP65 L70|60K

66x66 40 min. 12

3000K | CRI >90 | 90/150lm

	EUR	CODE
	98,00	
	98,00	
	98,00	
	98,00	

1.3

LED PCB 4/7W | 350/700mA | 9V
aluminium

IP65 L70|60K

115x117 40 min. 12

3000K | CRI >90 | 145/220lm

	EUR	CODE
	122,00	
	122,00	
	122,00	
	122,00	
	122,00	

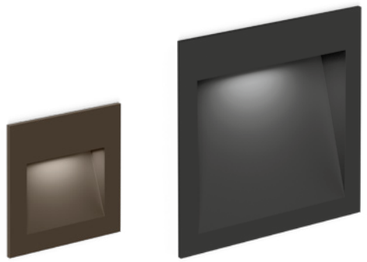

ALWAYS USE

driver | IP66

	EUR	CODE
3W | 350mA	35,00	
7W | 500mA	46,50	
7W | 700mA	36,50	

more options and specs on page 897

ALWAYS USE

driver | IP66

	EUR	CODE
3W | 350mA	35,00	
7W | 500mA	46,50	
7W | 700mA	36,50	

more options and specs on page 897

OPTIONAL

recessed housing incl. plasterkit

	EUR	CODE
	46,00	

concrete housing

	EUR	CODE
	32,00	

OPTIONAL

recessed housing incl. plasterkit

	EUR	CODE
	52,00	

concrete housing

	EUR	CODE
	39,00	

main
581
main
back

Wall surface

LUMINAIRES



791



793



797



799



801



803



805



805



807



809



811



813



815



815



817



819



819

819



821



823



825



827



827

SPOT LIGHTS



829



829

GUIDE LIGHTS



831



833



835

back







1.0

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 W-105° L80|50K

	EUR	CODE
	185,00	
	178,00	
	185,00	
	185,00	
	178,00	
	178,00	

LIGHT COLOUR	LUMEN|CRI	CODE
2700K	505|>90	3
3000K	520|>90	5

back





1.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|50K

	EUR	CODE
	226,00	
	226,00	
	226,00	
	226,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x480	>90	3
3000K	2x500	>90	5



2.0

LED PCB 22W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|100K

	EUR	CODE
	315,00	
	315,00	
	315,00	
	315,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x960	>90	3
3000K	2x1000	>90	5

back

857







PRIVATE RESIDENCE AUSTRIA

Outdoor
Wall surface







1.0

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 M-36° L70|55K

3000K | CRI >90 | 555lm

	EUR	CODE
	168,00	
	168,00	
	168,00	
	168,00	

2.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 M-36° L70|55K

3000K | CRI >90 | 2x360lm

	EUR	CODE
	218,00	
	218,00	
	218,00	
	218,00	

753

back



HOTEL VALAMAR GIRANDELLA & TUI RESORT | **STUDIO 92** RABAC | CROATIA

Outdoor
Wall surface

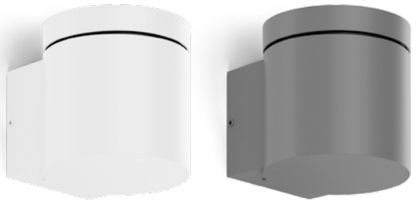







1.0 LED

LED COB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 M-36° L80|60K

3000K | CRI >90 | 635lm

	EUR	CODE
	188,00	
	188,00	
	188,00	
	188,00	

1.0 PAR16

PAR16 max. 5W | GU10
220-240VAC | 50-60Hz
aluminium

IP65

	EUR	CODE
	94,00	
	94,00	
	94,00	
	94,00	
	94,00	

OPTIONAL

PAR16 3.7W | GU10

	EUR	CODE
2700K | 350lm	13,00	
3000K | 350lm	13,00	

755

back



PRIVATE RESIDENCE | BUITENHUIS TUINONDERNEMINGEN BELGIUM

Outdoor
Wall surface









2.0 LED

LED COB 21W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 M-36° L80|60K

3000K | CRI >90 | 2x635lm

	EUR	CODE
	288,00	
	288,00	
	288,00	
	288,00	

2.0 PAR16

2x PAR16 max. 5W | GU10
220-240VAC | 50-60Hz
aluminium

IP65

	EUR	CODE
	128,00	
	128,00	
	128,00	
	128,00	
	128,00	

OPTIONAL

PAR16 3.7W | GU10

	EUR	CODE
2700K | 350lm	13,00	
3000K | 350lm	13,00	











755

back



PRIVATE RESIDENCE | GC ARCHITECTEN BELGIUM

Outdoor
Wall surface

165
299
747
757











1.0

LED COB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | protector glass
opal glass convex lens

IP65 W-105° L80|55K

	EUR	CODE
	185,00	
	185,00	
	185,00	
	185,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	435	>90	3
3000K	490	>90	5

2.0

LED COB 21W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | protector glass
opal glass convex lens

IP65 W-105° L80|55K

	EUR	CODE
	285,00	
	285,00	
	285,00	
	285,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x435	>90	3
3000K	2x490	>90	5

back



PIARISTENGASSE 23 | © **LIV.AT** VIENNA | AUSTRIA

Outdoor
Wall surface









1.0

LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 L80|55K

	EUR	CODE
	198,00	
	198,00	

incl. adjustable flaps

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	350	>90	3
3000K	370	>90	5

2.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 L80|55K

	EUR	CODE
	219,00	
	219,00	

incl. adjustable flaps

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x440	>90	3
3000K	2x460	>90	5

4.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 L80|55K

	EUR	CODE
	233,50	
	233,50	

incl. adjustable flaps

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x325	>90	3
3000K	2x345	>90	5

LOXONE VERSIONS ONLINE

251
341 | 377 | 393
537
615
759

back



GALLOP EXTENSION AT SINGAPORE BOTANIC GARDENS | KAY NGEE TAN ARCHITECTS SINGAPORE

Outdoor
Wall surface

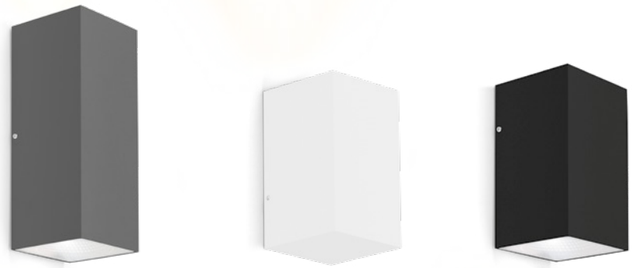









1.0 NARROW

LED PCB 6W
220-240VAC | 50-60Hz | incl. driver
aluminium
narrow up or narrow down lens

IP65 W-55°x5° L80|60K

3000K | CRI >80 | 170lm

	EUR	CODE
	178,00	

1.0

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 M-38° L70|55K

3000K | CRI >90 | 530lm

	EUR	CODE
	168,00	
	168,00	
	168,00	

2.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 M-38° L70|55K

3000K | CRI >90 | 2x375lm

	EUR	CODE
	218,00	
	218,00	
	218,00	

back



PRIVATE RESIDENCE | OLSTE & HOPROM BELGIUM



617



1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|60K

3000K | CRI >90 | 620lm

	EUR	CODE
	218,00	
	218,00	
	218,00	
	218,00	



2.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|60K

3000K | CRI >90 | 2x330lm

	EUR	CODE
	255,00	
	255,00	
	255,00	
	255,00	

back



Outdoor
Wall surface









1.0 LED

LED COB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 M-32° L80|60K

3000K | CRI >90 | 715lm

	EUR	CODE
	208,00	
	208,00	
	208,00	
	208,00	

1.0 PAR16

PAR16 max. 5W | GU10
220-240VAC | 50-60Hz
aluminium

IP65

	EUR	CODE
	136,00	
	136,00	
	136,00	
	136,00	
	136,00	

OPTIONAL

PAR16 3.7W | GU10

	EUR	CODE
2700K | 350lm	13,00	
3000K | 350lm	13,00	

763
info

PRIVATE RESIDENCE | TRANSFORM ARCHITECTUUR BELGIUM

back



PRIVATE RESIDENCE | MAA ARCHITECTURE STUDIO & ZPLUS ARCHITECTURE BELGIUM



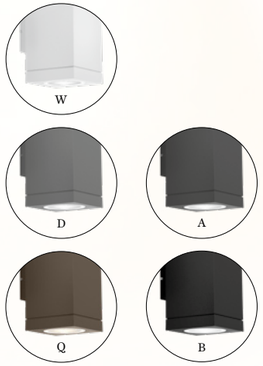

Outdoor
Wall surface



2.0 LED

LED COB 20W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 M-36° L80|60K

3000K | CRI >90 | 2x745lm

	EUR	CODE
	309,00	
	309,00	
	309,00	
	309,00	



2.0 PAR16

2x PAR16 max. 5W | GU10
220-240VAC | 50-60Hz
aluminium

IP65

	EUR	CODE
	179,00	
	179,00	
	179,00	
	179,00	
	179,00	

OPTIONAL

PAR16 3.7W | GU10

	EUR	CODE
2700K | 350lm	13,00	
3000K | 350lm	13,00	

763

back



PRIVATE RESIDENCE | RARDO ARCHITECTS SPAIN

Outdoor
Wall surface



















MORE VERSIONS + LOXONE ONLINE

1.0

LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 L80|55K

	EUR	CODE
	198,00	
	198,00	
	198,00	
	198,00	
	198,00	

incl. adjustable flaps

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	350	>90	3
3000K	370	>90	5

2.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 L80|55K

	EUR	CODE
	219,00	
	219,00	
	219,00	
	219,00	
	219,00	

incl. adjustable flaps

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x440	>90	3
3000K	2x460	>90	5

4.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 L80|55K

	EUR	CODE
	234,00	
	234,00	
	234,00	
	234,00	

incl. adjustable flaps

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x325	>90	3
3000K	2x345	>90	5

235
335
607
765
back

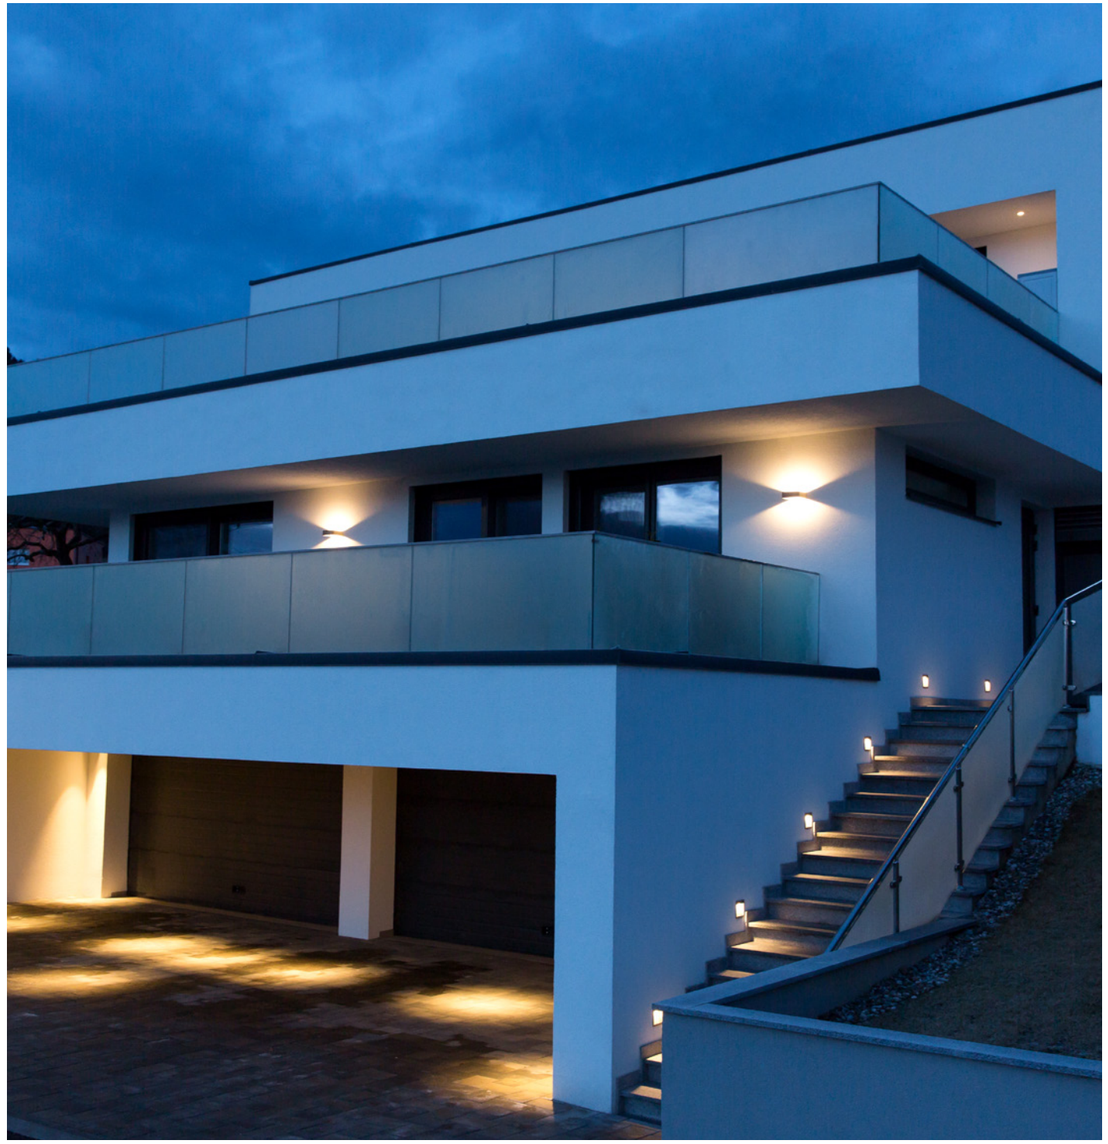



Outdoor
Wall surface



1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|60K

3000K | CRI >90 | 425lm



	EUR	CODE
	298,00	
	298,00	
	298,00	
	298,00	

back



PRIVATE RESIDENCE | BAUBUREAU OG 27 SWITZERLAND

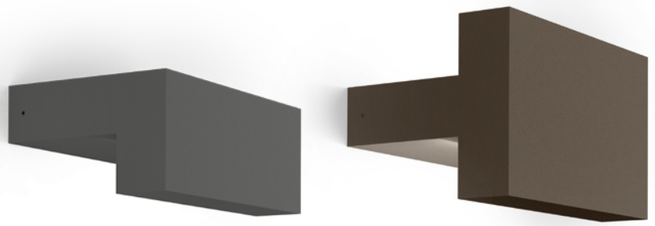



1.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|60K

	EUR	CODE
	265,00	
	265,00	
	265,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	680	>80	2
3000K	700	>80	4



2.0

LED PCB 21W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|60K

	EUR	CODE
	328,00	
	328,00	
	328,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x600	>80	2
3000K	2x620	>80	4



3.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|60K

	EUR	CODE
	225,00	
	225,00	
	225,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	745	>80	2
3000K	770	>80	4

877

back











1.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 L80|60K

2700K | CRI >90 | 410lm

	EUR	CODE
	239,00	
	248,00	
	239,00	

2.0

LED PCB 14W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 L80|60K

2700K | CRI >90 | 670lm

	EUR	CODE
	283,00	
	294,00	
	283,00	

859



1.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | handblown opal glass

IP65 L80|50K

2700K | CRI >90 | 350lm

	EUR	CODE
	365,00	
	365,00	
	355,00	

back

775
777
STEP





Outdoor
Wall surface



1.0

LED PCB 5W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | ribbed glass

IP65 L80|100K

	EUR	CODE
	325,00	
	325,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	415	>90	3
3000K	425	>90	5

709
867
back

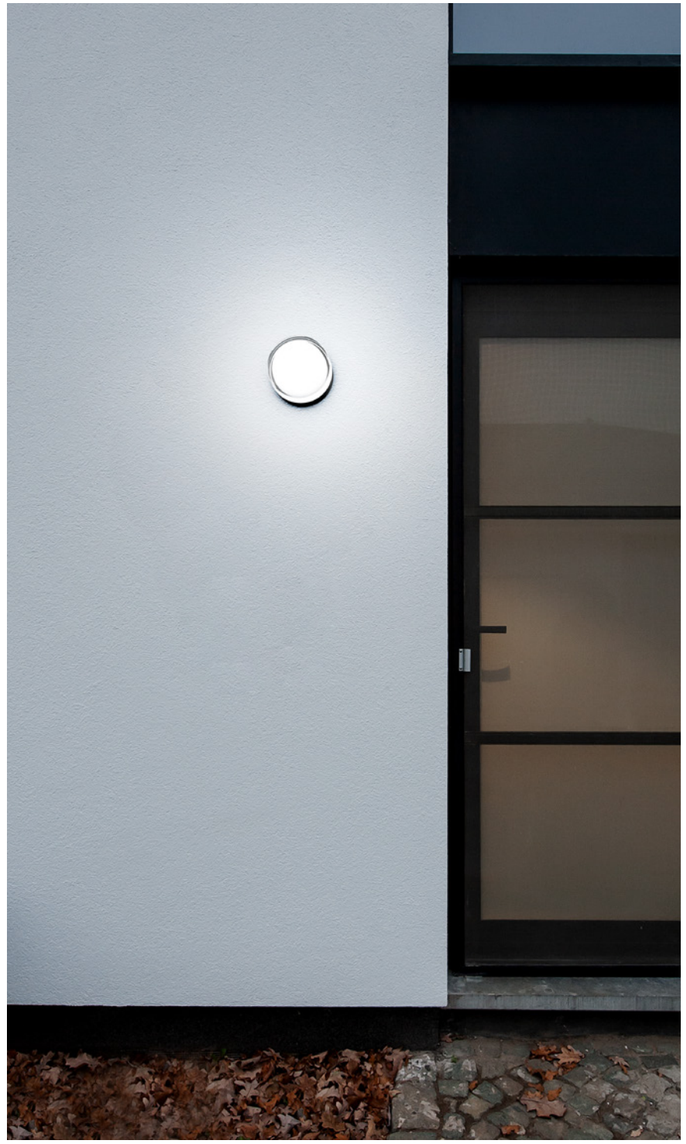







767

1.0

LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz
aluminium
clear and frosted glass

IP65 L80|50K

3000K | CRI >90 | 950lm

	EUR	CODE
	228,00	
	228,00	

2.0

LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz
aluminium
clear and frosted glass

IP65 L80|50K

3000K | CRI >90 | 950lm

	EUR	CODE
	244,00	
	244,00	

























OPTIONAL

snoot

	EUR	CODE
	35,00	

snoot round

	EUR	CODE
	35,00	

specs on page 911

1.0

LED PCB 24W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 0-110° W-108° L80|60K

3000K | CRI >80 | 1590lm

	EUR	CODE
	345,00	
	345,00	
	345,00	

1.0 ROUND

LED PCB 24W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 0-110° W-108° L80|60K

3000K | CRI >80 | 1520lm

	EUR	CODE
	345,00	
	345,00	
	345,00	

IP65
865





1.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|100K

3000K | CRI >90 | 525lm

	EUR	CODE
	185,00	
	185,00	
	185,00	

back



PRIVATE RESIDENCE SPAIN

Outdoor
Wall surface

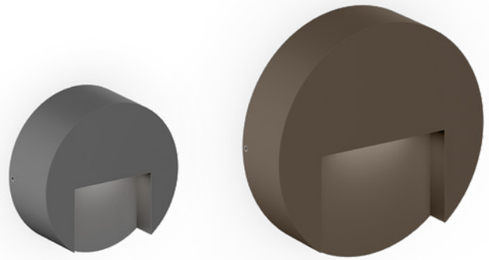





0.8

LED PCB 4W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|100K

3000K | CRI >90 | 105lm

	EUR	CODE
	158,00	
	158,00	
	158,00	

1.3

LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|100K

3000K | CRI >90 | 160lm

	EUR	CODE
	198,00	
	198,00	
	198,00	

back



PRIVATE RESIDENCE | RARDO ARCHITECTS SPAIN

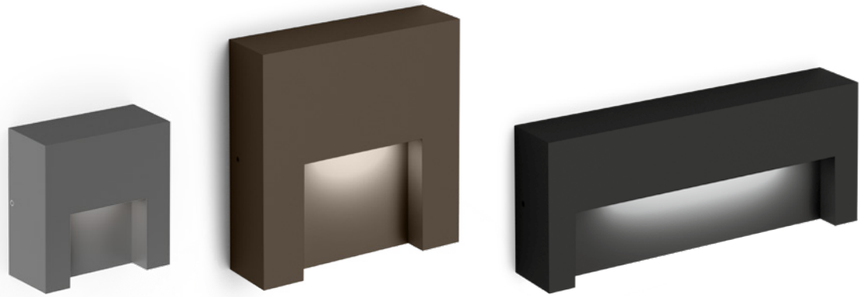







0.8

LED PCB 4W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|100K

3000K | CRI >90 | 105lm

	EUR	CODE
	158,00	
	158,00	
	158,00	

1.3

LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|50K

3000K | CRI >90 | 160lm

	EUR	CODE
	198,00	
	198,00	
	198,00	

2.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|50K

3000K | CRI >90 | 335lm

	EUR	CODE
	188,00	
	188,00	
	188,00	

573
781
back

Floor recessed

836 – 853

RECESSED



839



839



843



843



845



849



851



853

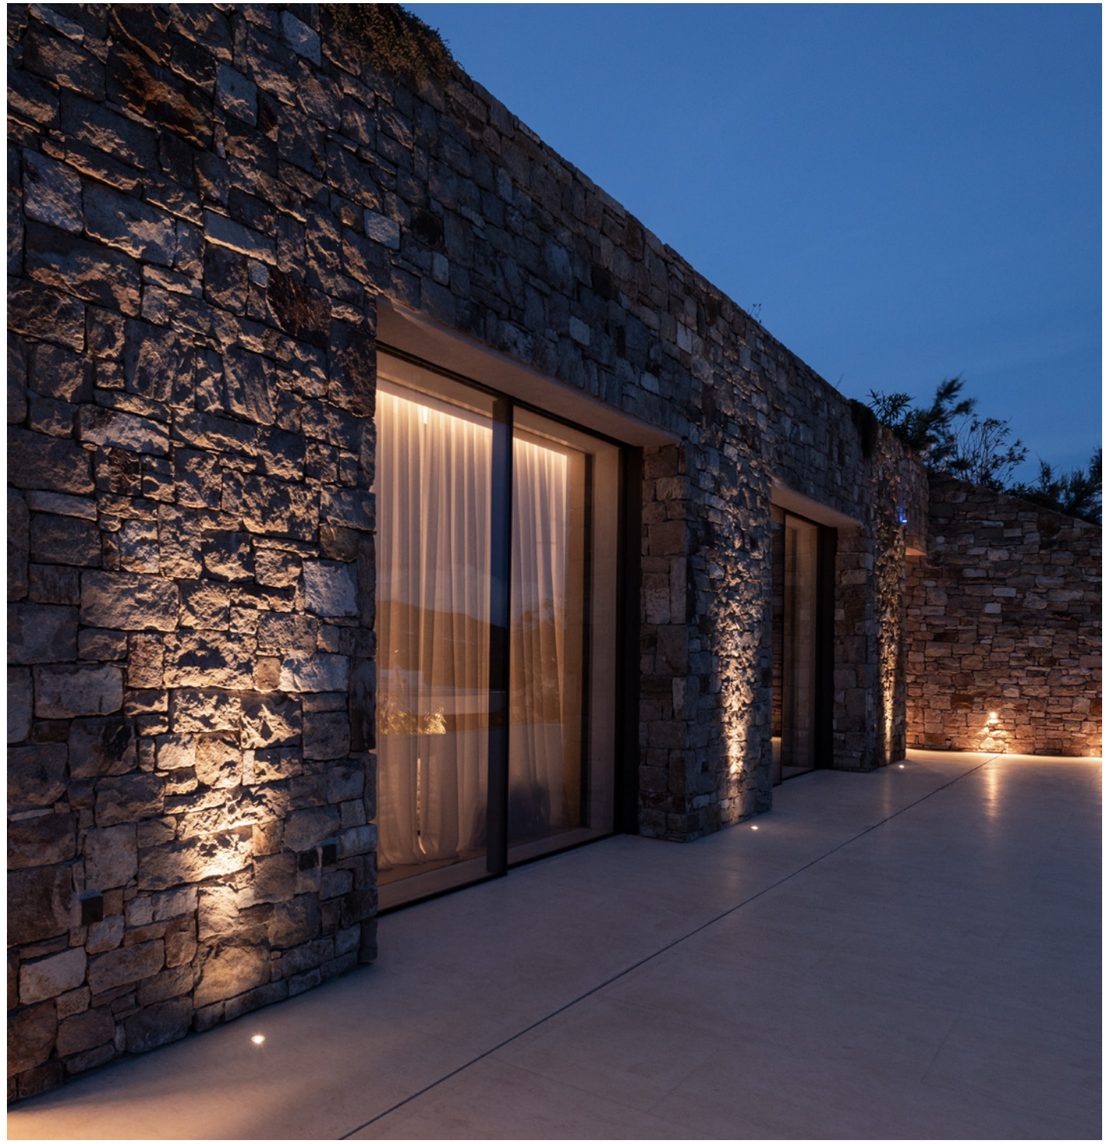



1.0 TRIMLESS

LED COB 6W | 500mA | 9V
aluminium | glass

IP65 IK08 M-30° L80|50K

3000K | CRI >90 | 410lm

	EUR	CODE
	218,00	

ALWAYS USE

driver | 500mA

	EUR	CODE
7W dim	25,50	
7W IP67	46,50	

more options and specs on page 898

ALWAYS USE

recessed ground housing | polyamide

137 110



	EUR	CODE
	25,00	



1.0

LED COB 6W | 500mA | 9V
aluminium | glass

IP65 IK08 M-30° L80|50K

47-49

3000K | CRI >90 | 410lm

	EUR	CODE
	205,00	

ALWAYS USE

driver | 500mA

	EUR	CODE
7W dim	25,50	
7W IP67	46,50	

more options and specs on page 898

OPTIONAL

recessed ground housing | polyamide

137 110



	EUR	CODE
	25,00	



PRIVATE RESIDENCE GREECE









2.0 TRIMLESS

LED COB 11W | 500mA | 20V
aluminium | glass

IP65 IK08 M-38° L80|50K

3000K | CRI >90 | 700lm

	EUR	CODE
	239,00	

ALWAYS USE

driver | 500mA

	EUR	CODE
20W dim	45,50	
24W IP68	74,00	

more options and specs on page 898

ALWAYS USE

recessed ground housing | polyamide

137 130



	EUR	CODE
	34,00	



2.0

LED COB 11W | 500mA | 20V
aluminium | glass

IP65 IK08 M-38° L80|50K

84-86

3000K | CRI >90 | 700lm

	EUR	CODE
	229,00	

ALWAYS USE

driver | 500mA

	EUR	CODE
20W dim	45,50	
24W IP68	74,00	

more options and specs on page 898

OPTIONAL

recessed ground housing | polyamide

137 130



	EUR	CODE
	34,00	

back



DIJLEPAD MECHELEN | BELGIUM

Outdoor
Floor recessed





0.1

LED PCB 2W | 350mA | 3V
aluminium | stainless steel | glass

IP67 IK07 N-16° L70|60K

22-24 60

3000K | CRI >80 | 90lm

	EUR	CODE
	86,00	

ALWAYS USE

driver | IP66

	EUR	CODE
3W | 350mA	35,00	

more options and specs on page 897

0.2

LED PCB 2W | 350mA | 3V
aluminium | stainless steel | glass

IP67 IK07 N-16° L70|60K

22-24 60

3000K | CRI >80 | 90lm

	EUR	CODE
	106,00	

ALWAYS USE

driver | IP66

	EUR	CODE
3W | 350mA	35,00	

more options and specs on page 897





back



PRIVATE RESIDENCE | RARDO ARCHITECTS SPAIN

Outdoor
Floor recessed





0.6

LED COB 5W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass

IP67 IK08 W-43° L70|55K

100

3000K | CRI >90 | 310lm

	EUR	CODE
	205,00	



0.9

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass

IP67 IK08 W-35° L70|55K

135

3000K | CRI >90 | 685lm

	EUR	CODE
	228,00	

OPTIONAL

recessed ground housing | polyamide

137 110



	EUR	CODE
	25,00	

OPTIONAL

recessed ground housing | polyamide

137 130



	EUR	CODE
	34,00	

back



TOPSPORTSCHOOL | UAU COLLECTIV HASSELT | BELGIUM





1.2

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass

IP67 IK08 W-44° L70|55K

120

3000K | CRI >90 | 995lm

	EUR	CODE
	278,00	

OPTIONAL

recessed ground housing | polyamide

190 158



	EUR	CODE
	47,00	



1.6

LED COB 17W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass

IP67 IK09 M-38° L70|55K

185

3000K | CRI >90 | 1260lm

	EUR	CODE
	410,00	

OPTIONAL

recessed ground housing | polyamide

220 184



	EUR	CODE
	61,00	

back



PRIVATE RESIDENCE OBUMEX – STEENOVEN BELGIUM

Outdoor
Floor recessed



1.2

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass
asymmetric reflector

IP67 IK08 L70|55K

160

3000K | CRI >90 | 565lm

	EUR	CODE
	298,00	



1.6

LED COB 16W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass
asymmetric reflector

IP67 IK09 L70|55K

185

3000K | CRI >90 | 845lm

	EUR	CODE
	440,00	

OPTIONAL

recessed ground housing | polyamide

190 158



	EUR	CODE
	47,00	

OPTIONAL

recessed ground housing | polyamide

220 184



	EUR	CODE
	61,00	



back







0.6

LED COB 5W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass

IP67 IK08 W-43° L70|55K

L118

3000K | CRI >90 | 310lm

	EUR	CODE
	208,00	

OPTIONAL

recessed ground housing | polyamide

Ø137 L110



	EUR	CODE
	25,00	



0.9

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass

IP67 IK08 M-35° L70|55K

L135

3000K | CRI >90 | 640lm

	EUR	CODE
	234,00	

OPTIONAL

recessed ground housing | polyamide

Ø137 L130



	EUR	CODE
	34,00	



1.2

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass

IP67 IK08 W-44° L70|55K

L175

3000K | CRI >90 | 995lm

	EUR	CODE
	285,00	

OPTIONAL

recessed ground housing | polyamide

Ø190 L158



	EUR	CODE
	47,00	



1.6

LED COB 17W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass

IP67 IK09 M-38° L70|55K

L185

3000K | CRI >90 | 1260lm

	EUR	CODE
	425,00	

OPTIONAL

recessed ground housing | polyamide

Ø220 L184



	EUR	CODE
	61,00	



1.2

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass
asymmetric reflector

IP67 IK08 L70|55K

160

3000K | CRI >90 | 565lm

	EUR	CODE
	305,00	



1.6

LED COB 16W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass
asymmetric reflector

IP67 IK09 L70|55K

185

3000K | CRI >90 | 845lm

	EUR	CODE
	455,00	

OPTIONAL

recessed ground housing | polyamide

190 158



	EUR	CODE
	47,00	

OPTIONAL

recessed ground housing | polyamide

220 184



	EUR	CODE
	61,00	



back

Floor surface

854 - 891

LUMINAIRES

857

857

857


859


859

PROJECTORS


863


863


865


865

BOLLARDS

867

869

869


871


871


873


877

881

PLUG & PLAY


885

885

887


887

889

889



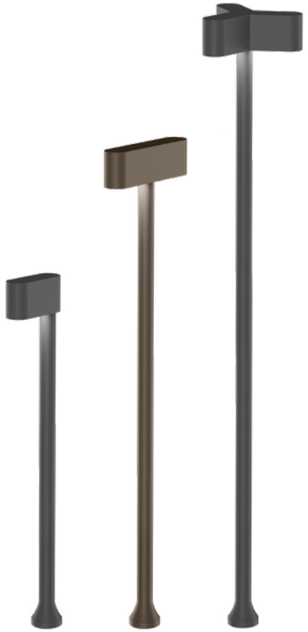

Outdoor
Floor surface



1.1

LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|50K

3000K | CRI >90 | 395lm

	EUR	CODE
	176,00	
	176,00	

ALWAYS USE

pole | incl. ground spike

	EUR	CODE
400	114,00	
600	125,00	
800	138,00	

	CODE
	A
	Q

order fixation separately

OPTIONAL

ground fixation plate

	EUR	CODE
	22,00	



1.2

LED PCB 13W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|50K

3000K | CRI >90 | 2x380lm

	EUR	CODE
	198,00	
	198,00	

ALWAYS USE

pole | incl. ground spike

	EUR	CODE
400	114,00	
600	125,00	
800	138,00	

	CODE
	A
	Q

order fixation separately

OPTIONAL

ground fixation plate

	EUR	CODE
	22,00	



1.3

LED PCB 19W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|50K

3000K | CRI >90 | 3x375lm

	EUR	CODE
	238,00	
	238,00	

ALWAYS USE

pole | incl. ground spike

	EUR	CODE
400	114,00	
600	125,00	
800	138,00	

	CODE
	A
	Q

order fixation separately

OPTIONAL

ground fixation plate

	EUR	CODE
	22,00	

793



Outdoor
Floor surface





1.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 L80|60K

2700K | CRI >90 | 310lm

	EUR	CODE
	275,00	
	283,00	
	275,00	

ALWAYS USE

straight pole | incl. ground spike

	EUR	CODE
400	103,00	
600	115,00	
800	128,00	

	CODE
	B
	Q

order fixation separately

OPTIONAL

ground fixation plate

	EUR	CODE
	22,00	



1.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 L80|60K

2700K | CRI >90 | 310lm

	EUR	CODE
	275,00	
	283,00	
	275,00	

ALWAYS USE

curved pole | incl. ground spike

	EUR	CODE
400	142,00	
600	144,00	
800	155,00	

	CODE
	B
	Q

order fixation separately

OPTIONAL

ground fixation plate

	EUR	CODE
	22,00	

821





HOTEL BRITANNIA | S-CONSULTANCY KNOKKE-HEIST | BELGIUM







Outdoor
Floor surface









1.0

LED COB 7W | phase-cut dim
220-240VAC | 50/60Hz
aluminium

IP65 135° M-38° L70|55K

3000K | CRI >90 | 450lm

	EUR	CODE
	199,00	
	199,00	

OPTIONAL

ground spike

	EUR	CODE
	27,00	

2.0

LED COB 7W | phase-cut dim
220-240VAC | 50/60Hz
aluminium

IP65 135° M-38° L70|55K

3000K | CRI >90 | 500lm

	EUR	CODE
	197,00	
	197,00	

OPTIONAL

ground spike

	EUR	CODE
	27,00	

3.0

LED COB 7W | phase-cut dim
220-240VAC | 50/60Hz
aluminium

IP65 135° M-38° L70|55K

3000K | CRI >90 | 450lm

	EUR	CODE
	196,00	
	196,00	

ALWAYS USE

pole

	EUR	CODE
200	34,00	
400	38,00	
600	41,00	

	CODE
	A
	Q

order spike separately

OPTIONAL

ground spike

	EUR	CODE
	27,00	

4.0

LED COB 7W | phase-cut dim
220-240VAC | 50/60Hz
aluminium

IP65 135° M-38° L70|55K

3000K | CRI >90 | 500lm

	EUR	CODE
	194,00	
	194,00	

ALWAYS USE

pole

	EUR	CODE
200	34,00	
400	38,00	
600	41,00	

	CODE
	A
	Q

order spike separately

OPTIONAL

ground spike

	EUR	CODE
	27,00	



PRIVATE RESIDENCE GREECE











OPTIONAL

ground spike

	EUR	CODE
	29,00	

snoot

	EUR	CODE
	35,00	

snoot round

	EUR	CODE
	35,00	



1.0

LED COB 24W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 0-110° W-108° L80|60K

3000K | CRI >80 | 1590lm

	EUR	CODE
	345,00	
	345,00	
	345,00	

1.0 ROUND

LED PCB 24W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 0-110° W-108° L80|60K

3000K | CRI >80 | 1520lm

	EUR	CODE
	345,00	
	345,00	
	345,00	

829

back







1.0

LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | ribbed glass

IP65 L80|100K

	EUR	CODE
	380,00	
	380,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	590	>90	3
3000K	610	>90	5



2.0

LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | ribbed glass

IP65 L80|100K

	EUR	CODE
	445,00	
	445,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	590	>90	3
3000K	610	>90	5

709
825
back



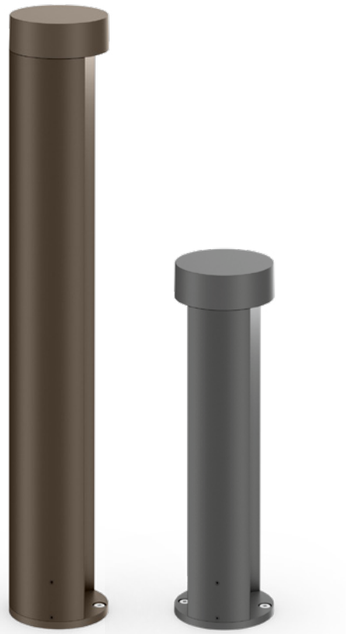



1.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | glass

IP65 L80|50K

	EUR	CODE
	155,00	
	155,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	400	>80	2
3000K	420	>80	4

ALWAYS USE

pole with fixation plate

	EUR	CODE
250	58,00	
450	69,00	
650	88,00	

	CODE
	A
	Q



2.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | glass

IP65 L80|50K

	EUR	CODE
	185,00	
	185,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x290	>80	2
3000K	2x305	>80	4

ALWAYS USE

pole with fixation plate

	EUR	CODE
250	58,00	
450	69,00	
650	88,00	

	CODE
	A
	Q

back

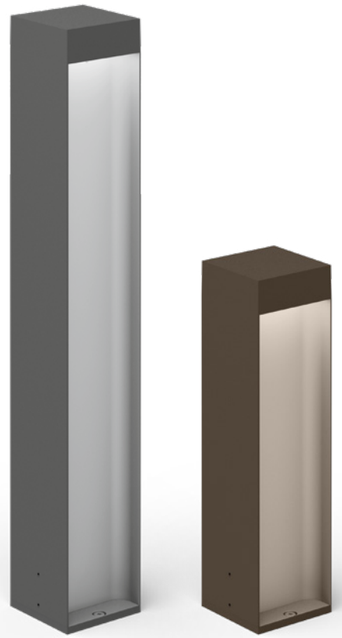



1.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | glass

IP65 L80|50K

	EUR	CODE
	158,00	
	158,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	400	>80	2
3000K	420	>80	4

ALWAYS USE

pole with fixation plate

	EUR	CODE
250	66,00	
450	77,00	
650	96,00	

	CODE
	A
	Q



2.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | glass

IP65 L80|50K

	EUR	CODE
	188,00	
	188,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x290	>80	2
3000K	2x305	>80	4

ALWAYS USE

pole with fixation plate

	EUR	CODE
250	66,00	
450	77,00	
650	96,00	

	CODE
	A
	Q

back



PRIVATE RESIDENCE BELGIUM

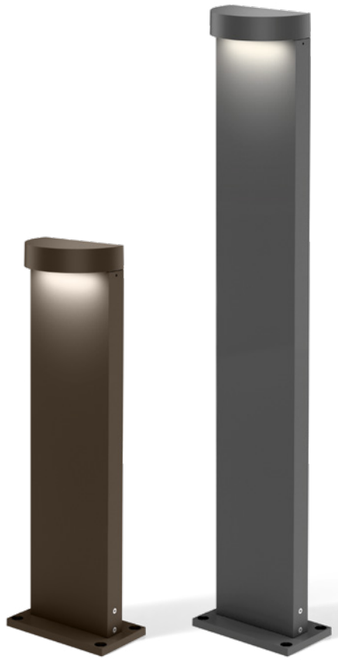



1.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|60K

	EUR	CODE
	218,00	
	218,00	
	218,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	680	>80	2
3000K	700	>80	4

ALWAYS USE

pole with fixation plate

	EUR	CODE
170	98,00	
270	108,00	
470	123,00	
670	136,00	
870	155,00	

	CODE
	A
	Q
	B



1.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|60K

	EUR	CODE
	218,00	
	218,00	
	218,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	680	>80	2
3000K	700	>80	4

ALWAYS USE

pole with concrete fixation

	EUR	CODE
170	124,00	
270	136,00	
470	148,00	
670	162,00	
870	188,00	

	CODE
	A
	Q
	B



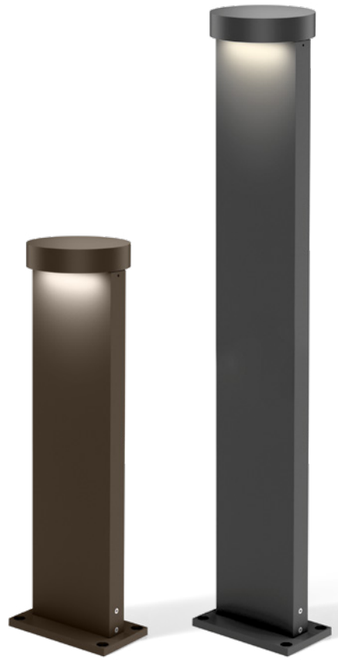



2.0

LED PCB 21W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|60K

	EUR	CODE
	298,00	
	298,00	
	298,00	

LIGHT COLOUR	LUMEN|CRI	CODE
2700K	2x655|>80	2
3000K	2x675|>80	4

ALWAYS USE

pole with fixation plate

	EUR	CODE
170	98,00	
270	108,00	
470	123,00	
670	136,00	
870	155,00	

	CODE
	A
	Q
	B



2.0

LED PCB 21W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|60K

	EUR	CODE
	298,00	
	298,00	
	298,00	

LIGHT COLOUR	LUMEN|CRI	CODE
2700K	2x655|>80	2
3000K	2x675|>80	4

ALWAYS USE

pole with concrete fixation

	EUR	CODE
170	124,00	
270	136,00	
470	148,00	
670	162,00	
870	188,00	

	CODE
	A
	Q
	B

back



PRIVATE RESIDENCE | OPEN ARCHITECTES BELGIUM

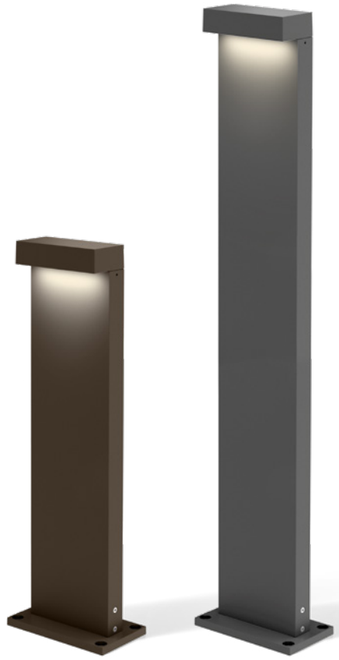



1.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|60K

	EUR	CODE
	218,00	
	218,00	
	218,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	680	>80	2
3000K	700	>80	4

ALWAYS USE

pole with fixation plate

	EUR	CODE
170	98,00	
270	108,00	
470	123,00	
670	136,00	
870	155,00	

	CODE
	A
	Q
	B



1.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|60K g

	EUR	CODE
	218,00	
	218,00	
	218,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	680	>80	2
3000K	700	>80	4

ALWAYS USE

pole with concrete fixation

	EUR	CODE
170	124,00	
270	136,00	
470	148,00	
670	162,00	
870	188,00	

	CODE
	A
	Q
	B

819



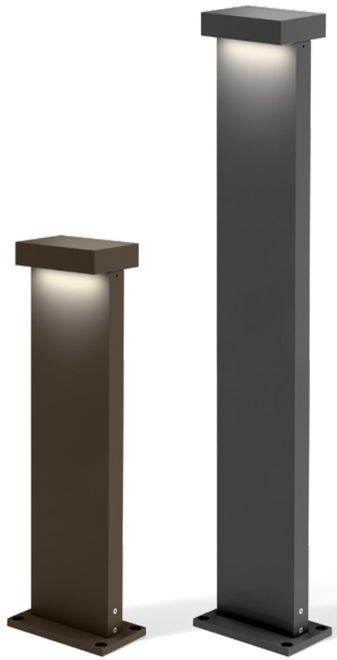



2.0

LED PCB 21W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|60K

	EUR	CODE
	298,00	
	298,00	
	298,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x655	>80	2
3000K	2x675	>80	4

ALWAYS USE

pole with fixation plate

	EUR	CODE
170	98,00	
270	108,00	
470	123,00	
670	136,00	
870	155,00	

	CODE
	A
	Q
	B



2.0

LED PCB 21W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 L80|60K

	EUR	CODE
	298,00	
	298,00	
	298,00	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x655	>80	2
3000K	2x675	>80	4

ALWAYS USE

pole with concrete fixation

	EUR	CODE
170	124,00	
270	136,00	
470	148,00	
670	162,00	
870	188,00	

	CODE
	A
	Q
	B

819

back

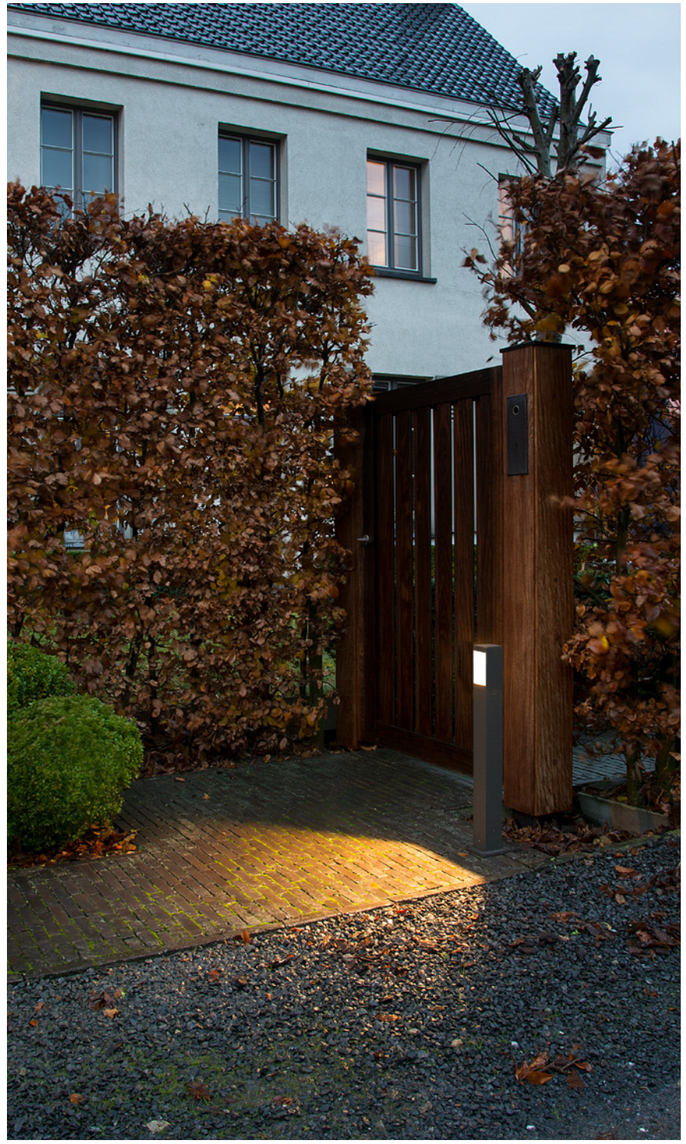

PRIVATE RESIDENCE BELGIUM

Outdoor
Floor surface



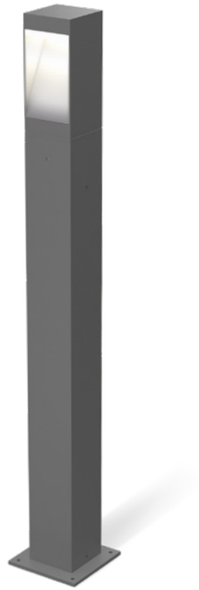

3.0

LED COB 7W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 L70|50K

3000K | CRI >90 | 215lm

	EUR	CODE
	169,00	
	169,00	
	169,00	

OPTIONAL

ground spike

	EUR	CODE
	62,00	

ground fixation

	EUR	CODE
	62,00	

ALWAYS USE

pole

	EUR	CODE
150	83,00	
350	109,00	
550	139,00	

	CODE
	D
	A
	Q

back

driver

Elles mettent les façades en valeur, éclairent le jardin et rendent les allées visibles la nuit – les luminaires extérieurs modernes sont de véritables polyvalents. Avec le système 24V Plug & Play, l'installation est simple : une prise, un driver adapté et plusieurs luminaires se connectent facilement.

1 CHOOSE YOUR LUMINAIRES



page 885 page 887 page 889

Two, three, four, or even more, the choice is yours! The number of lights and the sum of their individual wattages is the first thing you need to know to get started with your Plug & Play Connector System.

GOOD TO KNOW
24V Plug & Play Connector System recommends adding 2 or more luminaires to the driver.

2 DEFINE THE DISTANCE BETWEEN DRIVER AND LUMINAIRE

Adjacent or far away. The distance between the driver and the first light is very important as it determines the further options of your 24V Plug & Play Connector System lighting solution. You can find detailed information about your options at

GOOD TO KNOW
Each driver is supplied with two 2.5m cables, one for each side.

3 CHOOSE YOUR DRIVER AND SET UP YOUR LUMINAIRES

Accessory options on page 927

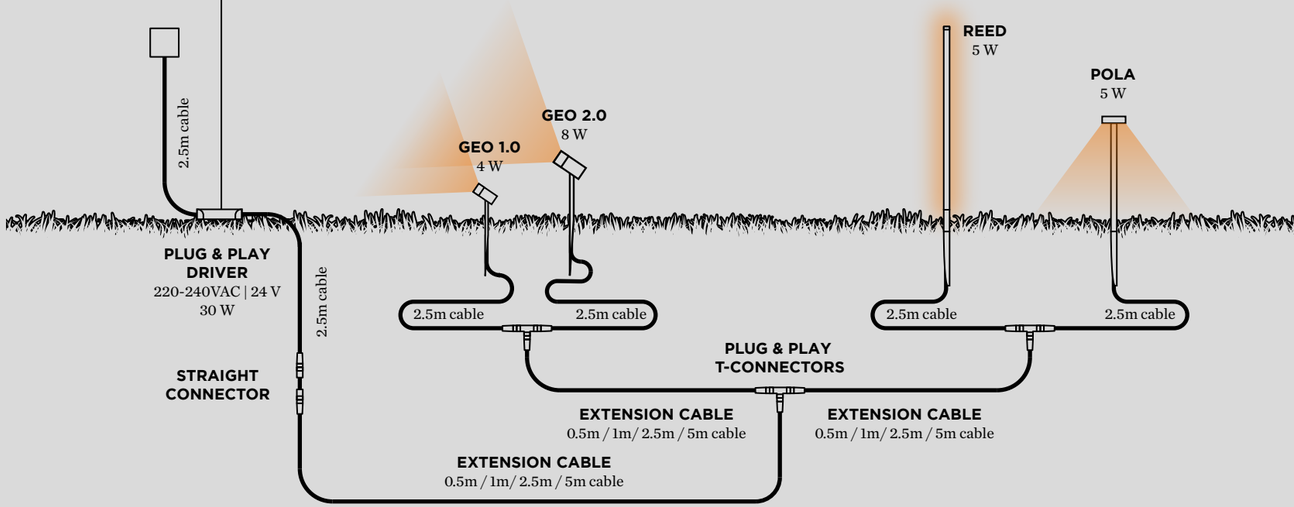

Plug & Play
24V

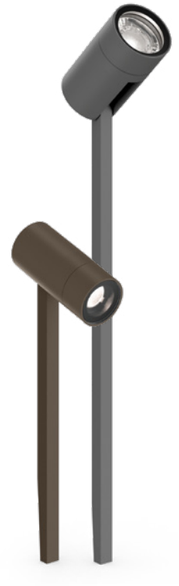

Plug & Play
24V







ALWAYS USE

Plug & Play straight connector IP67
2x 24V female connector

	EUR	CODE
	9,50	

Plug & Play t-connector IP67
3x 24V female connector

	EUR	CODE
	15,50	

OPTIONAL

Plug & Play extension cable IP67
2x 24V male plug

	EUR	CODE
0.5m	16,00	
1m	26,00	
2.5m	38,00	
5m	58,00	

1.0

LED PCB 4W | 24V | ground spike
aluminium | glass
Plug & Play connector system
incl. 2.5m cable | male plug

IP65 H07R-F 0°-135° M-30° L80|50K

2700K | CRI >90 | 245lm

	EUR	CODE
	129,00	
	129,00	

ALWAYS USE

Plug & Play driver | 220-240VAC | 24V
IP67 | incl. 2.5m cable with 240V plug
incl. 2.5 cable with 24V male plug

	EUR	CODE
30W	99,00	
75W	119,00	

2.0

LED PCB 8W | 24V | ground spike
aluminium | glass
Plug & Play connector system
incl. 2.5m cable | male plug

IP65 H07R-F 0°-135° M-33° L80|50K

2700K | CRI >90 | 440lm

	EUR	CODE
	230,00	
	230,00	

ALWAYS USE

Plug & Play driver | 220-240VAC | 24V
IP67 | incl. 2.5m cable with 240V plug
incl. 2.5 cable with 24V male plug

	EUR	CODE
30W	99,00	
75W	119,00	

back





Plug & Play
24V

ALWAYS USE

Plug & Play straight connector IP67
2x 24V female connector

	EUR	CODE
	9,50	

Plug & Play t-connector IP67
3x 24V female connector

	EUR	CODE
	15,50	

OPTIONAL

Plug & Play extension cable IP67
2x 24V male plug

	EUR	CODE
0.5m	16,00	
1m	26,00	
2.5m	38,00	
5m	58,00	



1.0

LED PCB 5W | 24V | ground spike
aluminium | opal PC cover
Plug & Play connector system
incl. 2.5m cable | male plug

IP65 H07R-F L80|50K

2700K | CRI >90 | 330lm

	EUR	CODE
	142,00	
	142,00	

ALWAYS USE

Plug & Play driver | 220-240VAC | 24V
IP67 | incl. 2.5m cable with 240V plug
incl. 2.5 cable with 24V male plug

	EUR	CODE
30W	99,00	
75W	119,00	



2.0

LED PCB 6W | 24V | ground spike
aluminium | opal PC cover
Plug & Play connector system
incl. 2.5m cable | male plug

IP65 H07R-F L80|50K

2700K | CRI >90 | 395lm

	EUR	CODE
	172,00	
	172,00	

ALWAYS USE

Plug & Play driver | 220-240VAC | 24V
IP67 | incl. 2.5m cable with 240V plug
incl. 2.5 cable with 24V male plug

	EUR	CODE
30W	99,00	
75W	119,00	



PRIVATE RESIDENCE AUSTRIA

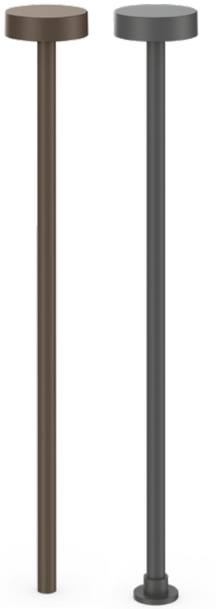

Plug & Play
24V

ALWAYS USE

Plug & Play straight connector IP67
2x 24V female connector

EUR	CODE
9,50	

Plug & Play t-connector IP67
3x 24V female connector

EUR	CODE
15,50	

OPTIONAL

Plug & Play extension cable IP67
2x 24V male plug

	EUR	CODE
0.5m	16,00	
1m	26,00	
2.5m	38,00	
5m	58,00	



2.0

LED PCB 5W | 24V | ground spike
aluminium | glass
Plug & Play connector system
incl. 2.5m cable | male plug

IP65 H07R-F L80|100K

2700K | CRI >90 | 250lm

	EUR	CODE
	198,00	
	198,00	

ALWAYS USE

Plug & Play driver | 220-240VAC | 24V
IP67 | incl. 2.5m cable with 240V plug
incl. 2.5 cable with 24V male plug

	EUR	CODE
30W	99,00	
75W	119,00	



2.1

LED PCB 5W | 24V | fixation plate
aluminium | glass
Plug & Play connector system
incl. 2.5m cable | male plug

IP65 H07R-F L80|100K

2700K | CRI >90 | 250lm

	EUR	CODE
	196,00	
	196,00	

ALWAYS USE

Plug & Play driver | 220-240VAC | 24V
IP67 | incl. 2.5m cable with 240V plug
incl. 2.5 cable with 24V male plug

	EUR	CODE
30W	99,00	
75W	119,00	

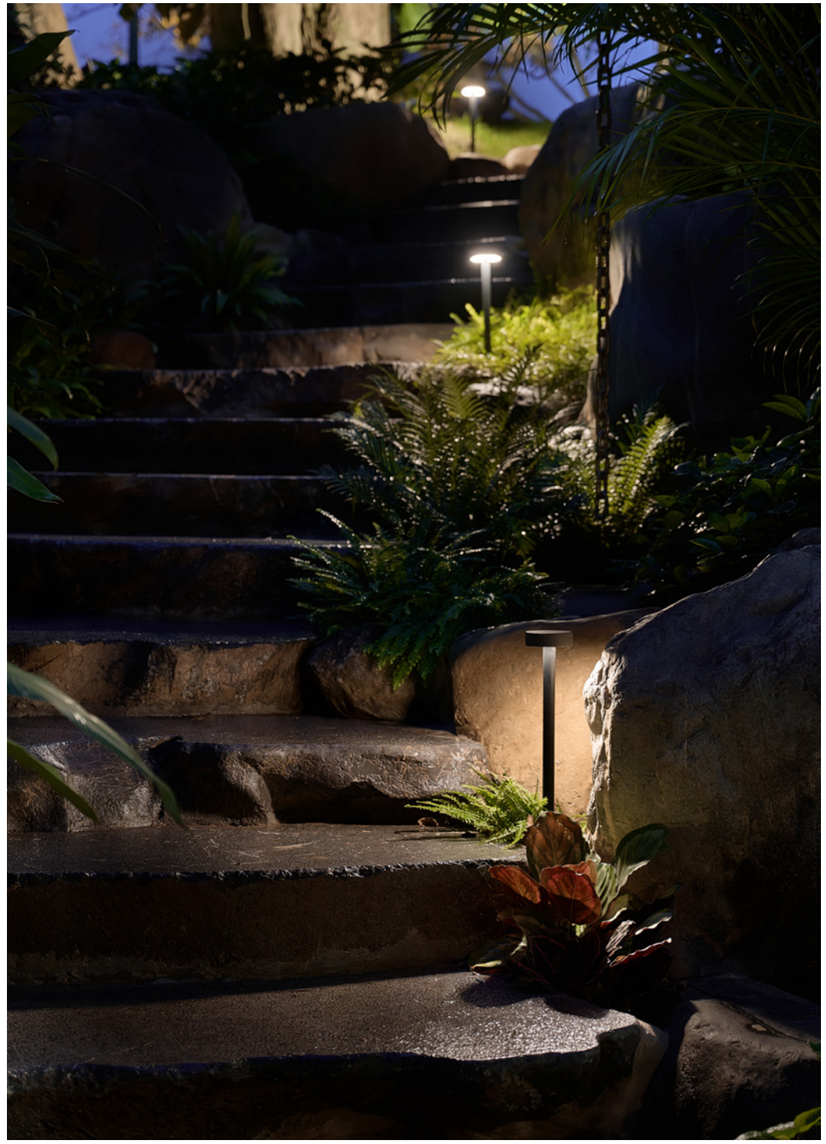



acces

sories



easy and fast installation with
quick connectors pre assembled
on our drivers and modules

DRIVER 180mA 7.5W DIM

7.5W | 180mA | 27-42V | phase-cut dim
220-240VAC | precabled 150mm wire
and quick connector to luminaire
50-60Hz
L/W/H 68x33x22
IP20 CE



EUR	CODE
33,00	

DRIVER 180mA 7.2W DALI

7.2W | 180mA | 10-40V | DALI-2 | push
dim | 220-240VAC | precabled 150mm
wire and quick connector to luminaire
50-60Hz
L/W/H 166x29x21
IP20 CE



EUR	CODE
64,50	

DRIVER 200mA 10W DIM

10W | 200mA | 30-42V | phase-cut dim
220-240VAC
50-60Hz | 10-100%
L/W/H 85x22x41
IP20 CE



EUR	CODE
33,00	

DRIVER 200mA 8W DALI

8W | 200mA | 10-40V | DALI-2 | push
dim | 220-240VAC | precabled 150mm
wire and quick connector to luminaire
50-60Hz | 1-100%
L/W/H 166x29x21

IP20 CE



EUR	CODE
64,50	

DRIVER 250mA 5W DIM

5W | 250mA |10-20V | phase-cut dim
220-240VAC | precabled with quick
connector to luminaire | wire through
50-60Hz
L/W/H 96x45x26
IP20 CE



EUR	CODE
33,00	

DRIVER 250mA 5W DIM

5W | 250mA |12-21V | phase-cut dim
220-240VAC | precabled with quick
connector to luminaire | 50-60Hz
L/W/H 68x33x22
IP20 CE



EUR	CODE
33,00	

DRIVER 250mA 5W DIM

5W | 250mA | 12-21V | phase-cut dim
220-240VAC | precabled with quick
connector to luminaire | 3 pole wire
through box | 50-60Hz
L/W/H 68x33x22
IP20 CE



	EUR	CODE
1 pc.	41,00	
20 pcs.	656,00	9

DRIVER 250mA 10.5W DIM

10.5W | preset at 250mA | 26-42V
phase-cut dim | 220-240VAC
50-60Hz | 10-100%
L/W/H 122x41x23
IP20 CE



EUR	CODE
33,00	

DRIVER 250mA 10W DALI

10W | 250mA | 10-40V | DALI-2
push dim | 220-240VAC | precabled
with 150mm wire and quick
connector to luminaire | 50-60Hz
L/W/H 166x29x21
IP20 CE



EUR	CODE
64,50	

DRIVER 250mA 10W DALI

10W | 250mA | 10-40V | DALI-2
push dim | 220-240VAC | precabled
with 150mm wire and quick
connector to luminaire | wire through
50-60Hz
L/W/H 185x30x21
IP20 CE



	EUR	CODE
1 pc.	72,50	
20 pcs.	1160,00	9

DRIVER 350mA 3.5W

3.5W | 350mA | 2.7-10V
220-240VAC | 50-60Hz
L/W/H 65x29x18
IP20



	EUR	CODE
	34,00	

DRIVER 350mA 6W

6W | 350mA | 8.6-18V
100-240VAC | precabled with quick connector to luminaire | 50-60Hz
L/W/H 66x39x22
IP20



	EUR	CODE
	25,50	

DRIVER 350mA 6W

6W | 350mA | 8.6-18V
100-240VAC | precabled with quick connector to luminaire | 3 pole wire through box | 50-60Hz
L/W/H 66x39x22
IP20



	EUR	CODE
1 pc.	33,50	
20 pcs.	536,00	9

DRIVER 350mA 7.7W

7.7W | 350mA | 3-22V
200-240VAC | 50-60Hz
L/W/H 68x35x21
IP20



	EUR	CODE
	35,00	

DRIVER 350mA 7W DIM

7W | 350mA | 10-20V | phase-cut dim
220-240VAC | precabled with quick connector to luminaire | wire through
50-60Hz
L/W/H 96x45x26
IP20



	EUR	CODE
	35,50	

DRIVER 350mA 7W DIM

7W | 350mA | 12-21V | phase-cut dim
220-240VAC | precabled with quick connector to luminaire | 50-60Hz
L/W/H 68x33x22
IP20



	EUR	CODE
	33,50	

DRIVER 350mA 7W DIM

7W | 350mA | 12-21V | phase-cut dim
220-240VAC | precabled with quick connector to luminaire | 3 pole wire through box | 50-60Hz
L/W/H 68x33x22
IP20



	EUR	CODE
1 pc.	41,50	
20 pcs.	664,00	9

DRIVER 350mA 10W DIM

10W | 350mA | 13-26V | phase-cut dim
220-240VAC | precabled with quick connector to luminaire | 50-60Hz
L/W/H 115x41x25
IP20



	EUR	CODE
	35,50	

DRIVER 350mA 10W DIM

10W | 350mA | 13-26V | phase-cut dim
220-240VAC | precabled 150mm wire and quick connector to luminaire
3 pole wire through box | 50-60Hz
L/W/H 115x41x25
IP20



	EUR	CODE
1 pc.	43,50	
20 pcs.	696,00	9

DRIVER 350mA 10W DIM

10W | 350mA | 14-28V | 1-10V
phase-cut dim | 220-240VAC | 50-60Hz
10-100%
L/W/H 102x51x30
IP20



	EUR	CODE
	30,50	

DRIVER 350mA 13W DIM

13W | 350mA | 26-38V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 138x44x30
IP20



	EUR	CODE
	42,50	

DRIVER 350mA 14.7W DIM

14.7W | 350mA | 26-42V | phase-cut dim
220-240VAC | 50-60Hz
10-100%
L/W/H 125x41x23
IP20



	EUR	CODE
	37,50	

DRIVER 350mA 14W DALI

14W | preset at 350mA | 10-40V
DALI-2 | push dim | 220-240VAC
precabled 150mm wire and quick connector to luminaire | 50-60Hz
1-100%
L/W/H 166x29x21
IP20 68 85 | 78 73 | 88 65



	EUR	CODE
	64,50	

DRIVER 350mA 14W DALI

14W | preset at 350mA | 10-40V
DALI-2 | push dim | 220-240VAC
precabled 150mm wire and quick connector to luminaire | wire through
50-60Hz | 1-100%
L/W/H 185x30x21
IP20



	EUR	CODE
1 pc.	72,50	
20 pcs.	1160,00	9

DRIVER 350mA 4.2W IP66

4.2W | 350mA | 3-12V
90-264VAC | 50-60Hz
L/W/H 38x29x23
IP66



	EUR	CODE
	35,00	

DRIVER 350mA 17W IP68

17W | 350mA | 5-49V
220-240VAC | 50-60Hz
L/W/H 122x54x26
IP68



	EUR	CODE
	69,00	

DRIVER 350mA 4.5W DIM IP44

4.5W | 350mA | 8-13V | phase-cut dim
220-240VAC | 50-60Hz | 5-100%
L/W/H 38x30x20
IP44



	EUR	CODE
	33,00	

DRIVER 350/500/700mA 17.5-20W

350/500/700mA output selection
17.5W | 350mA | 25-50V
20W | 500mA | 20-40V
20W | 700mA | 14-28.5V
220-240VAC | 50-60Hz
L/W/H 102x51x30
IP20



	EUR	CODE
	39,00	

DRIVER 350/500/700mA 17-32W DIM

350/500/700mA | dipswitch selection
17W | 350mA | 2-47V
24W | 500mA | 2-47V
32W | 700mA | 2-46V
phase-cut dim | not for ambient dim
220-240VAC | 50-60Hz | push dim
L/W/H 166x46x34
IP20



	EUR	CODE
	62,00	

DRIVER 500mA 6W
6W | 500mA | 3-12V
90-264VAC | 50-60Hz
L/W/H 68x35x21
IP20 CE UL



	EUR	CODE
	33,00	

DRIVER 500mA 10W
10W | 500mA | 13-20V
220-240VAC | precabled with quick connector to luminaire | 50-60Hz
L/W/H 60x39x20
IP20 CE



	EUR	CODE
	25,50	

DRIVER 500mA 10W
10W | 500mA | 13-20V
220-240VAC | precabled with quick connector to luminaire | 3 pole wire through box | 50-60Hz
L/W/H 60x39x20
IP20 CE



	EUR	CODE
1 pc.	33,50	
20 pcs.	536,00	9

DRIVER 500mA 6.5W DIM
6.5W | preset at 500mA
7-13V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 122x41x23
IP20 CE



	EUR	CODE
	25,50	

DRIVER 500mA 10W DIM
10W | 500mA | 10-20V | phase-cut dim
220-240VAC | precabled with quick connector to luminaire | wire through 50-60Hz
L/W/H 96x45x26
IP20 CE



	EUR	CODE
	37,50	

DRIVER 500mA 10W DIM
10W | 500mA | 12-21V | phase-cut dim
220-240VAC | precabled with quick connector to luminaire | 50-60Hz
L/W/H 115x41x25
IP20 CE



	EUR	CODE
	37,50	

DRIVER 500mA 10W DIM
10W | 500mA | 12-21V | phase-cut dim
220-240VAC | precabled with quick connector to luminaire | 3 pole wire through box | 50-60Hz
L/W/H 115x41x25
IP20 CE



	EUR	CODE
1 pc.	45,50	
20 pcs.	728,00	9

DRIVER 500mA 19W DIM
19W | preset at 500mA
26-38V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 138x44x30
IP20 CE



	EUR	CODE
	45,50	

DRIVER 500mA 10W 1-10V DIM
10W | 500mA | 10-20V | 1-10V dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 102x51x30
IP20 CE UL



	EUR	CODE
	35,50	

DRIVER 500mA 15W DALI
15W | 500mA |10-31V | DALI-2
push dim | 220-240VAC | precabled with 150mm wire and quick connector to luminaire | wire through
50-60Hz 10-100%
L/W/H 166x29x21
IP20 CE



	EUR	CODE
	64,50	

DRIVER 500mA 15W DALI
15W | 500mA |10-31V | DALI-2
push dim | 220-240VAC | precabled with 150mm wire and quick connector to luminaire | wire through
50-60Hz 10-100%
L/W/H 185x30x21
IP20 CE



	EUR	CODE
1 pc.	72,50	
20 pcs.	1160,00	9

DRIVER 500mA 24W DALI
24W | preset at 500mA | 6-49V
DALI-2 | push dim | 220-240VAC
precabled with quick connector to luminaire | 50-60Hz | 1-100%
L/W/H 143x43x30
IP20 CE



	EUR	CODE
	67,00	

DRIVER 500mA 7W IP67
7W | 500mA | 5-14.5V
100-240VAC | 47-63Hz
L/W/H 57x41x24
IP67 CE



	EUR	CODE
	46,50	

DRIVER 500mA 24W IP68
24W | 500mA | 5-49V
220-240VAC | 50-60Hz
L/W/H 122x54x26
IP68 CE



	EUR	CODE
	74,00	

back

DRIVER 700mA 6W
6W | 700mA | 3-8.4V
230-240VAC | 50-60Hz
L/W/H 68x35x21
IP20



EUR CODE
34,50

DRIVER 700mA 10W DIM
10W | preset at 700mA
8-14V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 122x41x23
IP20



EUR CODE
37,50

DRIVER 700mA 14W DIM
14W | preset at 700mA
12-20V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 122x41x23
IP20



EUR CODE
39,00

DRIVER 700mA 20W DIM
20W | preset at 700mA
15-28V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 138x44x30
IP20



EUR CODE
45,50

DRIVER 700mA 25W DIM
25W | 700mA | 17-35V | phase-cut dim
220-240VAC | 50-60Hz | 5-100%
L/W/H 145x51x30
IP20



EUR CODE
47,50

DRIVER 700mA 30W DIM
30W | preset at 700mA
26-42V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 138x44x30
IP20



EUR CODE
47,50

DRIVER 700mA 28W DALI
28W | preset at 700mA | 6-40V
DALI-2 | push dim | 220-240VAC
precabled with quick connector to
luminaire | 50-60Hz | 1-100%
L/W/H 97x43x30
IP20



EUR CODE
67,00

DRIVER 700mA 7W IP67
7W | 700mA | 3-10.5V
90-295VAC | 47-63Hz
L/W/H 57x41x24
IP67 0.07kg



EUR CODE
36,50

DRIVER 24V/15W
15W | 24V
220-240VAC | 50-60Hz
L/W/H 107x33x22
IP20



EUR CODE
39,00

DRIVER 24V/25W
2.4-25W | 24V | phase-cut dim | trailing
edge only | 220-240VAC | 50-60Hz
L/W/H 128x52x30
IP20



EUR CODE
46,00

DRIVER 24V/35W
35W | 24V | PWM dim
220-240VAC | 50-60Hz
L/W/H 142x43x30
IP20



EUR CODE
42,00

DRIVER 24V/50W
12-50W | 24V | phase-cut dim | trailing
edge only | 220-240VAC | 50-60Hz
L/W/H 166x52x32
IP20



EUR CODE
68,00

DRIVER 24V/100W
100W | 24V | PWM dim
220-240VAC | 50-60Hz
L/W/H 295x43x30
IP20



EUR CODE
73,80

DRIVER 24V/100W DALI
100W | 24V | DALI
220-240VAC | 50-60Hz
L/W/H 295x43x30
IP20



EUR CODE
155,00

DRIVER 24V/35W IP67
35W | 24V
100-277VAC | 50-60Hz
L/W/H 199x42x43
IP67



EUR CODE
49,00

DRIVER 24V/100W IP67
100W | 24V
100-277VAC | 50-60Hz
L/W/H 178x68x39
IP67



EUR CODE
144,60

WIRE THROUGH CONNECTOR BOX

3 pole
L/W/H 105x58x30
IP20 min.66 CE



EUR	CODE
15,00	

WIRE THROUGH CONNECTOR BOX

3 pole + DALI
L/W/H 105x58x30
IP20 min.66 CE



EUR	CODE
17,50	

WIRE THROUGH CONNECTOR BOX

3 pole IP68 | quick IP connection box with Gel included
L/W/H 90x43x20
IP68 min.48 CE

EUR	CODE
36,00	

PAR16 FLAT HEAD

PAR16 | GU10
220-240VAC | 50-60Hz
IP20 CE



EUR	CODE
8,00	

CONNECTION BOX 3P PAR16

incl. strain relief | 3 pole push connector | incl. PAR16 socket
incl. through-wiring
L/W/H 75x35x25



EUR	CODE
12,00	

DALI TO PHASE-CUT DIMMING MODULE

for converting a DALI signal to phase-cut dim | for max. 20 devices
LED | 10-300W | 230V
L/W/H 120x30x22
IP20 CE

EUR	CODE
224,00	

DIMMER DIN RAIL

max. 200W LED | 230V
phase-cut dim
L/W/H 17x55x90
IP30 CE



EUR	CODE
158,00	

DIMMER FOR SWITCH

max. 200W LED | 230V
phase-cut dim
L/W/H 48x18x46
IP30 CE



EUR	CODE
124,00	

LED MODULE HO

12W | 350mA | 35Vf
1800-3000K | CRI >90 | 1050lm
compatibility on request
IP20 CE M-26°



	EUR	CODE
	76,00	
	76,00	

LED MODULE HO 2700K

12W | 350mA | 35Vf
2700K | CRI >90 | 1340lm
compatibility on request
IP20 CE M-26°



	EUR	CODE
	76,00	
	76,00	

LED MODULE HO 3000K

12W | 350mA | 35Vf
3000K | CRI >90 | 1410lm
compatibility on request
IP20 CE M-26°



	EUR	CODE
	76,00	
	76,00	

LED MODULE HO 4000K

12W | 350mA | 35Vf
4000K | CRI >90 | 1420lm
compatibility on request
IP20 CE M-26°



	EUR	CODE
	76,00	
	76,00	

LED MODULE CABLE

extension cable between LED module and driver



	EUR	CODE
1m	5,50	
2m	6,50	
3m	7,50	

PAR16 LED 2700K

6.1W | GU10 | phase-cut dim | with lens
220-240VAC | 50-60Hz | aluminium
2700K | CRI >90 | 445lm
IP20 CE M-35°



	EUR	CODE
	16,50	
	16,50	

PAR16 LED 3000K

6.1W | GU10 | phase-cut dim | with lens
220-240VAC | 50-60Hz | aluminium
3000K | CRI >90 | 465lm
IP20 CE M-35°



	EUR	CODE
	16,50	
	16,50	

PAR16 LED HE 2700K

5W | GU10 | 106 lm/W | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 530lm
IP20 CE M-35°



	EUR	CODE
	19,50	
	19,50	

PAR16 LED HE 3000K

5W | GU10 | 107 lm/W | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 535lm
IP20 CE M-35°



	EUR	CODE
	19,50	
	19,50	

PAR16 LED 2700K

3.7W | GU10
220-240VAC | 50-60Hz
2700K | CRI >80 | 350lm
IP20 CE M-36°



	EUR	CODE
	13,00	

PAR16 LED 3000K

3.7W | GU10
220-240VAC | 50-60Hz
3000K | CRI >80 | 350lm
IP20 CE M-36°



	EUR	CODE
	13,00	

METAL SPRING CLIP

alternative front lamp fixation spring
for ø 50 lamp rings
LED | PAR16 | max. 12W
DEEP ADJUST | **DEEP** 2.0
PLANO | **STRANGE** ceiling
SOLID



	EUR	CODE
	2,00	

SPRING CLIP

lamp fixation | push-in system
for ø 50 lamp rings
LED | PAR16 | max. 12W
DEEP ADJUST | **DEEP** 2.0
PLANO | **STRANGE** ceiling
SOLID

	EUR	CODE
	2,00	
	2,00	
	2,00	
	2,00	
	2,00	
	2,00	

PAR11 LED 2700K

4.3W | GU10 | phase-cut dim | with lens
220-240VAC | 50-60Hz | aluminium
2700K | CRI >90 | 240lm
IP20 CE W-50°



	EUR	CODE
	14,50	
	14,50	

PAR11 LED 3000K

4.3W | GU10 | phase-cut dim | with lens
220-240VAC | 50-60Hz | aluminium
3000K | CRI >90 | 255lm
IP20 CE W-50°



	EUR	CODE
	14,50	
	14,50	

back

QT14 LED 3000K
3W | G9
220-240VAC | 50-60Hz
3000K | CRI >80 | 300lm
IP20 CE



	EUR	CODE
clear	14,50	

QT14 LED 2700K
3.5W | G9
220-240VAC | 50-60Hz
2700K | CRI >90 | 340lm
IP20 CE



	EUR	CODE
opal	18,00	

QT14 LED 3000K
3.5W | G9 | phase-cut dim
220-240VAC | 50-60Hz
3000K | CRI >90 | 350lm
IP20 CE



	EUR	CODE
opal	18,00	

C35 LED 2700K
5.5W | E14 | phase-cut dim | 20-100%
220-240VAC | 50-60Hz
2700K | CRI >90 | 450lm
IP20 CE



	EUR	CODE
opal	10,50	

ST64 LED 2200K DIM
5.9W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | CRI >95 | 435lm
IP20 CE



	EUR	CODE
gold tinted	35,00	

T25-85 LED 2200K
5W | E14 | phase-cut dim
220-240VAC | 50-60Hz
2200K | CRI >90 | 460lm
IP20 CE



	EUR	CODE
gold tinted	29,00	

T25-85 LED 2500K
5W | E14 | phase-cut dim
220-240VAC | 50-60Hz
2500K | CRI >90 | 480lm
IP20 0.02kg CE



	EUR	CODE
gold tinted	29,00	

T25-85 LED 2700K
5W | E14 | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 500lm
IP20 CE



	EUR	CODE
gold tinted	29,00	

T30-225 LED 2200K
5.3W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | CRI >90 | 380lm
IP20 CE



	EUR	CODE
gold tinted	39,00	

T30-225 LED 2700K
5.3W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 425lm
IP20 CE



	EUR	CODE
gold tinted	39,00	

T30-300 LED 2200K
7.2W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | CRI >90 | 585lm
IP20 CE



	EUR	CODE
gold tinted	43,00	

T30-300 LED 2700K
7.4W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 610lm
IP20 CE



	EUR	CODE
gold tinted	43,00	

back

A60 LED 2700K DIM
5.6W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 480lm
IP20 CE



	EUR	CODE
clear	31,00	

A60 LED 2700K
9W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 800lm
IP20 CE



	EUR	CODE
opal	14,50	

A65 LED 2700K
14.6W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 1375lm
IP20 CE



	EUR	CODE
opal	22,00	

A60 LED 2200K
3.8W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | CRI >95 | 245lm
IP20 CE



	EUR	CODE
gold tinted	31,00	

A60 LED 2700K
5.5W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 405lm
IP20 CE



	EUR	CODE
gold mirror	32,00	
silver mirror	32,00	

G95 LED 2700K
4.5W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 375lm
IP20 CE



	EUR	CODE
clear	33,00	

G95 LED 2700K
11.2W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 1100lm
IP20 CE



	EUR	CODE
opal	29,00	

G95 LED 2700K
10W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 1060lm
ceramic soft look
IP20 CE



	EUR	CODE
opal	33,00	

G95 LED 2200K
5.4W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | CRI >95 | 380lm
IP20 CE



	EUR	CODE
gold tinted	33,00	

G95 LED 2200K
5.1W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | CRI >95 | 370lm
IP20 CE



	EUR	CODE
gold mirror	35,00	

G95 LED 2700K
5W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 395/410lm
IP20 CE



	EUR	CODE
gold mirror	35,00	
silver mirror	35,00	

G125 LED 2200K
6.2W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | CRI >95 | 450lm
IP20 CE



	EUR	CODE
gold tinted	34,00	

REPLACEMENT PLUG
for Switzerland | Liechtenstein



	EUR	CODE
	22,00	

REPLACEMENT PLUG
for UK | Ireland | Malta | Arabic peninsila



	EUR	CODE
	22,00	

HONEYCOMB LOUVER



	EUR	CODE
	14,50	

HONEYCOMB LOUVER



	EUR	CODE
	14,50	

HONEYCOMB LOUVER



	EUR	CODE
	16,00	

HONEYCOMB LOUVER



	EUR	CODE
	17,50	

inner cover for 1.6



	EUR	CODE
	29,00	
	29,00	
	29,00	

TRIMLESS DRILLING TOOL
for easy plaster finish



	EUR	CODE
	39,00	

COVER PLATE ADAPTER
for concrete housings



	EUR	CODE
	12,50	

flaps for adjustable beam angle
white | for BOX/RAY QT14 only



	EUR	CODE
	39,00	

wall/base spacer for overlapping luminaires



	EUR	CODE
	31,00	

snoot



	EUR	CODE
	35,00	

ROUND
wall/base spacer for overlapping luminaires



	EUR	CODE
	31,00	

snoot
round



	EUR	CODE
	35,00	

back

TRIMLESS | BLIEK PETIT
TRIMLESS | QITO TRIMLESS
aluminium plasterkit

78-80 80 12.5, 15, 20, 25



EUR	CODE
22,00	

TRIMLESS aluminium plasterkit

105-110 12.5, 15, 20, 25



EUR	CODE
26,00	

TRIMLESS 1.0
aluminium plasterkit

64x64 7-32



EUR	CODE
37,00	

TRIMLESS 2.0
aluminium plasterkit

64x117 7-32



EUR	CODE
39,00	

TRIMLESS 3.0
aluminium plasterkit

64x169 7-32



EUR	CODE
43,00	

TRIMLESS 1.0
TRIMLESS 1.0 aluminium plasterkit

86x86 7-32



EUR	CODE
41,00	

TRIMLESS 2.0
TRIMLESS 2.0 aluminium plasterkit

156x86 7-32



EUR	CODE
45,00	

plasterkit



EUR	CODE
16,50	

PLASTERKITS

Accessories

Accessories

plasterkit



EUR CODE

19,00

plasterkit



EUR CODE

26,50

always use in combination with plasterkit

122x90 45



EUR CODE

26,50

0.4 | 0.7 recessed housing
incl. plasterkit

75x75 65



EUR CODE

24,00

2.2
recessed housing incl. plasterkit

251x76 65



EUR CODE

43,00

0.7 | 2.0 concrete housing

192x58 60



EUR CODE

38,00

0.8 | 0.8 concrete housing

70x70 65



EUR CODE

32,00

1.3 | 1.3 concrete housing

122x122 60



EUR CODE

39,00

2.0
concrete housing

123x191 60



EUR CODE

42,00

0.7 | 2.0 recessed housing
incl. plasterkit

191x58 75



EUR CODE

45,00

0.8 | 0.8 recessed housing
incl. plasterkit

70x70 80



EUR CODE

46,00

1.3 | 1.3 recessed housing
incl. plasterkit

122x122 75



EUR CODE

52,00

2.0
recessed housing incl. plasterkit

123x191 75



EUR CODE

58,00

0.6 | 0.6 |
TRIMLESS ground housing

137 110



EUR CODE

25,00

0.9 | 0.9 ground housing

137 130



EUR CODE

34,00

1.2 | 1.2 1.2 | 1.2
ground housing

190 158



EUR CODE

47,00

1.6 | 1.6 1.6 | 1.6
ground housing

220 184



EUR CODE

61,00

back

SINGLE/MULTI BASE max. 25W | const. volt. | 24V phase-cut dim | W/H ø62x102 polycarbonate



	EUR	CODE
	55,00	
	55,00	

MULTI BASE max. 50W | const. volt. | 24V phase-cut dim | W/H ø200x38 polycarbonate



	EUR	CODE
	75,00	
	75,00	

CABLE CONNECTOR cable from one luminaire to another incl. plugs



	EUR	CODE
0.3m	14,50	
0.6m	19,00	
0.9m	23,00	
1.2m	27,00	

FIX CONNECTOR electrical | mechanical | straight central suspension



	EUR	CODE
	24,00	

BLACK DIFFUSER only for 1.0



	EUR	CODE
2m	14,00	
3m	21,00	

BLACK DIFFUSER only for 3.0



	EUR	CODE
2m	17,00	
3m	23,00	

MINI CONNECTOR strip to strip - continuous



	EUR	CODE
IP20	2,60	

MINI CONNECTOR strip to wire



	EUR	CODE
IP20	1,80	

MINI CONNECTOR strip to strip



	EUR	CODE
IP20	3,30	

DRIVER 48V/100W
100W | 48V
220-240VAC | 50-60Hz
L/W/H 350x30x18
IP20



	EUR	CODE
	89,00	

DRIVER 48V/150W
150W | 48V
220-240VAC | 50-60Hz
L/W/H 350x30x18
IP20



	EUR	CODE
	108,00	

DRIVER 48V/250W
250W | 48V
220-240VAC | 50-60Hz
L/W/H 400x40x22
IP20



	EUR	CODE
	135,00	

DALI SELV DEVICE for 48V system | max. 300W | 48VDC L/W/H 212x37x26



	EUR	CODE
	158,00	

RECESSED
track | custom cuts | 48V | 15A | DALI



		EUR	CODE
	< 1m	129,00	904111W0CC
	< 1m	129,00	904111B0CC
	< 2m	249,00	904112W0CC
	< 2m	249,00	904112B0CC
	< 3m	363,00	904113W0CC
	< 3m	363,00	904113B0CC

CC = for lengths specifications please add four digits in mm

SURFACE
track | custom cuts | 48V | 15A | DALI



		EUR	CODE
	< 1m	103,00	904211W0CC
	< 1m	103,00	904211B0CC
	< 2m	188,00	904212W0CC
	< 2m	222,00	904212L0CC
	< 2m	222,00	904212M0CC
	< 2m	222,00	904212Q0CC
	< 2m	188,00	904212B0CC
	< 3m	272,00	904213W0CC
	< 3m	323,00	904213L0CC
	< 3m	323,00	904213M0CC
	< 3m	323,00	904213Q0CC
	< 3m	272,00	904213B0CC

CC = for lengths specifications please add four digits in mm

SUSPENDED
track | custom cuts | 48V | 15A | DALI



		EUR	CODE
	< 1m	103,00	904211W0CC
	< 1m	103,00	904211B0CC
	< 2m	188,00	904212W0CC
	< 2m	222,00	904212L0CC
	< 2m	222,00	904212M0CC
	< 2m	222,00	904212Q0CC
	< 2m	188,00	904212B0CC
	< 3m	272,00	904213W0CC
	< 3m	323,00	904213L0CC
	< 3m	323,00	904213M0CC
	< 3m	323,00	904213Q0CC
	< 3m	272,00	904213B0CC

CC = for lengths specifications please add four digits in mm

SUSP. INDIRECT LIGHT
track | custom cuts | 48V | 15A | DALI
3000K | CRI >90 | 14W/m | 950lm/m with indirect light



		EUR	CODE
	< 2m	595,00	904512W5CC
	< 2m	595,00	904512B5CC
	< 3m	695,00	904513W5CC
	< 3m	695,00	904513B5CC

CC = for lengths specifications please add four digits in mm

TRACK ADAPTER 1.0 HV
no space for driver | cable diameter max. 10mm | for suspended luminaires without steel wire
incl. strain relief
max. weight 10kg



	EUR	CODE
	15,00	
■	15,00	

TRACK ADAPTER 2.0 HV
no space for driver | cable diameter max. 5mm | for suspended luminaires without steel wire
incl. strain relief
max. weight 3kg



	EUR	CODE
	16,00	
■	16,00	

ADJUSTABLE CORNER



	EUR	CODE
	38,00	
■	38,00	

COVERPLATE I/L/T/X
only use with recessed tracks



	EUR	CODE
	8,00	
■	8,00	

COVERPLATE END FEEDS
only use with recessed tracks



	EUR	CODE
	9,50	
■	9,50	

X-FEED



	EUR	CODE
	49,00	
■	49,00	

T-FEED 1.0
top view



	EUR	CODE
	44,00	
■	44,00	

T-FEED 2.0
top view



	EUR	CODE
	44,00	
■	44,00	

T-FEED 3.0
top view



	EUR	CODE
	44,00	
■	44,00	

T-FEED 4.0
top view



	EUR	CODE
	44,00	
■	44,00	

CUTTING TOOL
for cutting the inner copper cables of 3-phase track and 48V track
CE TÜV



	EUR	CODE
■	112,00	

TRACK ADAPTER HV
no space for driver | cable diameter max. 6.6mm | for suspended luminaires without steel wire
incl. strain relief
max. weight 5kg



	EUR	CODE
	16,00	
■	16,00	

TRACK ADAPTER LV
DALI-2 | 350mA | incl. driver



	EUR	CODE
	90,00	
■	90,00	

OPLIA TRACK ADAPTER LV
DALI-2 | 250mA | incl. driver



	EUR	CODE
	90,00	
■	90,00	

POWER OUTLET
10A | 220-250V | 50-60Hz
Schuko adapter
PC UL94V0 + copper 50N
L/W/H 85x54x103
IP20 CE

	EUR	CODE
	38,00	
■	38,00	

HOOK
max. weight 5kg



	EUR	CODE
	9,00	
■	9,00	

FLEXIBLE CONNECTOR



	EUR	CODE
	74,00	
■	74,00	

X-FEED



	EUR	CODE
	95,00	
■	95,00	

T-FEED 1.0
top view



	EUR	CODE
	76,00	
■	76,00	

T-FEED 2.0
top view



	EUR	CODE
	76,00	
■	76,00	

T-FEED 3.0
top view



	EUR	CODE
	76,00	
■	76,00	

T-FEED 4.0
top view



	EUR	CODE
	76,00	
■	76,00	

SUSPENSION OPTIONS

STRAIN RELIEF
for suspended luminaire power cable fixation in base



	EUR	CODE
	2,80	

CABLE WALL/CEILING BRACKET
for cable 4.25-5.5mm diameter



	EUR	CODE
	11,50	
	11,50	

SINGLE BASE LV
DALI-2 | 350mA | incl. driver



	EUR	CODE
	110,00	
	110,00	

SINGLE BASE LV DALI-2 | 250mA | incl. driver



	EUR	CODE
	110,00	
	110,00	

MULTI CHANDELIER LV
3 luminaires | 3x175mA
phase-cut dim | incl. driver
always use with hooks



	EUR	CODE
	260,00	
	300,00	
	260,00	
	260,00	
	260,00	

MULTI CHANDELIER LV
6 luminaires | 6x175mA
phase-cut dim | incl. driver
always use with hooks



	EUR	CODE
	295,00	
	335,00	
	295,00	
	295,00	
	295,00	

MULTI CHANDELIER LV
9 luminaires | 9x175mA
phase-cut dim | incl. driver
always use with hooks



	EUR	CODE
	330,00	
	370,00	
	330,00	
	330,00	
	330,00	

MULTI CHANDELIER HV
1-9 luminaires | always use with hooks



	EUR	CODE
	235,00	
	275,00	
	235,00	
	235,00	
	235,00	

HOOK
always use for MULTI CHANDELIER



	EUR	CODE
	19,00	
	19,00	

HOOK
for cable 4.25-5.5mm diameter | for single and multi suspension | also for textile cable



	EUR	CODE
	18,00	
	18,00	

HOOK
standard multi suspension hook for ø5 plugs



	EUR	CODE
	4,50	
	4,50	

HOOK
optional multi suspension hook for ø6 plugs



	EUR	CODE
	4,80	
	4,80	

cable wall bracket
only for WIRO textile cable



	EUR	CODE
	20,00	

CABLE PLUG & PLAY E27
LED 4-25W | connector set for one shade | black textile cable | incl. cable plug with dimmer | 2 cable brackets included



	EUR	CODE
8.5m	168,00	

DECENTER SET 1.0 A60
max. 60W | E27
220-240VAC | 50-60Hz
suspension set for 1 shade
round ceiling base | black textile cable
1 base + 1 end stop included



	EUR	CODE
2.6m	108,00	
6m	118,00	

DECENTER SET 2.0 2x A60
max. 60W | E27
220-240VAC | 50-60Hz
suspension set for 2 shades
round ceiling base | black textile cable
1 multibase + 2 end stops included



	EUR	CODE
2.6m	198,00	
6m	228,00	

DECENTER SET 3.0 3x A60
max. 60W | E27
220-240VAC | 50-60Hz
suspension set for 3 shades
round ceiling base | black textile cable
1 multibase + 3 end stops included



	EUR	CODE
2.6m	286,00	
6m	336,00	

DECENTER SET 4.0 4x A60
max. 60W | E27
220-240VAC | 50-60Hz
suspension set for 4 shades
round ceiling base | black textile cable
1 multibase + 4 end stops included



	EUR	CODE
2.6m	368,00	
6m	418,00	

BASE
replacement for 1.0, 2.0 for central steel wire mounting



	EUR	CODE
	245,00	
	245,00	
	245,00	
	245,00	
	245,00	

CONNECTORS cable from
one luminaire to another incl. plugs | only for 2.1, 3.2, 3.2.1



	EUR	CODE
0.3m	14,50	
0.3m	14,50	
0.3m	14,50	
0.6m	19,00	
0.6m	19,00	
0.6m	19,00	

CONNECTORS cable from
one luminaire to another incl. plugs | only for 2.1, 3.2, 3.2.1



	EUR	CODE
0.9m	23,00	
0.9m	23,00	
0.9m	23,00	
1.2m	27,00	
1.2m	27,00	
1.2m	27,00	

back

POLE 400 straight pole | incl. ground spike



	EUR	CODE
	114,00	
	114,00	

POLE 600 straight pole | incl. ground spike



	EUR	CODE
	125,00	
	125,00	

POLE 800 straight pole | incl. ground spike



	EUR	CODE
	138,00	
	138,00	

POLE 400 straight pole | incl. ground spike



	EUR	CODE
	103,00	
	103,00	

POLE 600 straight pole | incl. ground spike



	EUR	CODE
	115,00	
	115,00	

POLE 800 straight pole | incl. ground spike



	EUR	CODE
	128,00	
	128,00	

POLE 400 curved pole | incl. ground spike



	EUR	CODE
	142,00	
	142,00	

POLE 600 curved pole | incl. ground spike



	EUR	CODE
	144,00	
	144,00	

POLE 800 curved pole | incl. ground spike



	EUR	CODE
	155,00	
	155,00	

fixation plate



EUR	CODE
22,00	

POLE 200 with fixation plate | 3.0, 4.0



	EUR	CODE
	34,00	
	34,00	

POLE 400 with fixation plate | 3.0, 4.0



	EUR	CODE
	38,00	
	38,00	

ground spike



EUR	CODE
27,00	

POLE 600 with fixation plate | 3.0, 4.0



	EUR	CODE
	41,00	
	41,00	

ground spike



EUR	CODE
29,00	

back

ROUND 1.0 POLE 250
pole with fixation plate



	EUR	CODE
	58,00	
	58,00	

ROUND 1.0 POLE 450
pole with fixation plate



	EUR	CODE
	69,00	
	69,00	

ROUND 1.0 POLE 650
pole with fixation plate



	EUR	CODE
	88,00	
	88,00	

ROUND 2.0 POLE 250 pole
with fixation plate



	EUR	CODE
	58,00	
	58,00	

ROUND 2.0 POLE 450 pole
with fixation plate



	EUR	CODE
	69,00	
	69,00	

ROUND 2.0 POLE 650 pole
with fixation plate



	EUR	CODE
	88,00	
	88,00	

CARRÉ 1.0 POLE 250 pole
with fixation plate



	EUR	CODE
	66,00	
	66,00	

CARRÉ 1.0 POLE 450 pole
with fixation plate



	EUR	CODE
	77,00	
	77,00	

CARRÉ 1.0 POLE 650 pole
with fixation plate



	EUR	CODE
	96,00	
	96,00	

CARRÉ 2.0 POLE 250 pole
with fixation plate



	EUR	CODE
	66,00	
	66,00	

CARRÉ 2.0 POLE 450 pole
with fixation plate



	EUR	CODE
	77,00	
	77,00	

CARRÉ 2.0 POLE 650 pole
with fixation plate



	EUR	CODE
	96,00	
	96,00	

POLE 170
with fixation plate
PALOS ROUND | **PALOS CARRÉ**



	EUR	CODE
	98,00	
	98,00	
	98,00	

POLE 170
with concrete ground fixation
PALOS ROUND | **PALOS CARRÉ**



	EUR	CODE
	124,00	
	124,00	
	124,00	

POLE 270
with fixation plate
PALOS ROUND | **PALOS CARRÉ**



	EUR	CODE
	108,00	
	108,00	
	108,00	

POLE 270
with concrete ground fixation
PALOS ROUND | **PALOS CARRÉ**



	EUR	CODE
	136,00	
	136,00	
	136,00	

POLE 470
with fixation plate
PALOS ROUND | **PALOS CARRÉ**



	EUR	CODE
	123,00	
	123,00	
	123,00	

POLE 470
with concrete ground fixation
PALOS ROUND | **PALOS CARRÉ**



	EUR	CODE
	148,00	
	148,00	
	148,00	

POLE 670
with fixation plate
PALOS ROUND | **PALOS CARRÉ**



	EUR	CODE
	136,00	
	136,00	
	136,00	

POLE 670
with concrete ground fixation
PALOS ROUND | **PALOS CARRÉ**



	EUR	CODE
	162,00	
	162,00	
	162,00	

POLE 870
with fixation plate
PALOS ROUND | **PALOS CARRÉ**



	EUR	CODE
	155,00	
	155,00	
	155,00	

POLE 870
with concrete ground fixation
PALOS ROUND | **PALOS CARRÉ**



	EUR	CODE
	188,00	
	188,00	
	188,00	

back

POLE | GROUND FIXATION

Accessories

POLE 150 with
fixation plate



	EUR	CODE
	83,00	
	83,00	
	83,00	

POLE 350 with
fixation plate



	EUR	CODE
	109,00	
	109,00	
	109,00	

POLE 550 with
fixation plate



	EUR	CODE
	139,00	
	139,00	
	139,00	

ground spike



EUR	CODE
62,00	

concrete ground fixation



EUR	CODE
62,00	

PLUG & PLAY
DRIVER 24V/30W IP67
30W | 24V
220-240VAC | 50Hz
incl. 2.5m cable with 240V plug
incl. 2.5m cable with 24V male plug
CH and UK variants online
L/W/H 110x48x31
IP67 CE



EUR	CODE
99,00	

PLUG & PLAY
DRIVER 24V/75W IP67
75W | 24V
220-240VAC | 50Hz
incl. 2.5m cable with 240V plug
incl. 2.5m cable with 24V male plug
CH and UK variants online
L/W/H 129x49x32
IP67 CE



EUR	CODE
119,00	

PLUG & PLAY
EXTENSION CABLE
2x 24V male plug
IP67 H07RN-F CE



	EUR	CODE
0.5m	16,00	
1m	26,00	
2.5m	38,00	
5m	58,00	

PLUG & PLAY
STRAIGHT CONNECTOR
2x 24V female connector
IP67 H07RN-F CE



EUR	CODE
9,50	

PLUG & PLAY
T-CONNECTOR
3x 24V female connector
incl. 2 optional caps
IP67 CE



EUR	CODE
15,50	

back

icons standards

NO MORE MISUNDERSTANDINGS

ICON	ENGLISH	GERMAN	DUTCH	FRENCH	SPANISH	ITALIAN
	Cutout Round	Ausschnitt rund	Ronde inbouwopening	Découpe ronde	Corte circular	Taglio tondo
	Cutout Square	Ausschnitt eckig	Rechthoekige inbouwopening	Découpe rectangulaire	Corte rectangular	Taglio quadro
	Recessed Depth	Einbautiefe	Inbouwdiepte	Profondeur d'encastrement	Profundidad de empotramiento	Profondità dell'incasso
	Ceiling Thickness	Deckenstärke	Plafonddikte	Épaisseur du plafond	Espesar del techo	Spessore del soffitto
0°-X°/X°	Rotatable vertically | horizontally	Drehbar vertikal | horizontal	Draaibaar verticaal | horizontaal	Orientable verticalement | horizontalement	Orientable en vertical | horizontal	Orientabile in verticale | orizzontale
	Beam Angle	Abstrahlwinkel	Reflectorhoek	Faiseau	Ángulo de apertura	Fascio luminoso
N – M – W	narrow – medium – wide beamangle	engstrahlend - medium-strahlend - breitstrahlend	smal - medium - breed	étroit - moyen - large	estecho - medio - ancho	stretto - medio - largo
	Class 1 Fixture	Leuchte der Schutzklasse 1	Toestel klasse 1	Appareil classe 1	Aparato de clase 1	Lampada classe 1
	Class 2 Fixture	Leuchte der Schutzklasse 2	Toestel klasse 2	Appareil classe 2	Aparato de clase 2	Lampada classe 2
	Class 3 Fixture	Leuchte der Schutzklasse 3	Toestel klasse 3	Appareil classe 3	Aparato de clase 3	Lampada classe 3
IP 20	IP rating	IP Bewertung	IP-classificatie	Indice de protection	Grado IP	Grado di protezione IP
IP 44	Frontal IP rating	Frontale IP Bewertung	IP-classificatie	Évaluation IP frontale	Grado IP en parte frontal	Grado di protezione IP frontale
IK 06	IK rating	Schlagfestigkeit	IK-classificatie	IK rating	Grado IK	IK rating
UGR ≤ 19	Screen-compatible workplace light	Bildschirmtaugliche Arbeitsplatzleuchte	Werkplekverlichting is compatibel met beeldscherm	Éclairage compatible pour écran d'ordinateur	Iluminación para puestos de trabajo compatible con pantallas	Adatta per ambienti di lavoro | uffici
IC rated	IC rated: may be covered with insulation material	IC Rated: kann mit Isoliermaterial abgedeckt werden	IC classificatie: kan worden bedekt met isolatiemateriaal	Classé IC: peut être recouvert d'un matériau isolant	Clasificación IC: puede cubrirse con material aislante	Protezione IC. Può essere coperto con materiale isolante
L80 | 50K	LED Lifetime: Lumen output is minimum 80% after 50.000 hours	LED-Lebensdauer: Die Lichtausbeute nach 50.000 Stunden beträgt mindestens 80 %	Led-levensduur: de lichtopbrengst na 50.000 branduren is minimaal 80%	Durée de vie des LED : l'efficacité lumineuse au bout de 50 000 heures s'élève à 80 % minimum	Vida útil de los LED: la eficiencia luminosa tras 50.000 horas es de al menos el 80 %	Durata dei LED: l'efficienza luminosa è pari ad almeno l'80% dopo 50.000 ore di funzionamento

ICON	ENGLISH	GERMAN	DUTCH	FRENCH	SPANISH	ITALIAN
CE	CE conform	CE-konform	CE-conform	Conformité CE	Conformidad CE	Conformità CE
	ENEC Certificate	ENEC Zertifikat	ENEC Certificaat	Certificat ENEC	Certificado ENEC	Certificato ENEC
	UL Certificate	UL Zertifikat	UL Certificaat	Certificat UL	Certificado UL	Certificato UL
Kelvin	Colour Temperature	Farbtemperatur	Kleurtemperatuur	Température de couleur	Temperatura de color	Temperatura colore
Blue lines	Part not included	Teil nicht inkludiert	Onderdeel niet inbegrepen	Pièce non comprise	Parte no incluida	Articolo non incluso
	Up/Down	Aufwärts/abwärts strahlen	Licht boven of onder	Éclairage haut ou bas	Emisión superior/ inferior	Luce monoemissione sopra/sotto
	Up and Down	Aufwärts und abwärts strahlend	Licht boven en onder	Éclairage haut et bas	Emisión superior e inferior	Luce biemissione sopra/sotto
A - G	Energy labelling regulation	Verordnung über die Energiekennzeichnung	Energielabel	Règlement sur l'étiquetage énergétique	Reglamento sobre el etiquetado energético	Regolamento sull' etichettatura energetica
	Light source replaceable by end user	Lichtquelle durch Endverbraucher austauschbar	Lichtbron vervangbaar door eindgebruiker	Source lumineuse remplaçable par l'utilisateur final	Fuente luminosa sustituible por el usuario	Sorgente luminosa sostituibile dall'utente finale
	Light source not replaceable	Lichtquelle nicht austauschbar	Lichtbron niet vervangbaar	Source lumineuse non remplaçable	Fuente luminosa no sustituible	Sorgente luminosa non sostituibile
	Control gear replaceable by end user	Betriebsgerät durch Endverbraucher austauschbar	Driver vervangbaar door eindgebruiker	Dispositif de commande remplaçable par l'utilisateur final	Mecanismo de control sustituible por el usuario	Dispositivo di controllo sostituibile dall'utente finale
	Control gear not replaceable	Betriebsgerät nicht austauschbar	Driver niet vervangbaar	Dispositif de commande non remplaçable	Mecanismo de control no sustituible	Dispositivo di controllo non sostituibile
	Light source replaceable by authorized professional	Lichtquelle durch autorisierte Fachleute austauschbar	Lichtbron vervangbaar door een erkend vakman	Source lumineuse remplaçable par un professionnel agréé	Fuente luminosa sustituible por un técnico autorizado	Sorgente luminosa sostituibile da tecnici specializzati
	Control gear replaceable by authorized professional	Betriebsgerät durch autorisierte Fachleute austauschbar	Driver vervangbaar door een erkend vakman	Dispositif de commande remplaçable par un professionnel agréé	Mecanismo de controls ustituible por un técnico autorizado	Dispositivo di controllo sostituibile da tecnici specializzati

COLOURS AND MATERIALS

For specific information on colours and finishes please refer to

Depending on the product and application, the materialization may differ: For more informations on materials, finishes, structures, RAL and NCS colour codes, please check our product page on the website. RAL and NCS colour codes are always approximate and can be checked by the customer based on samples.

Outdoor

METAL

W White


D Grey


A Anthracite Grey


Q Bronze


G Gold


B Black


K Black and Gold


CL Classic Alu


CQ Classic Bronze


AB Antique Brass


I Inox | 304 Stainless steel electro polished

RECYCLED PET FELT

WF White

MF Marble Grey


LF Limestone


OF Oxide Red


IF Indigo Blue


AF Anthracite


F Grey

ALUMINIUM COMPOSITE MATERIAL


GB Black and Light Gold


NB Black and Black Chrome


LB Black and Glossy Aluminium

MARBLE


MB Black

MW White

Indoor

GLASS HANDBLOWN


TS Smoked Striped


TW Taupe White


DW Dark Taupe White


TD Smoked Diamond


YD Yellow Diamond


GD Green Diamond


BD Blue Diamond

FD Frosted Diamond | Opal


P Copper Plated


B Smoked

W White | Opal

HAJO GLASS

C Clear


W Sandblasted


A Amber


B Smoked

METAL


E White and Black


J White and Gold

H Champagne and Black

K Black and Gold

CH Black and Champagne

Z Black and Copper

GW Cement Grey and White

RR Coral Red and White

OTHERS

W White | LLDPE

3D PRINTED MATERIAL (IQ)

RP Recycled PET

W White ASA

B Black ASA

SG Silk grey ASA

METAL

LS Live Simple

SG Silk Grey

FJ Feel Jade

CC Come Closer

ME Mother Earth

YE Yellow CG01

RE Red CG01

AU Aubergine CG01

BE Blue CG01

B Black CG01

PLASTER

GW Give Warmth

ST Stay Together

FJ Feel Jade

RA Raw material for custom paint

METAL

W White

L Aluminium

G Gold

M Champagne

Q Bronze

P Copper

V Corton steel look

GM Gun metal

B Black

A Anodised Aluminium

T Tumbled Aluminium

LINE BRUSHED FINISH FOR METAL COLOURS

Line brushed