


Discreetly hidden in the ceiling, as a striking surface-mounted option, or floating reely in the room - with three mounting types you'll find the right solution for any space. Tip: sketch your project and note where the track should run and which zones you want to highlight for a clearer overview.

**CUSTOM CUT AVAILABLE**

Have a look on page 917

**CEILING RECESSED**




**RECESSED track**

48V | 15A | DALI


SELV 31-33 1.65 5-25

	EUR
1m	115,00
1m	115,00
2m	235,00
2m	235,00
3m	349,00
3m	349,00



**M | MOUNTING BRACKET**


recessed mounting bracket  
for 1m - 2pcs needed | for 2m - 4pcs  
needed | for 3m - 6pcs needed




	EUR	CODE
	12,50	90414110

**E | END CAP**

	EUR	CODE
	12,00	
	12,00	



**CEILING SURFACE**




**SURFACE track**

48V | 15A | DALI

SELV

	EUR
1m	89,00
1m	89,00
2m	174,00
2m	208,00
2m	208,00
2m	208,00
2m	174,00
3m	258,00
3m	309,00
3m	309,00
3m	309,00
3m	258,00




**E | END CAP**

	EUR
	7,50
	8,00
	8,00
	7,50



**CEILING SUSPENDED**

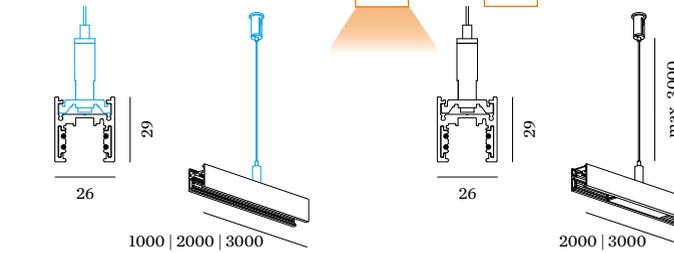

**SUSPENDED track**

48V | 15A | DALI

SELV

	EUR
1m	89,00
1m	89,00
2m	174,00
2m	208,00
2m	208,00
2m	208,00
2m	174,00
3m	258,00
3m	309,00
3m	309,00
3m	309,00
3m	258,00



**SUSP. INDIRECT**

track 48V | 15A | DALI | with indirect  
light | 3.0m suspension sets already  
included | 15W/m

SELV

3000K | CRI >90 | 1900lm

	EUR	CODE
2m	575,00	904512W5
2m	575,00	904512B5

3000K | CRI >90 | 2850lm

	EUR	CODE
3m	675,00	
3m	675,00	

**S | SUSPENSION SET**


complete suspension set | incl. ceiling  
fixation bracket | not needed for  
indirect light version | for 1m - 2pcs  
needed | for 2m - 3pcs needed  
for 3m - 4pcs needed

stainless steel colour

	EUR	CODE
max. 1.5m	29,00	904341I0
max. 3m	31,00	904342I0

black colour




	EUR	CODE
max. 1.5m	29,00	
max. 3m	31,00	



**E | END CAP**

	EUR
	7,50
	8,00
	8,00
	7,50



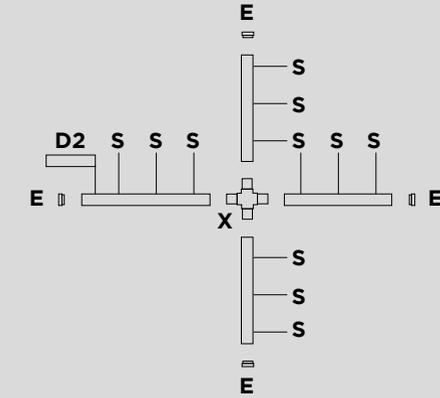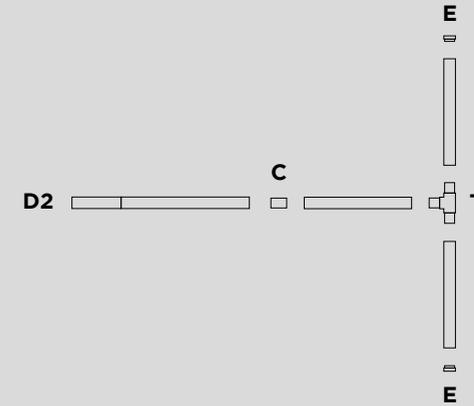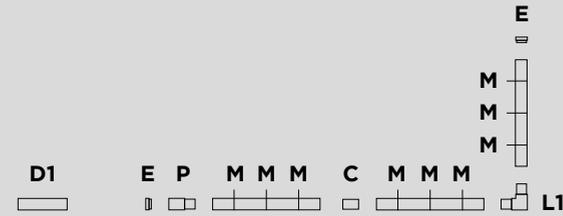


**M | S | E**  
Choose your mounting  
on page 312

**D | P**  
Choose your driver | power feed  
on page 316


**GOOD TO KNOW**  
Electrical components of champagne  
or bronze connectors and drivers will  
be black.

**ALL MOUNTINGS**



**BLANK COVER**

	EUR	CODE
2m	51,00	
2m	51,00	




**C | CONNECTOR**

48V | 15A | DALI | electrical/  
mechanical connector

	EUR	CODE
	40,00	
	40,00	


**CEILING RECESSED**



**L1 | L-CONNECTOR**

48V | 15A | DALI | electrical/  
mechanical connector left and right

	EUR	CODE
	181,00	
	181,00	




**L2 | L-CONNECTOR  
NON ELECTRICAL**

only needed 1x for square installation

	EUR	CODE
	181,00	
	181,00	


**CEILING SURFACE | SUSPENDED**



**L1 | L-CONNECTOR**

48V | 15A | DALI | electrical/  
mechanical connector left and right


	EUR	CODE
	118,00	
	121,00	
	121,00	
	118,00	



**L2 | L-CONNECTOR  
NON ELECTRICAL**

only needed 1x for square installation


	EUR	CODE
	118,00	
	121,00	
	121,00	
	118,00	



**T | T-CONNECTOR**

48V | 15A | DALI | electrical/  
mechanical connector

	EUR	CODE
	198,00	
	198,00	



**X | X-CONNECTOR**

48V | 15A | DALI | electrical/  
mechanical connector


	EUR	CODE
	224,00	
	224,00	

A driver regulates the current flowing through your LED lights, preventing overheating and unwanted flickering. Which is best suited to your system depends on the chosen installation. The most elegant solution is an in-track driver, but many other variants are also available.

**GOOD TO KNOW**

Electrical components of champagne or bronze connectors and drivers will be black.

**CEILING RECESSED | SURFACE**




**D1 | REMOTE DRIVER**

remote converter | 220-240VAC 50-60Hz | 48V | for connection to power feed adapter




	EUR
100W   48V	89,00
150W   48V	108,00

for more information see page 917




**D2 | IN LINE DRIVER SURFACE**

220-240VAC | 50-60Hz | 48V incl. power end feed adapter incl. DALI through wiring




	EUR
100W	278,00
100W	278,00
150W	288,00
150W	288,00




**D3 | IN TRACK DRIVER SURFACE**

220-240VAC | 50-60Hz | 48V incl. power end feed function with in line connection box




	EUR
100W	239,00
100W	242,00
100W	242,00
100W	239,00




**D4 | IN TRACK DRIVER SURFACE**

220-240VAC | 50-60Hz | 48V incl. power middle/end feed function with in track connection




	EUR
100W	228,00
100W	228,00

**CEILING SUSPENDED**




**D1 | CEILING DRIVER**

220-240VAC | 50-60Hz | 48V incl. power middle/end feed adapter incl. DALI through wiring driver ceiling mounted



	EUR
100W	298,00
100W	298,00
150W	318,00
150W	318,00




**D2 | IN LINE DRIVER**

220-240VAC | 50-60Hz | 48V incl. power end feed adapter incl. DALI through wiring suspended driver in line with profile




	EUR
100W	325,00
100W	325,00
150W	348,00
150W	348,00




**D3 | IN TRACK DRIVER**

220-240VAC | 50-60Hz | 48V incl. power end feed function incl. 3m power cable suspended driver in the profile




	EUR
100W	268,00
100W	271,00
100W	271,00
100W	268,00

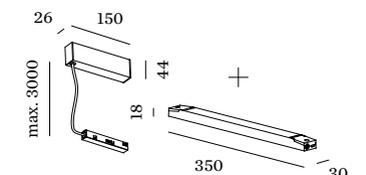


**D4 | REMOTE DRIVER**

220-240VAC | 50-60Hz | 48V incl. power end feed function incl. 3m power cable incl. remote driver




	EUR
100W	238,00
100W	238,00
150W	258,00
150W	258,00




**P | POWER FEED**

48V | 15A | DALI | end/middle power feed adapter | max. 4 x 1.5mm<sup>2</sup>


	EUR	CODE
	38,00	
	38,00	




	EUR	CODE
250W	279,00	
250W	282,00	
250W	282,00	
250W	279,00	



	EUR	CODE
250W	268,00	
250W	268,00	




	EUR	CODE
250W	315,00	
250W	315,00	

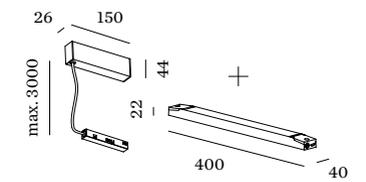

	EUR	CODE
250W	285,00	
250W	285,00	


# control

48V system

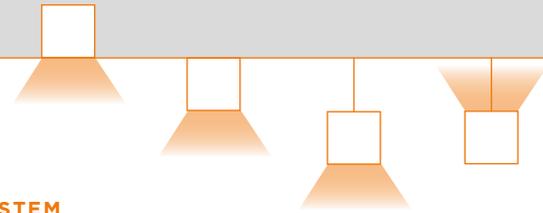

## ALL MOUNTINGS

## HOW TO CONTROL MY SYSTEM




### WIRELESS CASAMBI CONTROL



8W | adapter for wireless control of 64 DALI fixtures in max. 8 groups

	EUR	CODE
	515,00	904491W0
	515,00	904491B0

Qu'est-ce qui rend le système 4 si intéressant ? Il offre d'innombrables possibilités. Allumer ou varier l'intensité de vos luminaires est très simple avec DALI. Et si vous ne souhaitez pas installer un système câblé, optez pour une configuration plus flexible – il vous suffit d'un module de commande Casambi et d'inserts DALI compatibles.

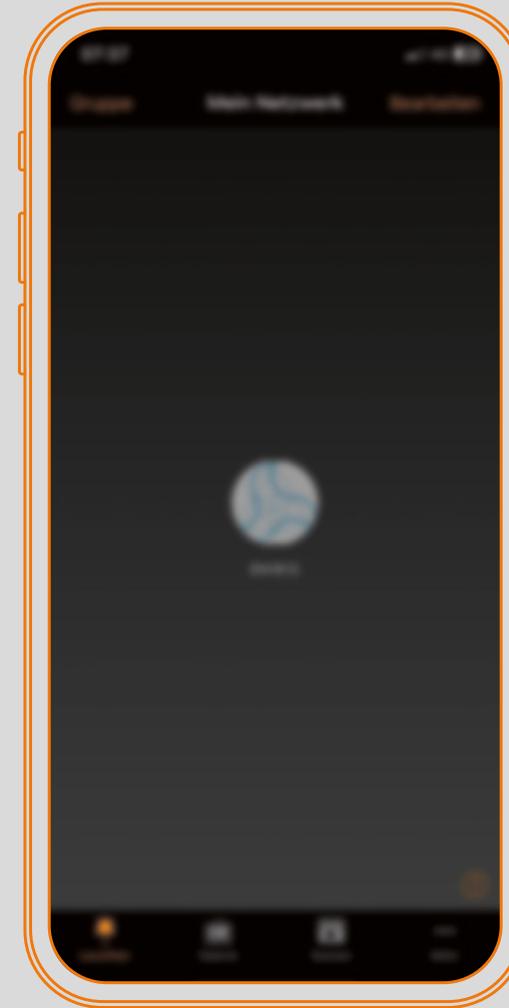

CREATE A SCENE FOR YOUR INDIVIDUAL LIGHTING SOLUTION



### 1.0

LED COB 10W | 48V  
aluminium | PC adapter

IP20 0-90°|355° M-31° L70|55K

non dim

	EUR
	168,00
	168,00
	168,00
	168,00
	168,00

DALI-2

	EUR
	255,00
	255,00
	255,00
	255,00
	255,00



### OPTIONAL

honeycomb louver

	EUR
	14,50

LIGHT COLOUR	LUMEN CRI	CODE
2700K	480 >90	3
3000K	510 >90	5

accessories on page 910

### 2.0

LED COB 17W | 48V  
aluminium | PC adapter

IP20 0-90°|355° M-31° L70|55K

non dim



	EUR
	258,00
	258,00
	258,00
	258,00
	258,00

DALI-2

	EUR
	335,00
	335,00
	335,00
	335,00
	335,00


LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x480 >90	3
3000K	2x510 >90	5

accessories on page 910

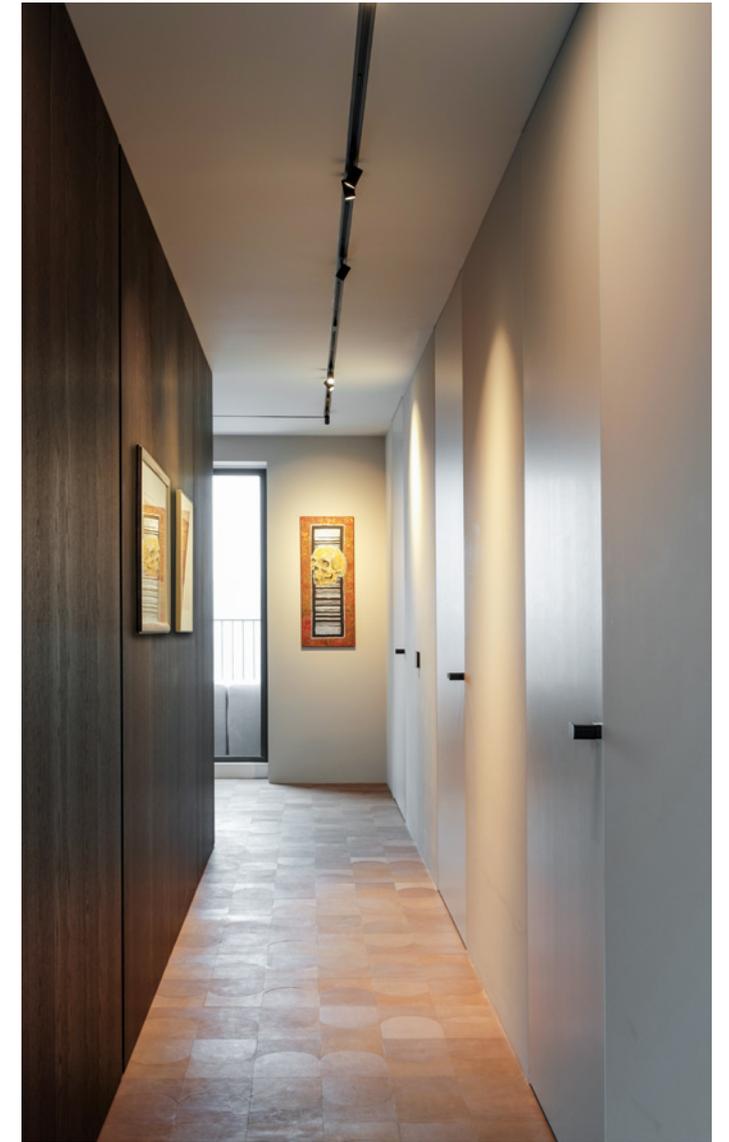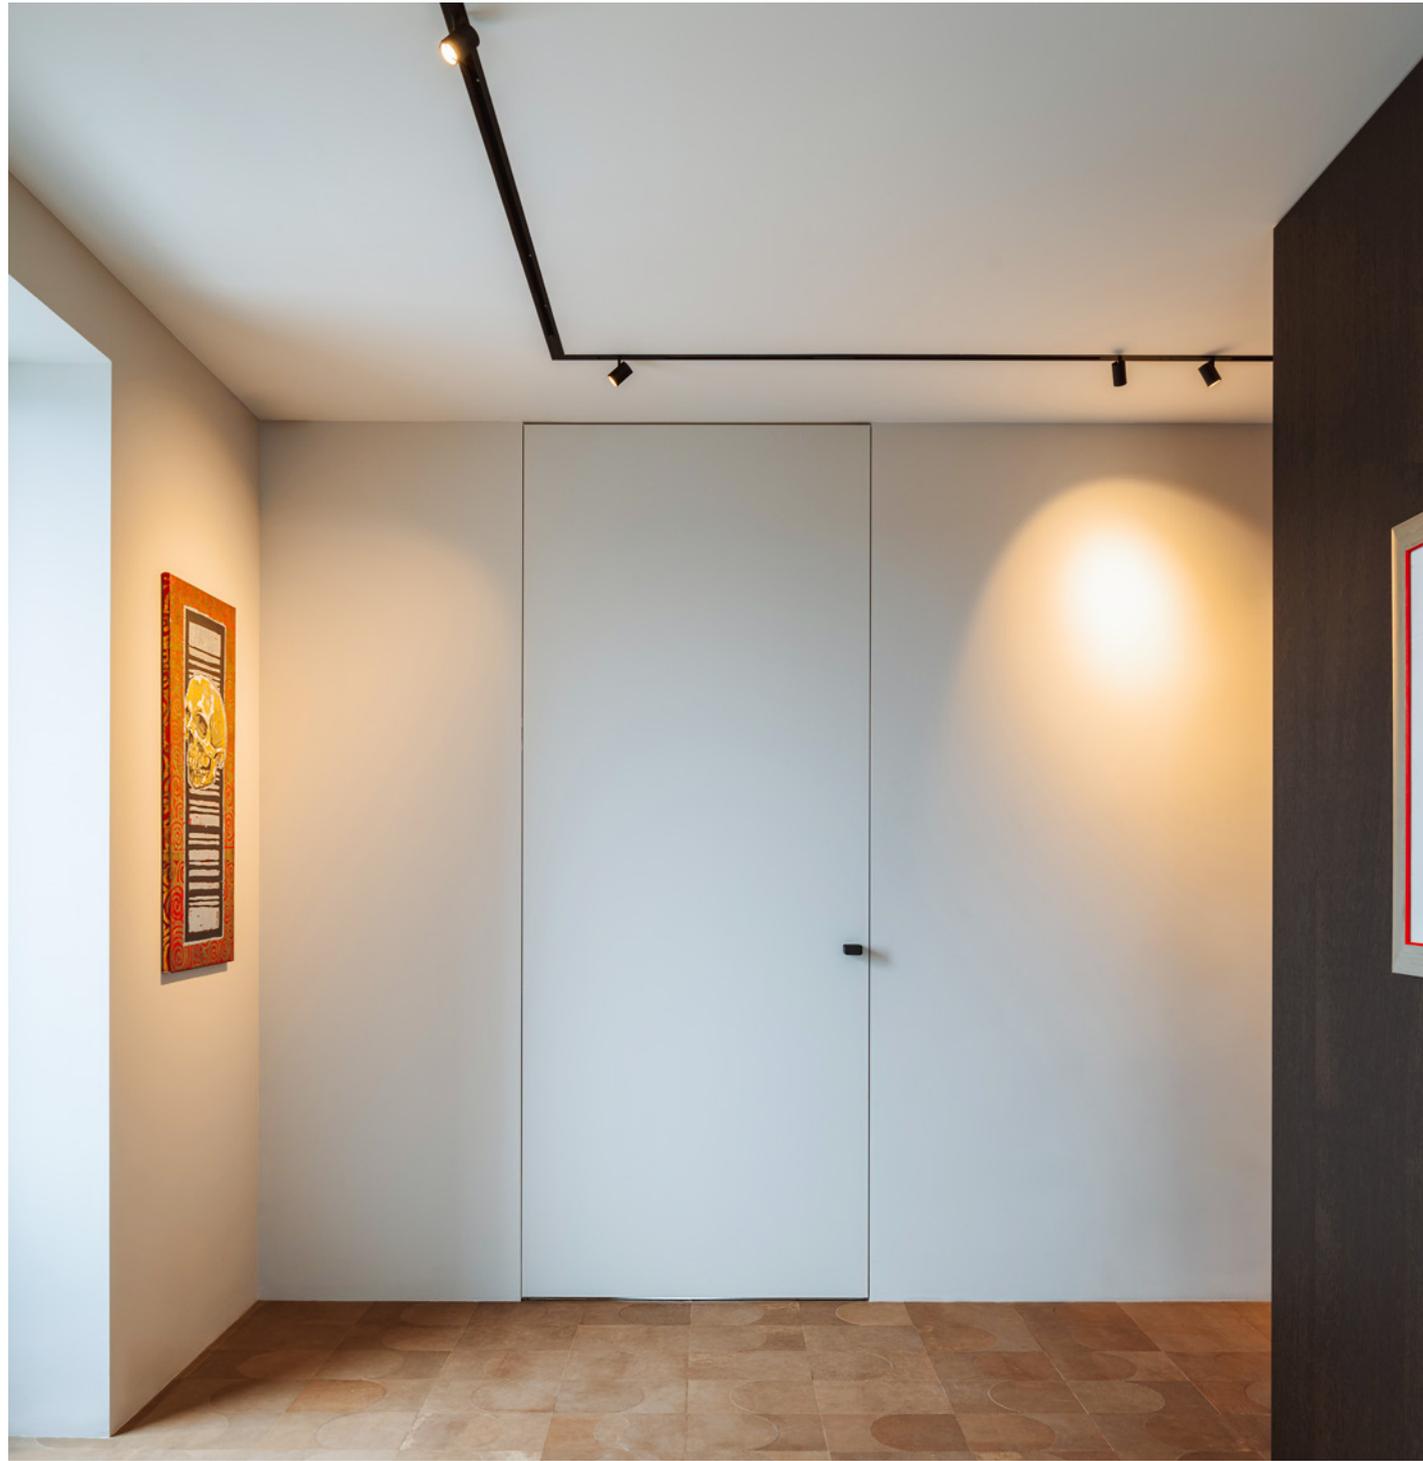



48V system



### 1.0

LED COB 7W | 48V  
aluminium | PC adapter


IP20 0-90°/350° M-31° L80/50K

non dim

	EUR
	178,00
	178,00
	178,00

DALI-2

	EUR
	264,00
	264,00
	264,00



### OPTIONAL


honeycomb louver

	EUR
	14,50

LIGHT COLOUR	LUMEN CRI	CODE
2700K	585 >90	3
3000K	620 >90	5



48V system



## 1.0

LED COB 7W | 48V  
aluminium | glass | PC adapter

IP20 0-90°|350° M-25° L80|50K

non dim

	EUR	CODE
	176,00	.....
	176,00	.....
	176,00	.....
	176,00	.....
	176,00	.....

DALI-2

	EUR	CODE
	262,00	.....
	262,00	.....
	262,00	.....
	262,00	.....
	262,00	.....



LIGHT COLOUR	LUMEN CRI	CODE
2700K	560 >90	3
3000K	575 >90	5







48V system

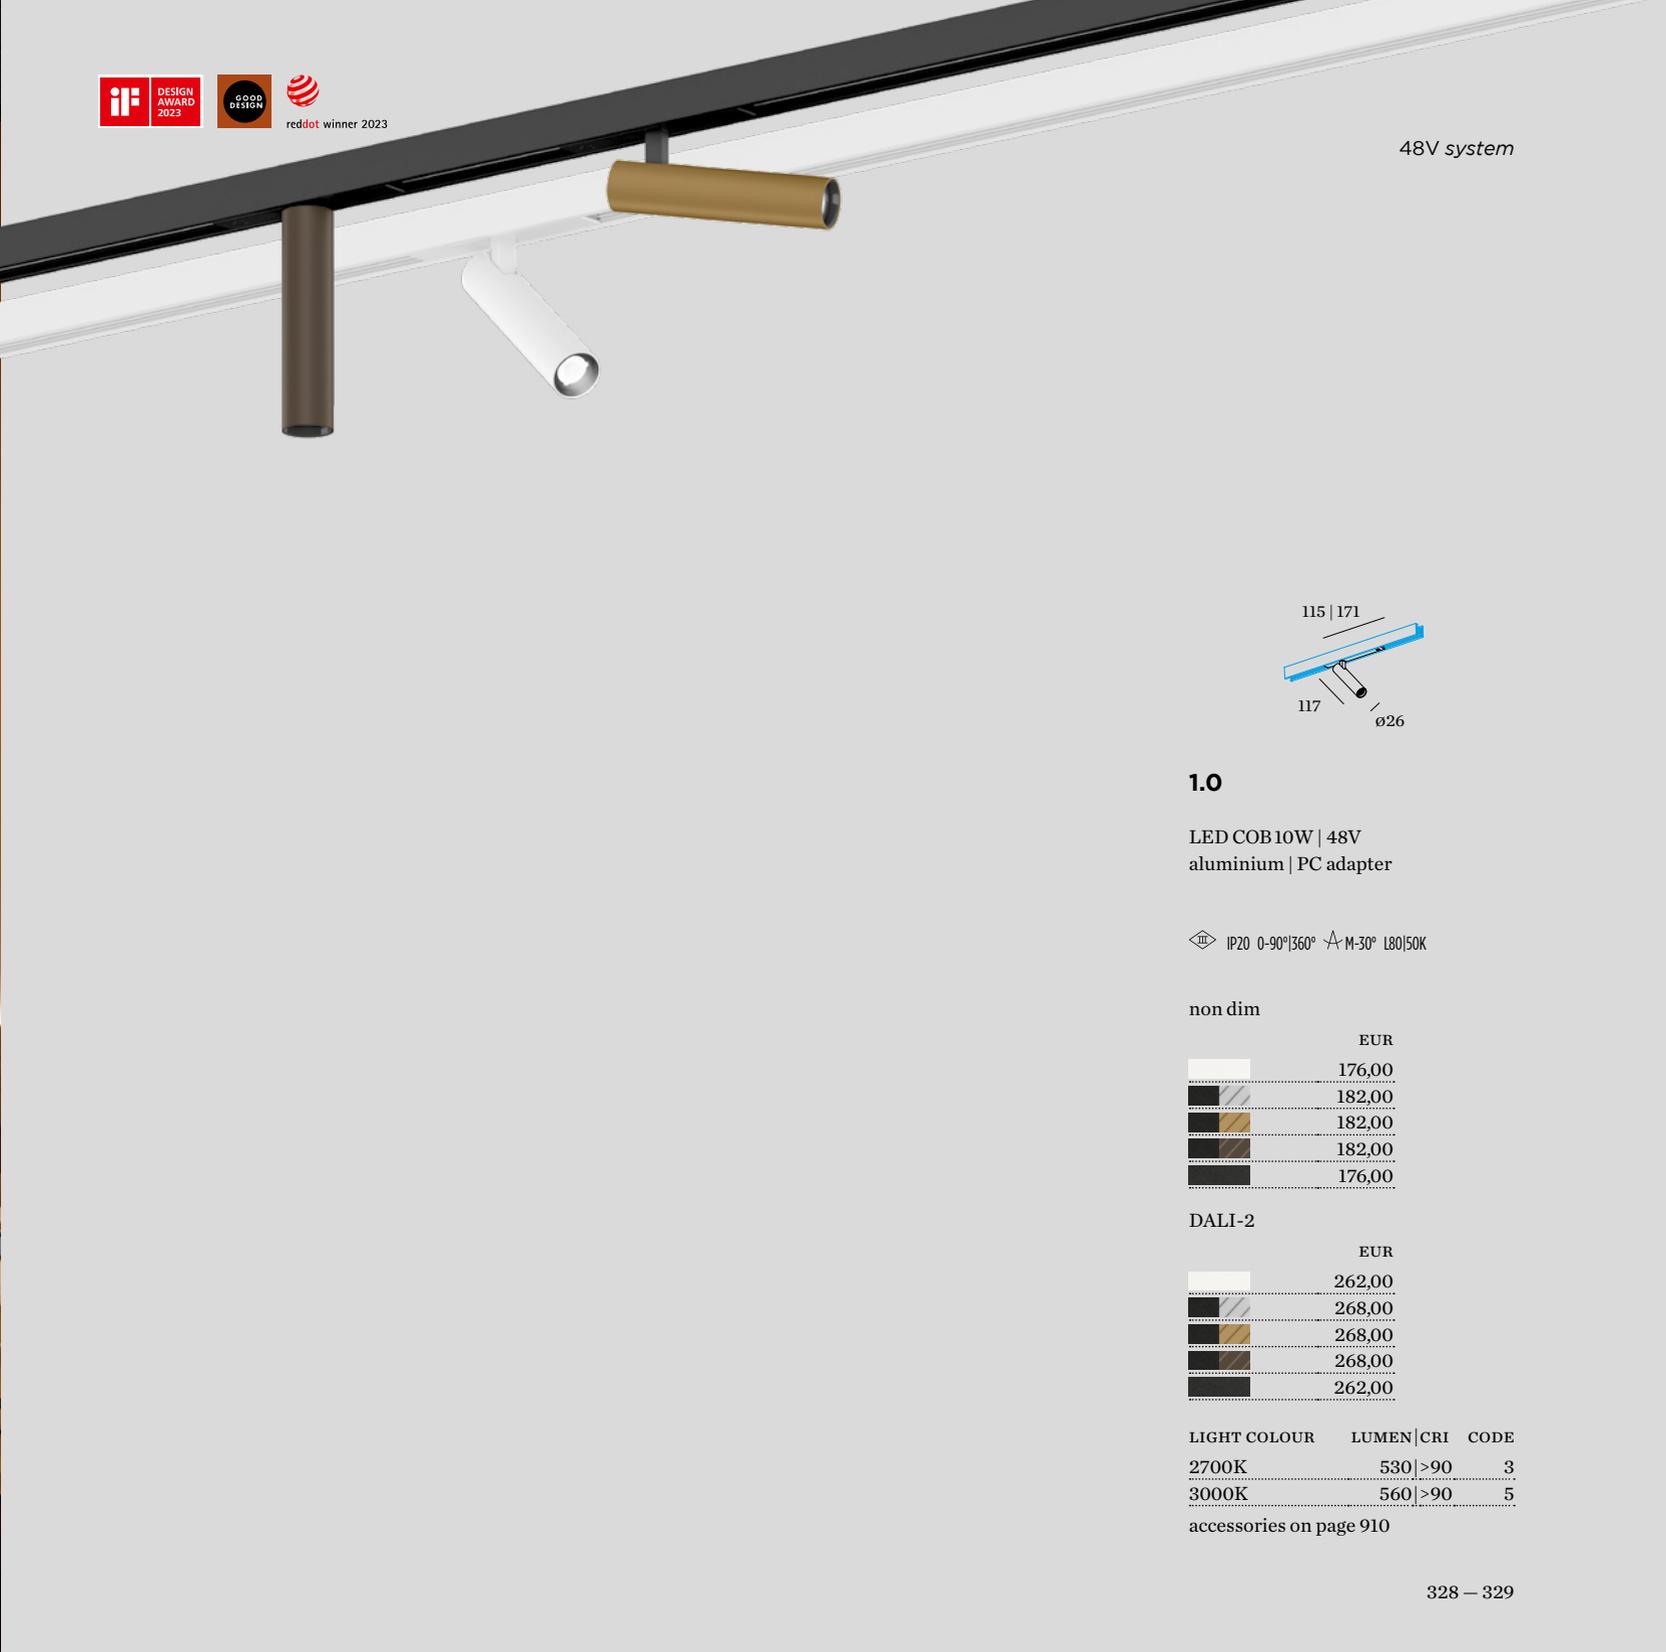

**1.0**

LED COB 10W | 48V  
aluminium | PC adapter

IP20 0-90°|360° A M-30° L80|50K

non dim

	EUR
	176,00
	182,00
	182,00
	182,00
	176,00

DALI-2


	EUR
	262,00
	268,00
	268,00
	268,00
	262,00

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	530	>90	3
3000K	560	>90	5

accessories on page 910



48V system



### 1.0

LED PCB 5W | 48V  
aluminium | PC adapter

IP20 0-90°|355° A M-30° 180|50K


non dim

	EUR
	125,00
	125,00
	125,00

DALI-2

	EUR
	185,00
	185,00
	185,00



LIGHT COLOUR	LUMEN CRI	CODE
2700K	326 >90	3
3000K	336 >90	5

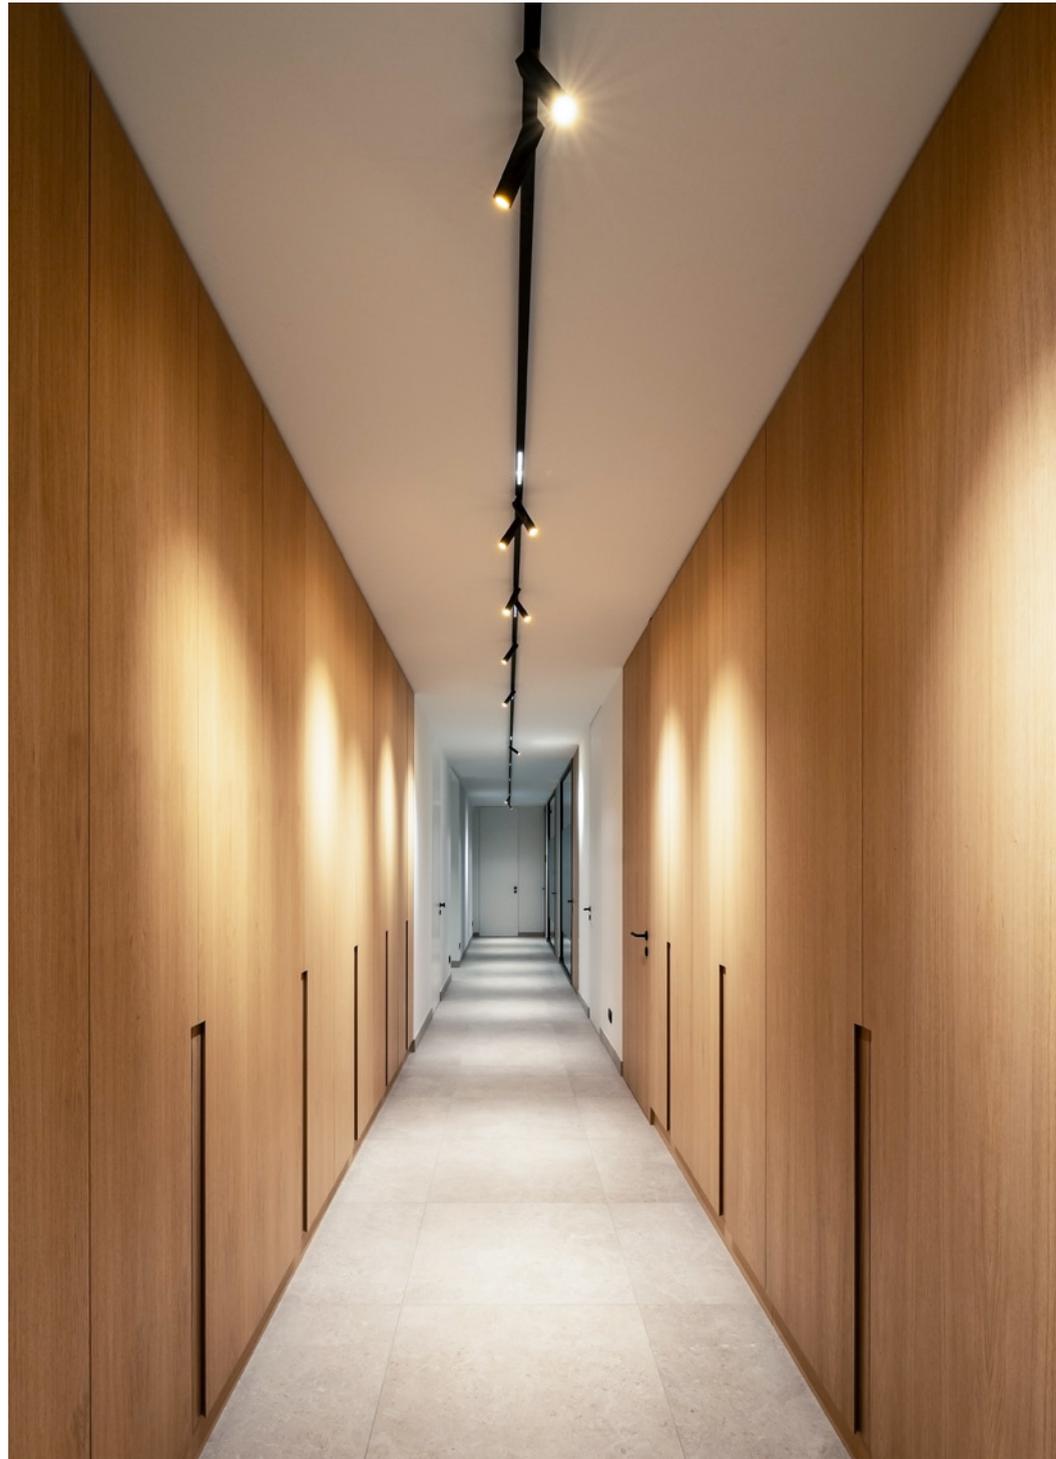

reddot winner 2020  
lighting design



48V system



### 1.0

LED COB 13W | 48V  
aluminium | PC adapter

IP20 0-90°|360° M-23° L80|50K

non dim

	EUR
	189,00
	189,00

DALI-2

	EUR
	285,00
	285,00

LIGHT COLOUR	LUMEN CRI	CODE
2700K	415 >90	3
3000K	435 >90	5

accessories on page 910

### 2.0

LED COB 22W | 48V  
aluminium | PC adapter

IP20 0-90°|360° M-23° L80|50K

non dim


	EUR
	282,90
	282,90

DALI-2

	EUR
	389,00
	389,00

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x445 >90	3
3000K	2x465 >90	5

accessories on page 910



### 1.0

LED COB 9W | 48V  
aluminium

IP20 M-25° 180/55K

adapter | 2700K | CRI >90 | 505lm

	EUR	CODE
	188,00	.....
	188,00	.....
	DALI-2 236,00	.....
	DALI-2 236,00	.....


adapter | 3000K | CRI >90 | 535lm


	EUR	CODE
	188,00	.....
	188,00	.....
	DALI-2 236,00	.....
	DALI-2 236,00	.....

housing | inner reflector colour


	CODE
	W
	WM
	E
	M
	H
	Q
	CH
	B

only for ceiling surface and suspended tracks

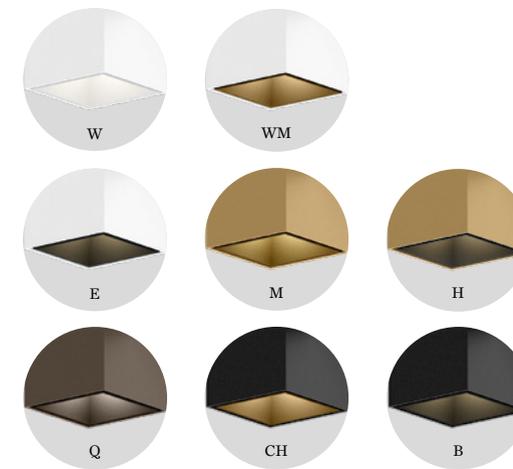

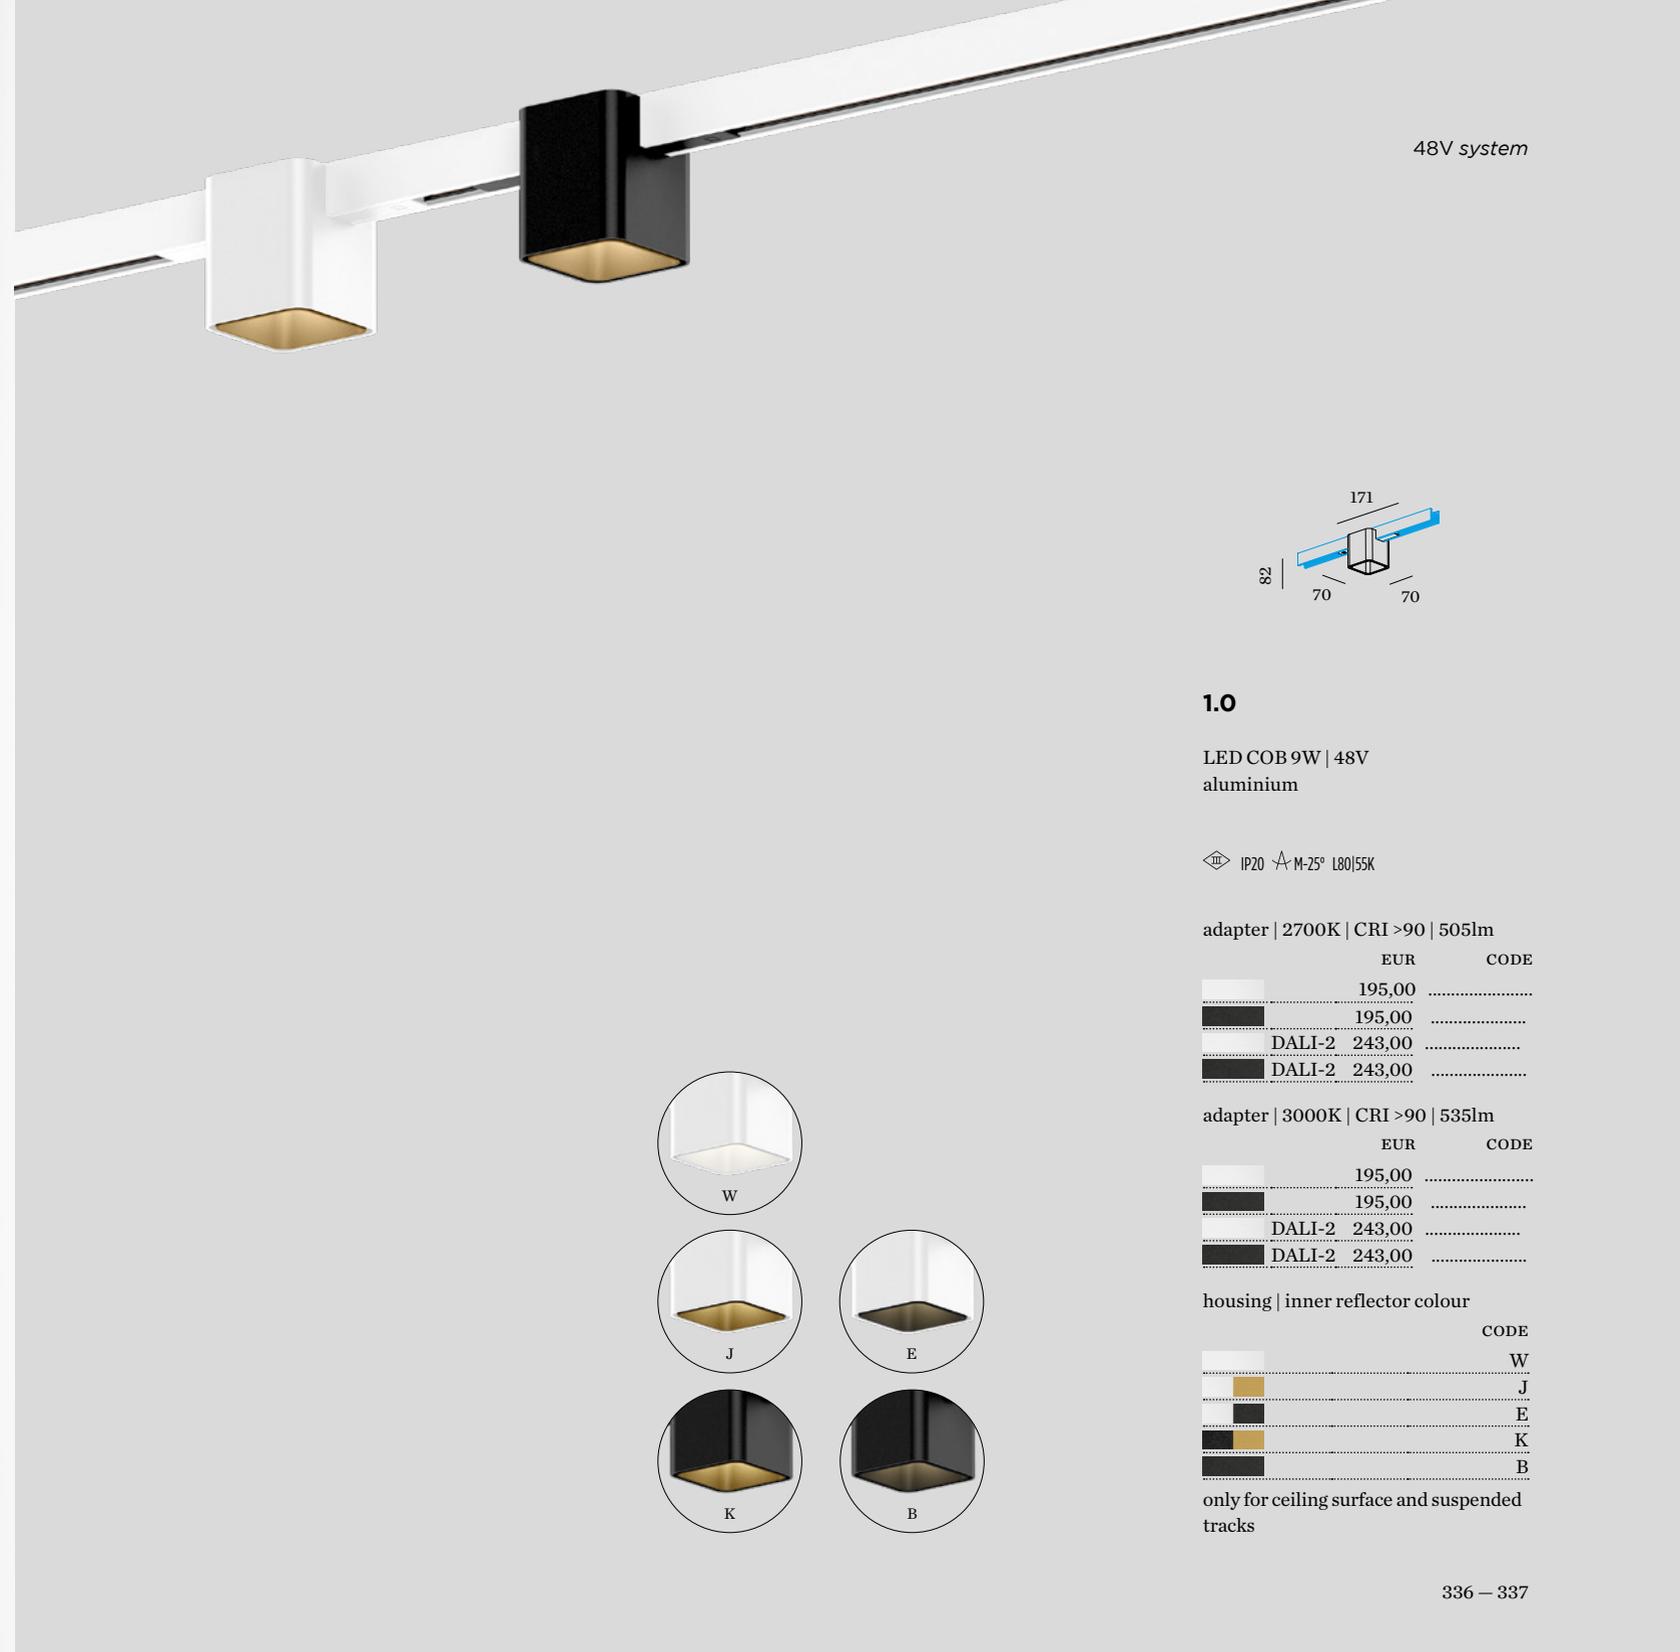

48V system



**1.0**

LED COB 9W | 48V  
aluminium

IP20 M-25° L80/55K

adapter | 2700K | CRI >90 | 505lm

	EUR	CODE
	195,00	.....
	195,00	.....
 DALI-2	243,00	.....
 DALI-2	243,00	.....



adapter | 3000K | CRI >90 | 535lm


	EUR	CODE
	195,00	.....
	195,00	.....
 DALI-2	243,00	.....
 DALI-2	243,00	.....

housing | inner reflector colour


	CODE
	W
	J
	E
	K
	B

only for ceiling surface and suspended tracks



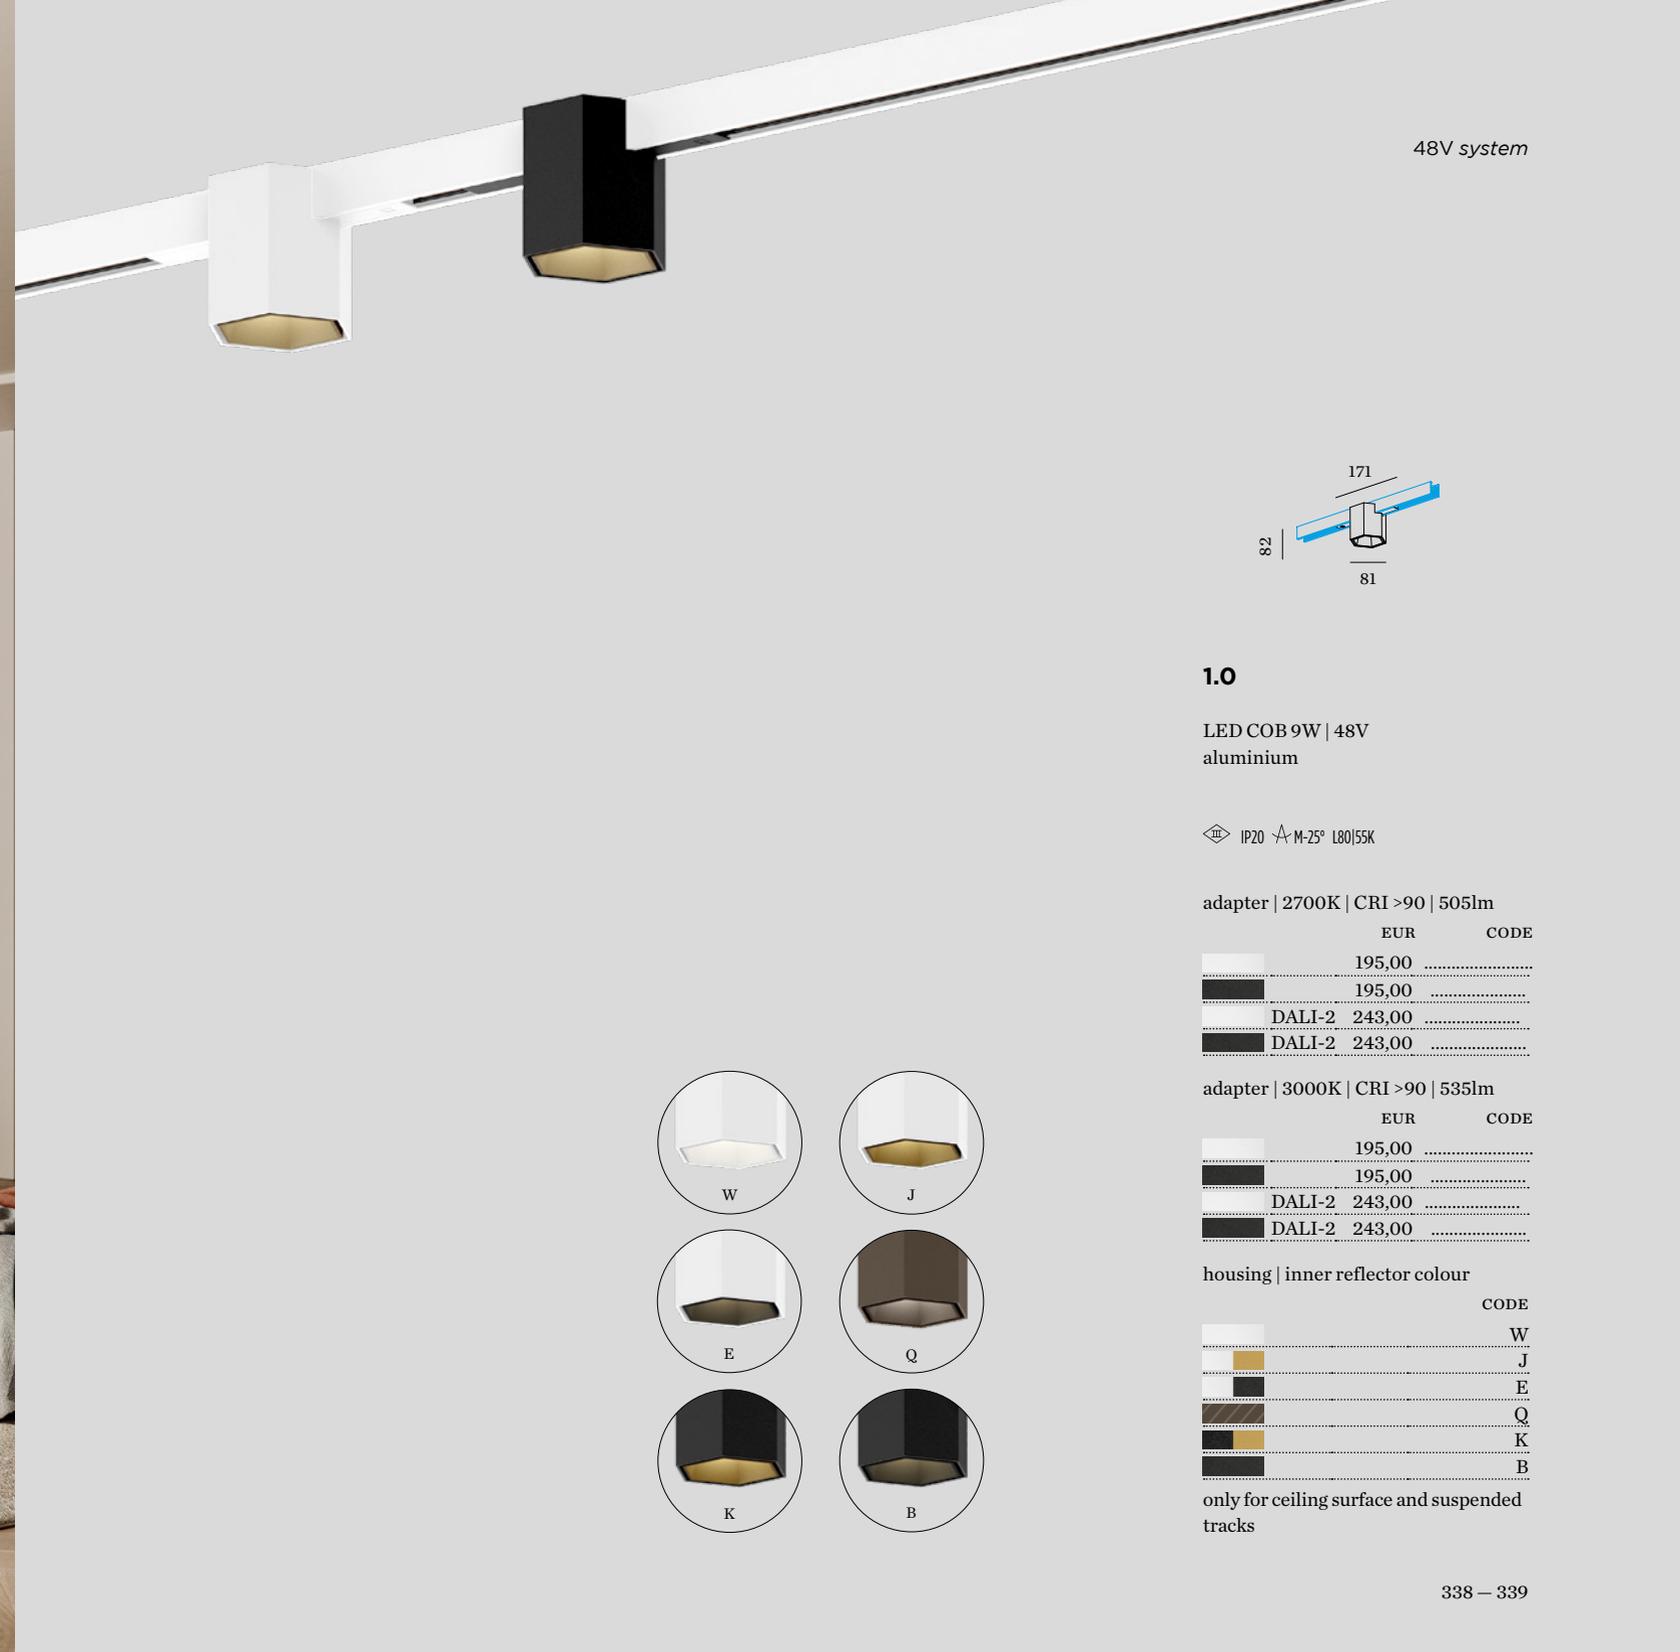

48V system



**1.0**

LED COB 9W | 48V  
aluminium

IP20 M-25° 180/55K

adapter | 2700K | CRI >90 | 505lm

	EUR	CODE
	195,00	
	195,00	
	243,00	DALI-2
	243,00	DALI-2





adapter | 3000K | CRI >90 | 535lm

	EUR	CODE
	195,00	
	195,00	
	243,00	DALI-2
	243,00	DALI-2

housing | inner reflector colour


	CODE
	W
	J
	E
	Q
	K
	B

only for ceiling surface and suspended tracks





48V system



**1.0**

LED COB 9W | 48V  
aluminium

IP20 M-25° L80/55K

adapter | 2700K | CRI >90 | 485lm

	EUR	CODE
	188,00	.....
	188,00	.....
	236,00	.....
	236,00	.....


adapter | 3000K | CRI >90 | 515lm

	EUR	CODE
	188,00	.....
	188,00	.....
	236,00	.....
	236,00	.....

housing | inner reflector colour


	CODE
	W
	WM
	E
	M
	H
	Q
	CH
	B

only for ceiling surface and suspended tracks

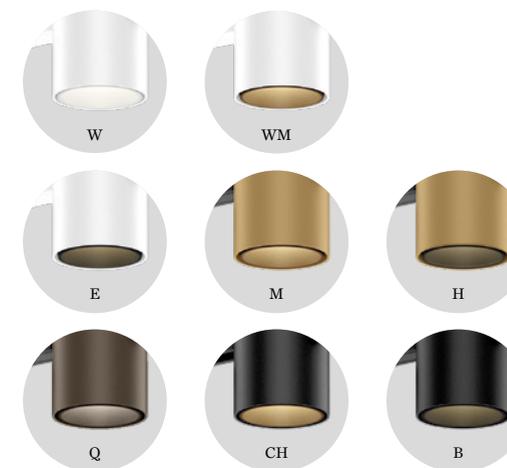



48V system



### 1.0 DOT

LED PCB 9W | 48V  
PC adapter | cover  
PC lens

◆ IP20  $\Delta$ W-40° UGR=19 L80|60K


non dim

	EUR
	278,00
	278,00

DALI

	EUR
	344,00
	344,00


LIGHT COLOUR	LUMEN CRI	CODE
2700K	840 >90	3
3000K	860 >90	5



dot



opal



### 1.0 OPAL

LED PCB 15W | 48V  
PC adapter | cover  
PMMA opal cover

◆ IP20 L80|60K


non dim

	EUR
	188,00
	188,00

DALI

	EUR
	228,00
	228,00

LIGHT COLOUR	LUMEN CRI	CODE
2700K	620 >90	3
3000K	640 >90	5



### 2.0 OPAL

LED PCB 29W | 48V  
PC adapter | cover  
PMMA opal cover

◆ IP20 L80|60K

non dim

	EUR
	269,00
	269,00

DALI

	EUR
	309,00
	309,00

LIGHT COLOUR	LUMEN CRI	CODE
2700K	1240 >90	3
3000K	1280 >90	5



**1.0**

LED PCB 7W | 48V | DALI-2  
aluminium | glass | PC adapter  
black and T- black cable/adapter  
others - white cable/adapter

IP20 M-40° L80|50K

2700K | CRI >90 | 480lm

EUR	
White	277,00
Grey	277,00
Black	277,00
Dark Grey	285,00
Black	277,00

**2.0**

LED PCB 7W | 48V | DALI-2  
aluminium | glass | PC adapter  
black and T - black cable/adapter  
others - white cable/adapter

IP20 M-40° L80|50K

2700K | CRI >90 | 510lm

EUR	
White	282,00
Grey	282,00
Black	282,00
Dark Grey	290,00
Black	282,00

**3.0**

LED PCB 7W | 48V | DALI-2  
aluminium | glass | PC adapter  
black and T - black cable/adapter  
others - white cable/adapter

IP20 M-40° L80|50K



2700K | CRI >90 | 520lm

EUR	
White	287,00
Grey	287,00
Black	287,00
Dark Grey	295,00
Black	287,00

easy cable adjustment



48V system



**3.0**

LED COB 7W | 48V | DALI-2  
aluminium | PC adapter  
white fixtures - white cable/adaptor  
others - black cable/adaptor

IP20 W-54° L80|50K

	EUR
	268,00
	275,00
	275,00
	275,00
	268,00

LIGHT COLOUR	LUMEN CRI	CODE
2700K	490 >90	3
3000K	520 >90	5


**5.0**


LED COB 7W | 48V | DALI-2  
aluminium | PC adapter  
white fixtures - white cable/adaptor  
others - black cable/adaptor

IP20 W-54° L80|50K

	EUR
	281,00
	290,00
	290,00
	290,00
	281,00

LIGHT COLOUR	LUMEN CRI	CODE
2700K	490 >90	3
3000K	520 >90	5




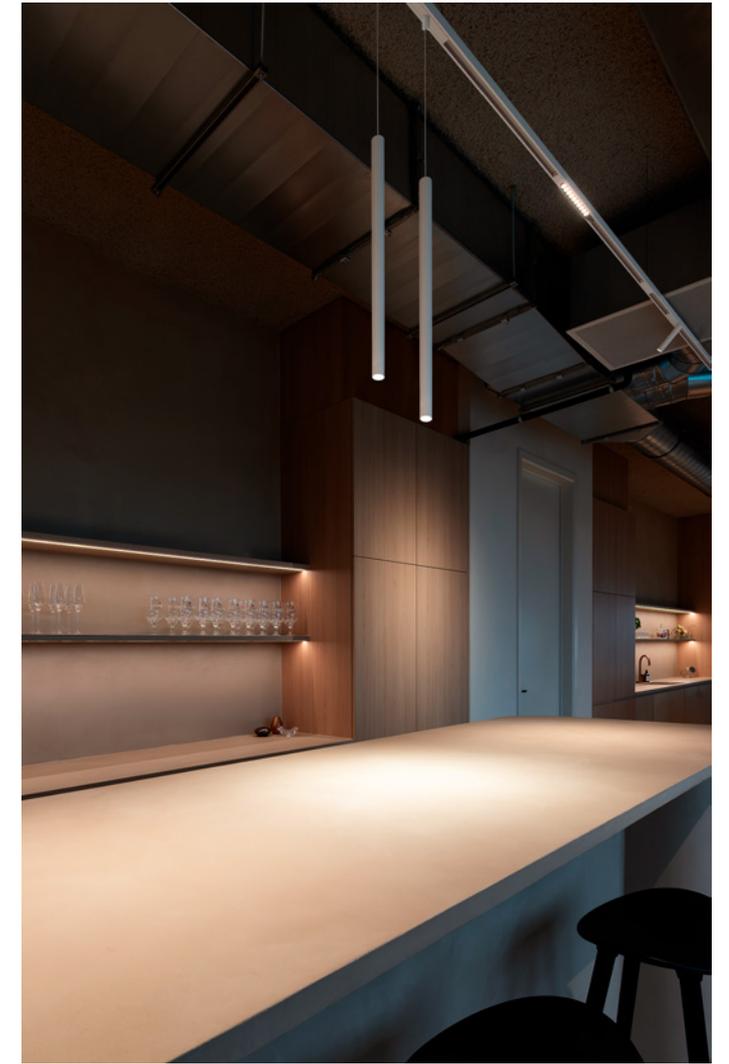






48V system

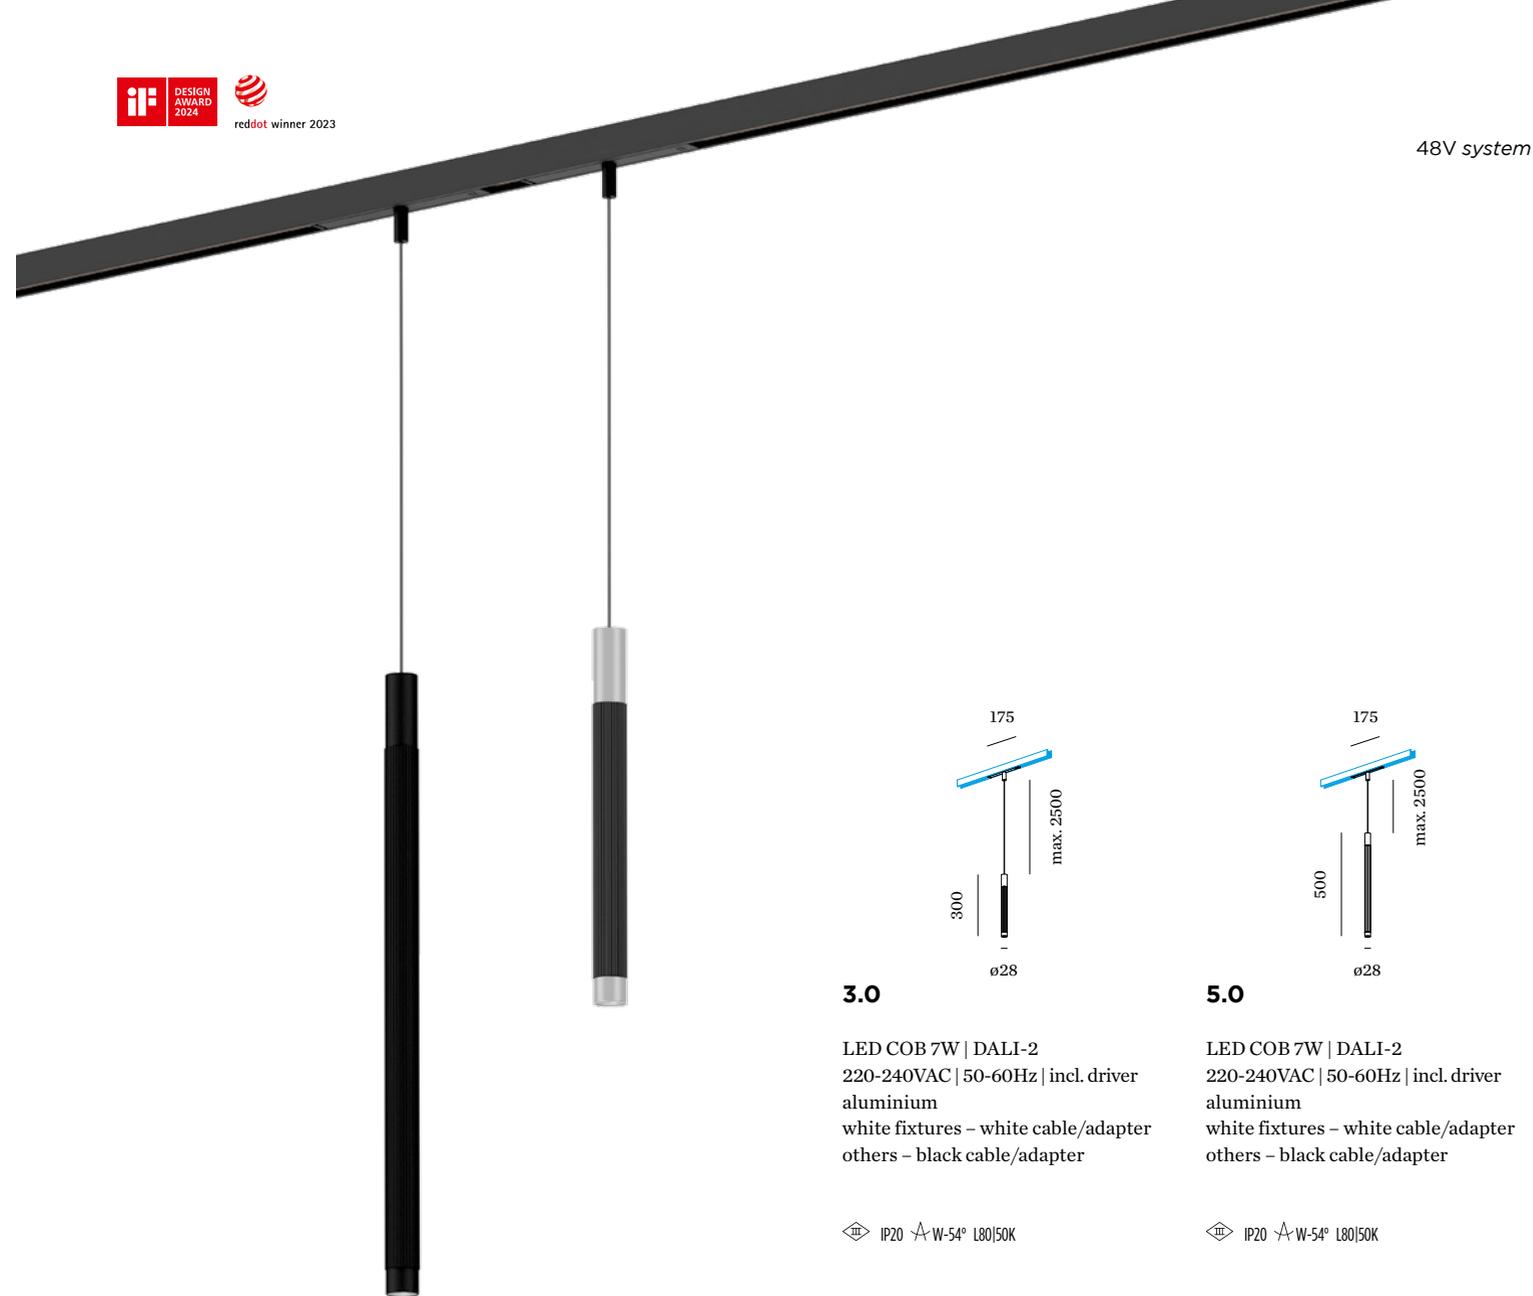

**3.0**

LED COB 7W | DALI-2  
 220-240VAC | 50-60Hz | incl. driver  
 aluminium  
 white fixtures - white cable/adaptor  
 others - black cable/adaptor

 IP20  W-54° L80|50K

	EUR	CODE
	287,00	.....
	294,00	.....
	.....	.....
	287,00	.....

LIGHT COLOUR	LUMEN CRI	CODE
2700K	490 >90	3


**5.0**

LED COB 7W | DALI-2  
 220-240VAC | 50-60Hz | incl. driver  
 aluminium  
 white fixtures - white cable/adaptor  
 others - black cable/adaptor

 IP20  W-54° L80|50K

	EUR	CODE
	296,00	.....
	305,00	.....
	305,00	.....
	296,00	.....

LIGHT COLOUR	LUMEN CRI	CODE
2700K	490 >90	3
		5





48V system

**1.2**

LED COB 7W | 48V | DALI-2  
aluminium | PC adapter  
white fixtures - white cable/adapter  
others - black cable/adapter

IP20 M-32° L70|55K

	EUR	CODE
White	390,00	
Black	390,00	
White/Black	390,00	
White/Gold	390,00	
Black/Gold	390,00	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	400 >90	3
3000K	445 >90	5

**1.4**

LED COB 7W | 48V | DALI-2  
aluminium | PC adapter  
white fixtures - white cable/adapter  
others - black cable/adapter

IP20 M-32° L70|55K

	EUR	CODE
White	332,00	
Black	332,00	
White/Black	332,00	
White/Gold	332,00	
Black/Gold	332,00	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	450 >90	3
3000K	470 >90	5

**1.6**


LED COB 7W | 48V | DALI-2  
aluminium | PC adapter  
white fixtures - white cable/adapter  
others - black cable/adapter

IP20 M-32° L70|55K

	EUR	CODE
White	336,00	
Black	336,00	
White/Black	336,00	
White/Gold	336,00	
Black/Gold	336,00	


LIGHT COLOUR	LUMEN CRI	CODE
2700K	480 >90	3
3000K	505 >90	5

optional inner cover on page 910

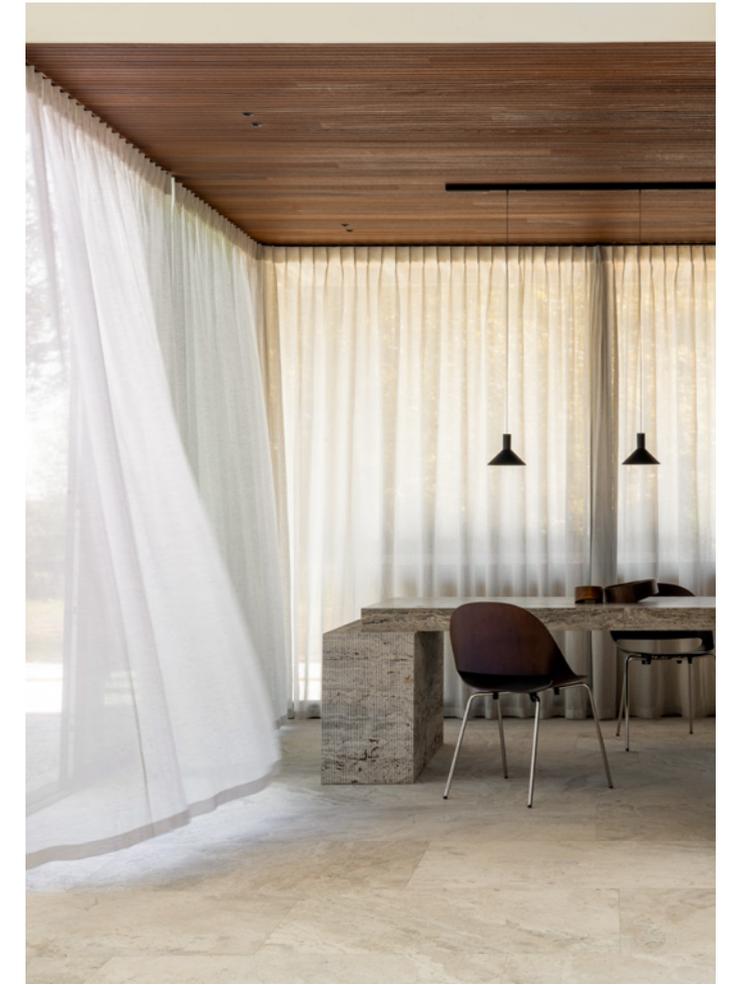



48V system




**1.0**

LED PCB 5W | 48V | DALI-2  
 aluminium | glass | PC adapter  
 white fixtures – white cable/adapter  
 others – black cable/adapter

IP20 L80/100K


2700K | CRI >90 | 245lm

	EUR
	294,00
	294,00
	294,00





48V system




**1.0**

LED COB 7W | 48V | DALI-2  
 aluminium | black cable  
 artisanal Italian hand blown glass  
 PC adapter

IP20 L80|50K


	EUR	CODE
	382,00	.....
	382,00	.....
	344,00	.....

LIGHT COLOUR	LUMEN CRI	CODE
2700K	280 >90	3
3000K	290 >90	5



**DRIVER 48V/100W** 100W |


48V  
220-240VAC | 50-60Hz  
L/W/H 350x30x18  
IP20 CE



EUR  
89,00

**DRIVER 48V/150W** 150W |


48V  
220-240VAC | 50-60Hz  
L/W/H 350x30x18  
IP20 CE



EUR  
108,00


**DRIVER 48V/250W** 250W |

48V  
220-240VAC | 50-60Hz  
L/W/H 400x40x22  
IP20 CE



EUR  
135,00


**DALI SELV DEVICE** for 48V system | max. 300W | 48VDC L/W/H 212x37x26



EUR  
158,00

**RECESSED**

track | custom cuts | 48V | 15A | DALI



EUR CODE

	< 1m	129,00	.....
	< 1m	129,00	.....


	< 2m	249,00	.....
	< 2m	249,00	.....

	< 3m	363,00	.....
	< 3m	363,00	.....

CC = for lengths specifications please add four digits in mm

**SURFACE**

track | custom cuts | 48V | 15A | DALI



EUR CODE

	< 1m	103,00	.....
	< 1m	103,00	.....

	< 2m	188,00	.....
	< 2m	222,00	.....
	< 2m	222,00	.....

	< 2m	222,00	.....
	< 2m	222,00	.....


	< 3m	272,00	.....
	< 3m	323,00	.....
	< 3m	323,00	.....

	< 3m	323,00	.....
	< 3m	323,00	.....

CC = for lengths specifications please add four digits in mm

**SUSPENDED**

track | custom cuts | 48V | 15A | DALI



EUR CODE

	< 1m	103,00	.....
	< 1m	103,00	.....

	< 2m	188,00	.....
	< 2m	222,00	.....
	< 2m	222,00	.....

	< 2m	222,00	.....
	< 2m	222,00	.....


	< 3m	272,00	.....
	< 3m	323,00	.....
	< 3m	323,00	.....

	< 3m	323,00	.....
	< 3m	323,00	.....

CC = for lengths specifications please add four digits in mm

**SUSP. INDIRECT LIGHT**

track | custom cuts | 48V | 15A | DALI 3000K | CRI >90 | 14W/m | 950lm/m with indirect light



EUR CODE

	< 2m	595,00	.....
	< 2m	595,00	.....

	< 3m	695,00	.....
	< 3m	695,00	.....

CC = for lengths specifications please add four digits in mm