

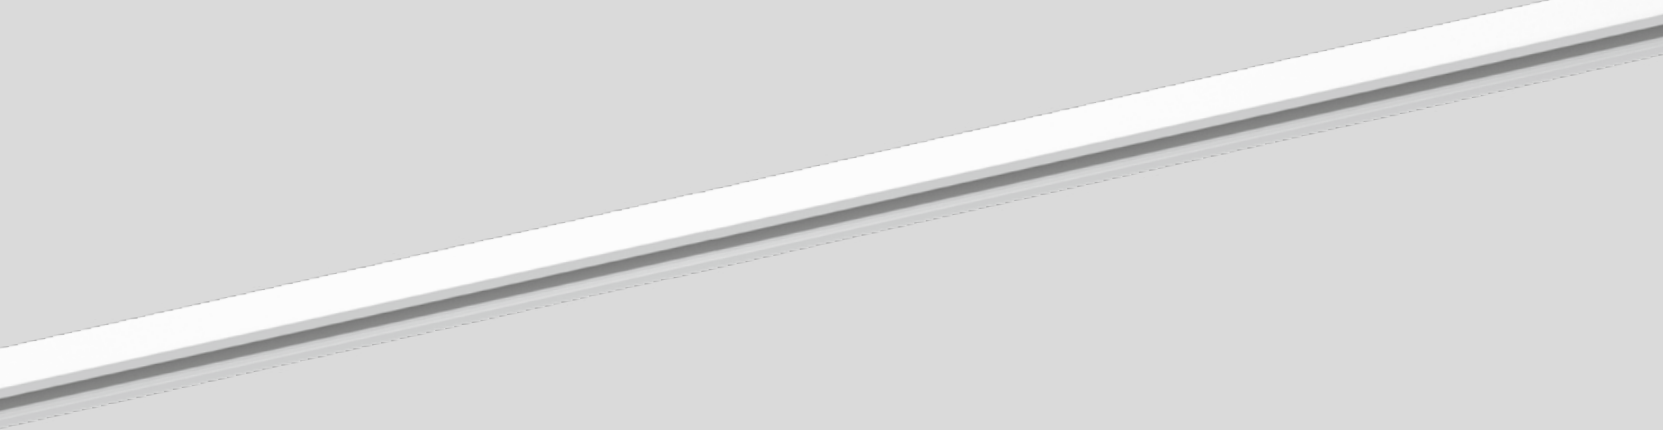




1-PHASE TRACKS

220-240V *tracks / accessories*

RECESSED | SURFACE | SUSPENDED EXAMPLES

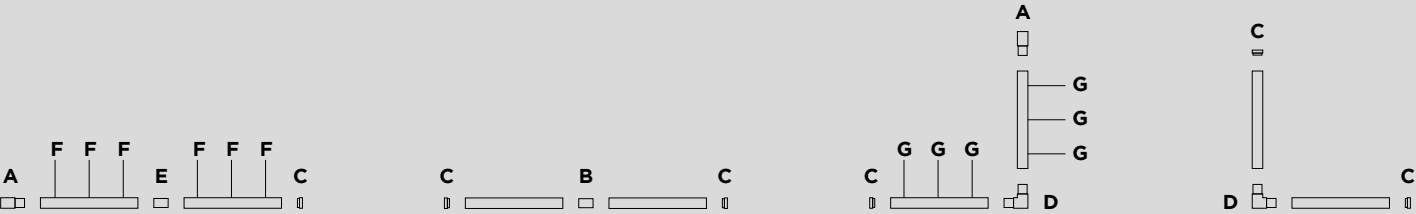


TRACK PROFILE

recessed | 220-240V | 16A



	EUR
 1m	60,30
 1m	60,30
 2m	113,40
 2m	113,40
 3m	149,80
 3m	149,80




F | MOUNTING BRACKET

for recessed fixation



	EUR
	11,40
for 1.0m - 2pcs needed	
for 2.0m - 3pcs needed	
for 3.0m - 4pcs needed	



TRACK PROFILE

surface | suspended | 220-240V | 16A



	EUR
 1m	42,60
 1m	42,60
 2m	85,30
 2m	85,30
 3m	133,10
 3m	133,10


ø29



G | SUSPENSION SET

complete suspension set
incl. ceiling fixation bracket


	EUR
 max. 1.5m	27,90
 max. 1.5m	27,90
 max. 3m	32,80
 max. 3m	32,80
for 1.0m - 2pcs needed	
for 2.0m - 3pcs needed	
for 3.0m - 4pcs needed	



A | END FEED 1.0

220-240V | max. 3 x 1.5mm² - 16A


	EUR
 14,80	14,80
 14,80	14,80



A | END FEED 2.0

220-240V | max. 3 x 1.5mm² - 16A


	EUR
 14,80	14,80
 14,80	14,80



B | MIDDLE FEED


straight
220-240V | max. 3 x 1.5mm² - 16A

	EUR
 36,20	36,20
 36,20	36,20



C | END CAP LEFT/RIGHT


	EUR
 3,50	3,50
 3,50	3,50



D | L-FEED 1.0

220-240V | max. 3 x 1.5mm² - 16A

	EUR
 38,00	38,00
 38,00	38,00



D | L-FEED 2.0

220-240V | max. 3 x 1.5mm² - 16A

	EUR
 38,00	38,00
 38,00	38,00



E | STRAIGHT CONNECTOR

straight | 220-240V | 16A

	EUR
 13,00	13,00
 13,00	13,00



COVERPLATE END FEED

only use with recessed tracks



	EUR
 9,60	9,60
 9,60	9,60
more 1-phase track accessories on page 822	



ARA
1-Phase



241



1.0 LED

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter

IP20 0-90°|355° 34° SDCM3 L70|55K 0.24kg

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter

IP20 0-90°|355° 0.16kg

	EUR
	161,20
	168,00
	169,00
	161,20

LIGHT COLOUR	LUMEN CRI	CODE
2700K	655 >80	3
3000K	700 >80	5

	EUR
	91,50
	98,30
	99,30
	91,50

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	EUR
2700K 460lm	20,50
2700K 437lm	20,50
3000K 500lm	20,50
3000K 457lm	20,50



black ring
LED



W



G



PAR16



K



B



SUBE

1-Phase

75
77
ø55

75
77
ø55

1.0 LED

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter

IP20 0-90°|355° 39° SDCM3 L70|55K 0.36kg

	EUR	
	175,80	
	175,80	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	415 >90	3
3000K	430 >90	5
1800-3000K	350 >90	9

black ring
LED

PAR16

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter


IP20 0-90°|355° 0.32kg

	EUR	
	109,20	
	109,20	

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	EUR	
2700K 460lm	20,50	
2700K 437lm	20,50	
3000K 500lm	20,50	
3000K 457lm	20,50	



white fixtures with white adapter
other fixtures with black adapter



IRO

1-Phase



93



205



2.0 SPOT

 LED COB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PC lens and reflector
1-phase Global® track adapter

⊕ IP20 310° $\angle$ 32° SDCM2 L70|55K 0.36kg

EUR		
	194,50	
	194,50	
	194,50	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x360 >90	3
3000K	2x380 >90	5

4.0 SPOT

 LED COB 20W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PC lens and reflector
1-phase Global® track adapter

⊕ IP20 310° $\angle$ 32° SDCM2 L70|55K 0.58kg

EUR		
	254,80	
	254,80	
	254,80	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	4x360 >90	3
3000K	4x380 >90	5

2.0 OPAL

 LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PMMA cover
1-phase Global® track adapter

⊕ IP20 310° SDCM3 L80|60K 0.33kg

EUR		
	194,50	
	194,50	
	194,50	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	270 >90	3
3000K	290 >90	5


4.0 OPAL

 LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PMMA cover
1-phase Global® track adapter

⊕ IP20 310° SDCM3 L80|60K 0.54kg



EUR		
	254,80	
	254,80	
	254,80	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	710 >90	3
3000K	740 >90	5

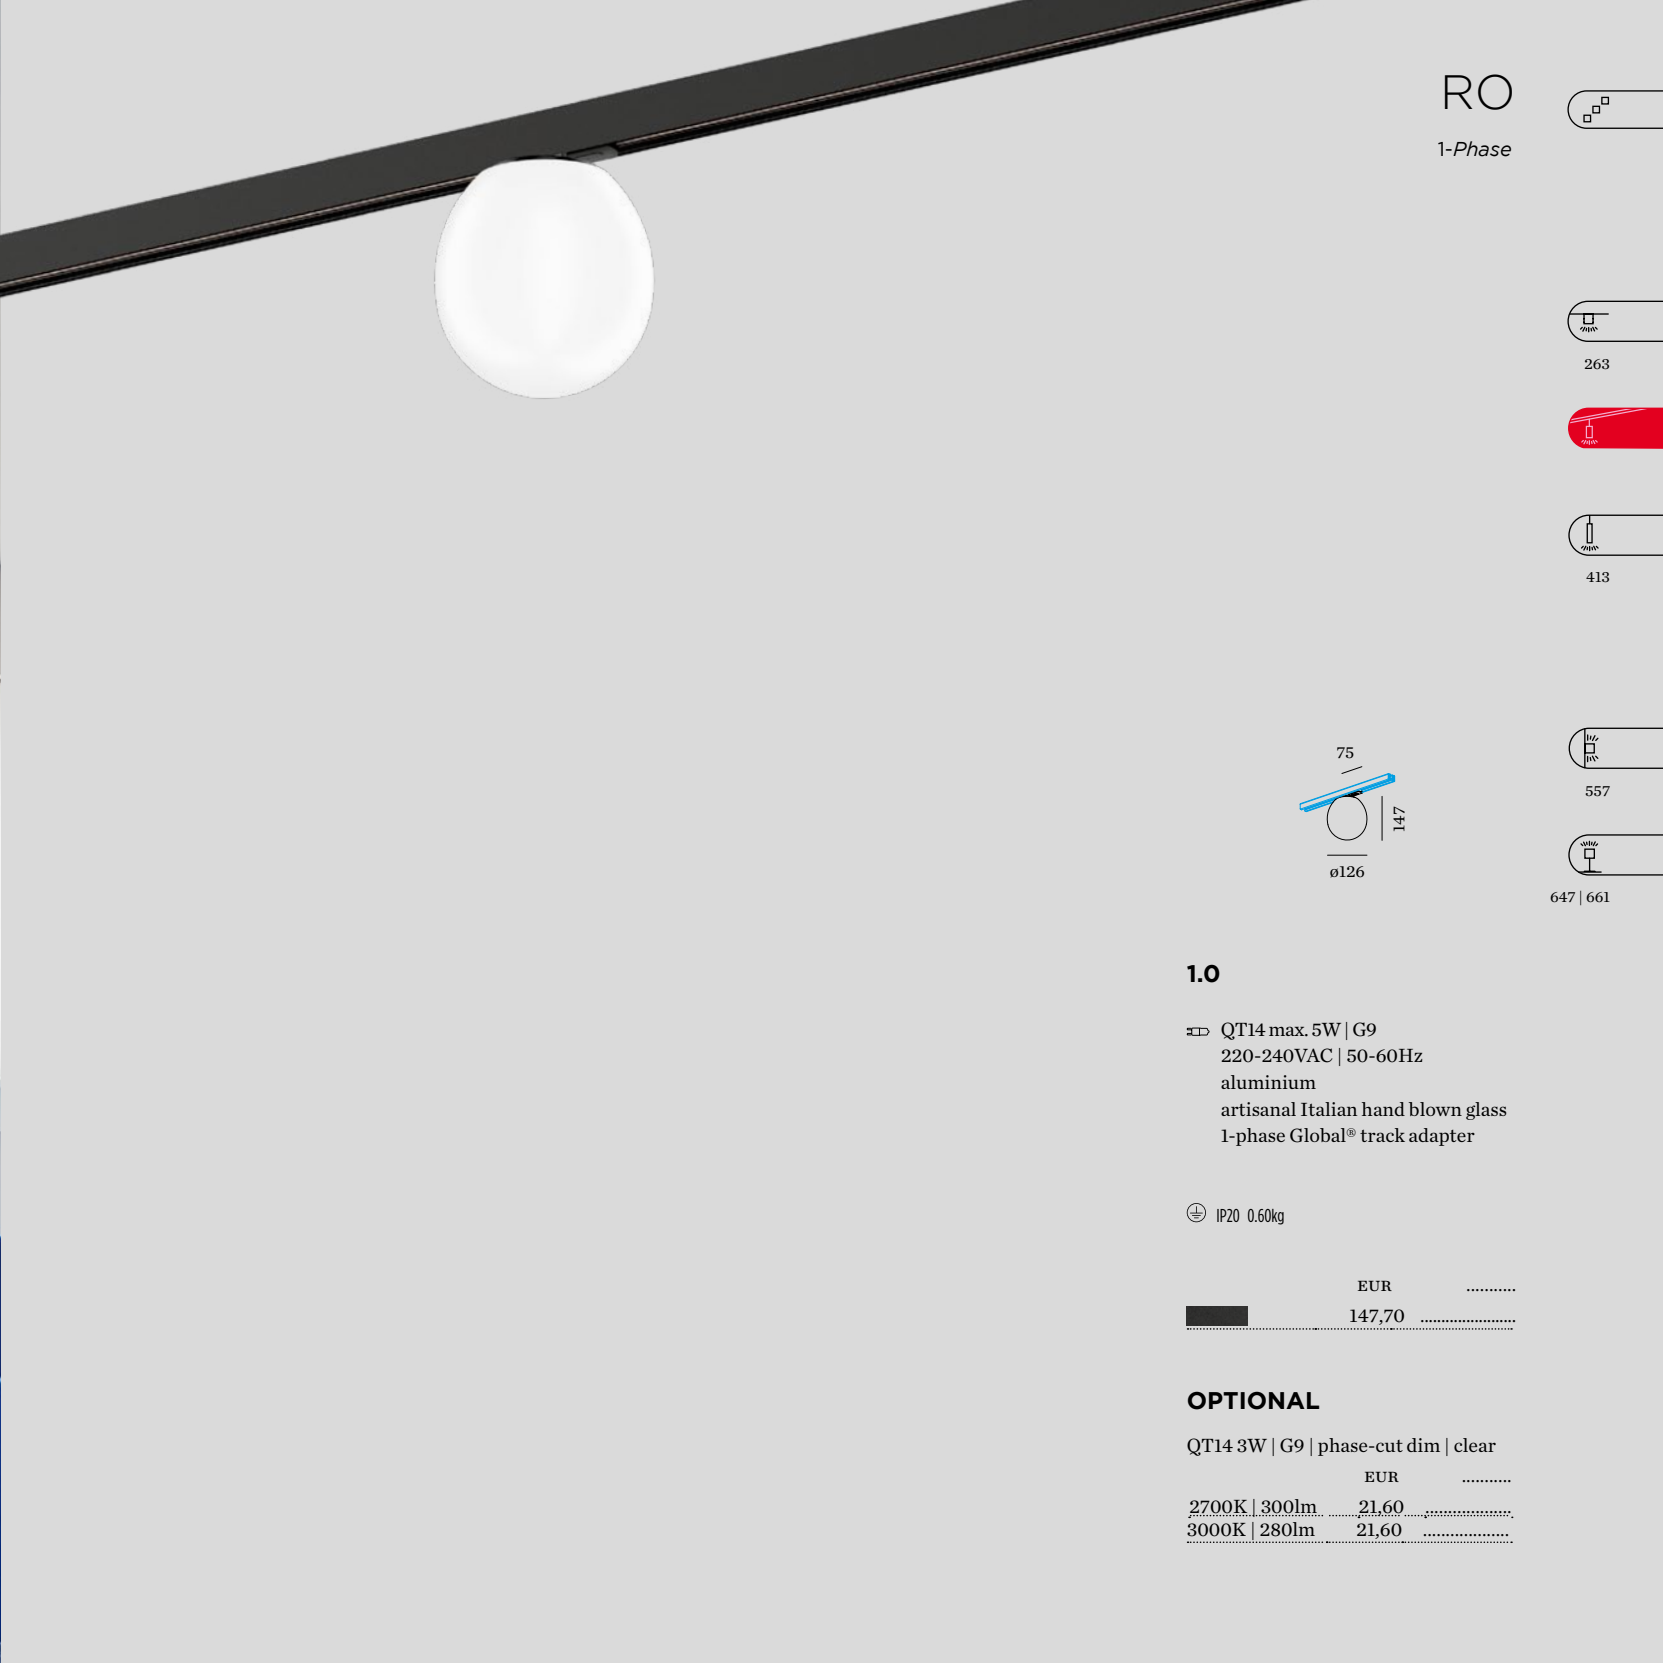

RO

1-Phase




263




413



557



647 | 661



1.0

QT14 max. 5W | G9
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass
1-phase Global® track adapter

IP20 0.60kg

EUR	
147,70	

OPTIONAL

QT14 3W | G9 | phase-cut dim | clear


EUR	
2700K 300lm	21,60
3000K 280lm	21,60



white fixture with white cable/adaptor
other fixtures with black cable/adaptor
more colour combinations on request

AY | EXO

1-Phase



EXO 2.0 | 3.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter

IP20 0.58 | 0.74kg


2.0	EUR
200mm	
	114,70
	114,70
	114,70
	111,70

3.0	EUR
300mm	
	121,30
	121,30
	121,30
	119,00

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim
EUR

	2700K 460lm	20,50
	2700K 437lm	20,50
	3000K 500lm	20,50
	3000K 457lm	20,50



AY 2.0 | 3.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter

IP20 0.54 | 0.68kg


2.0	EUR
200mm	
	101,40
	108,70
	108,70
	108,70
	101,40

3.0	EUR
300mm	
	107,60
	114,70
	114,70
	107,60


OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim
EUR


	2700K 460lm	20,50
	2700K 437lm	20,50
	3000K 500lm	20,50
	3000K 457lm	20,50




181 | 189




469 | 471



545



689




721



DREY

1-Phase



1.1
PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
incl. 1-phase Global® track adapter

IP20 0.29kg

	EUR	
	153,90	
	153,90	
	153,90	
	153,90	
	153,90	
	153,90	

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	EUR	
2700K 460lm	20,50	
2700K 437lm		
3000K 500lm	20,50	
3000K 457lm	20,50	



WW



GG



BB




WG



BG

white fixture with white cable/adaptor
other fixtures with black cable/adaptor
more colour combinations on request



1.2
PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium | shade matching
inner cover included
incl. 1-phase Global® track adapter


IP20 0.49kg

	EUR	
	218,40	
	218,40	
	218,40	
	218,40	
	218,40	
	218,40	

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	EUR	
2700K 460lm	20,50	
2700K 437lm	20,50	
3000K 500lm	20,50	
3000K 457lm	20,50	



1.3
PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
incl. 1-phase Global® track adapter


IP20 0.28kg

	EUR	
	151,30	
	151,30	
	151,30	
	151,30	
	151,30	
	151,30	


OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	EUR	COD
2700K 460lm	20,50	
2700K 437lm	20,50	
3000K 500lm	20,50	
3000K 457lm	20,50	



461



525



DREY


1-Phase



461




525




1.4

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
incl. 1-phase Global® track adapter



1.6

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
incl. 1-phase Global® track adapter



1.7

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
incl. 1-phase Global® track adapter



WW



GG



BB



WG



BG



GB

white fixture with white cable/adapter
other fixtures with black cable/adapter
more colour combinations on request

⊕ IP20 0.33kg

	EUR	CODE
	162,20	
	162,20	
	162,20	
	162,20	
	162,20	

OPTIONAL

	EUR
2700K 460lm	20,50
2700K 437lm	20,50
3000K 500lm	20,50
3000K 457lm	20,50

⊕ IP20 0.36kg

	EUR	
	163,30	
	163,30	
	163,30	
	163,30	
	163,30	

optional inner cover on page 755

OPTIONAL

	EUR
2700K 460lm	20,50
2700K 437lm	20,50
3000K 500lm	20,50
3000K 457lm	20,50

⊕ IP20 0.32kg

	EUR	
	164,30	
	164,30	
	164,30	
	164,30	
	164,30	

optional inner cover on page 755

OPTIONAL

	EUR
2700K 460lm	20,50
2700K 437lm	20,50
3000K 500lm	20,50
3000K 457lm	20,50

1-PHASE TRACK

Accessories

TRACK ADAPTER 1.0


no space for driver
for suspended luminaires without
steel wire | incl. strain relief
max. weight 10kg



	EUR
	13,30
	13,30


TRACK ADAPTER 2.0

no space for driver
for suspended luminaires without
steel wire | incl. strain relief
max. weight 3kg



	EUR
	15,10
	15,10


ADJUSTABLE CORNER



	EUR
	38,00
	38,00

COVERPLATE I/L/T/X

only use with recessed tracks



	EUR
	7,50
	7,50


COVERPLATE END FEEDS

only use with recessed tracks



	EUR
	9,60
	9,60


X-FEED



	EUR
	53,00
	53,00

T-FEED 1.0


top view



	EUR
	44,20
	44,20

T-FEED 2.0


top view



	EUR
	44,20
	44,20

T-FEED 3.0


top view



	EUR
	44,20
	44,20

T-FEED 4.0

top view



	EUR
	44,20
	44,20