


Choose your *mounting*

Discrètement dissimulé dans le plafond, sous forme de la variante de montage marquante ou finalement plutôt suspendu librement dans la pièce ? Avec nos trois options de montage différentes, vous trouverez la solution adaptée à chaque espace. Notre conseil : faites simplement un petit croquis de votre projet et notez brièvement où vous souhaitez monter le rail et quelles zones vous souhaitez mettre en valeur. Cela permet d’avoir immédiatement une meilleure vue d’ensemble.


Custom cut available





Ceiling *recessed*



Ceiling *surface*



Ceiling *suspended*



M | MOUNTING BRACKET

recessed mounting bracket
for 1m - 2pcs needed | for 2m - 4pcs
needed | for 3m - 6pcs needed

RECESSED track




48V | 15A | DALI

SELV 31-33 1.65 5-25

	EUR
1m	114,40
1m	114,40
2m	233,00
2m	233,00
3m	347,40
3m	347,40

E | END CAP

	EUR
	12,00
	12,00



SURFACE track


48V | 15A | DALI

SELV

	EUR
1m	88,40
1m	88,40
2m	171,60
2m	205,90
2m	205,90
2m	171,60
3m	254,80
3m	305,80
3m	305,80
3m	254,80

E | END CAP

	EUR
	7,30
	7,60
	7,60
	7,30



SUSPENDED track

48V | 15A | DALI

SELV

	EUR
1m	88,40
1m	88,40
2m	171,60
2m	205,90
2m	205,90
2m	171,60
3m	254,80
3m	305,80
3m	305,80
3m	254,80


SUSP. INDIRECT

track 48V | 15A | DALI | with indirect
light | 3.0m suspension sets already
included | 15W/m

SELV

	EUR
2m	572,00
2m	572,00

	EUR
3m	670,80
3m	670,80




S | SUSPENSION SET

complete suspension set | incl. ceiling
fixation bracket | not needed for
indirect light version | for 1m - 2pcs
needed | for 2m - 3pcs needed
for 3m - 4pcs needed

	EUR
max. 1.5m	28,10
max. 3m	30,70

	EUR
max. 1.5m	28,10
max. 3m	30,70




E | END CAP


	EUR
	7,30
	7,60
	7,60
	7,30




Install it in your *layout*

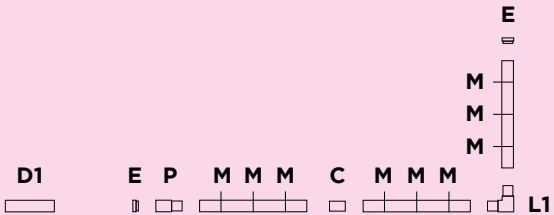

M | S | E
Choose your mounting
on page 295

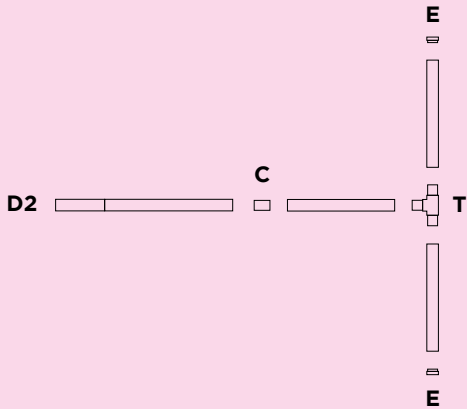

D | P
Choose your driver | power feed
on page 299

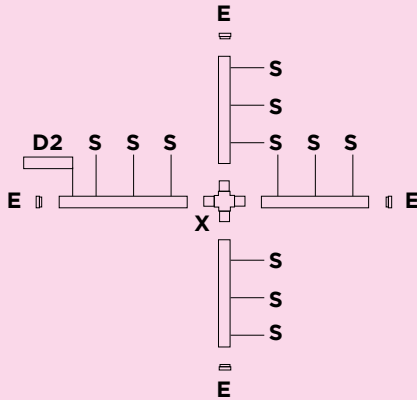


48V system

Good to know


Electrical components of champagne or bronze connectors and drivers will be black.

All mountings



BLANK COVER

	EUR
2m	51,00
2m	51,00




C | CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector

	EUR
	40,00
	40,00


Ceiling recessed



L1 | L-CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector left and right

	EUR
	181,00
	181,00




L2 | L-CONNECTOR NON ELECTRICAL

only needed 1x for square installation

	EUR
	181,00
	181,00


Ceiling surface / suspended



L1 | L-CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector left and right


	EUR
	117,50
	119,60
	119,60
	117,50



L2 | L-CONNECTOR NON ELECTRICAL

only needed 1x for square installation


	EUR
	117,50
	119,60
	119,60
	117,50



T | T-CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector

	EUR
	196,60
	196,60



X | X-CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector

	EUR
	223,60
	223,60


Choose your *driver*

Un système de pilotage permet de réguler le flux de courant qui traverse vos luminaires LED et évite ainsi la surchauffe et le scintillement gênant. Le choix de celui qui convient le mieux à votre système 48V dépend du montage choisi. La solution la plus élégante serait d’avoir un système de pilotage in-track, mais de nombreuses autres variantes sont également possibles.

Good to *know*


Electrical components of champagne or bronze connectors and drivers will be black.

Ceiling *recessed* / *surface*




D1 | REMOTE DRIVER

remote converter | 220-240VAC
50-60Hz | 48V | for connection to
power feed adapter



	EUR
100W 48V	89,40
150W 48V	108,20


for DALI SELV solution see page 821



P | POWER FEED


48V | 15A | DALI | end/middle power
feed adapter | max. 4 x 1.5mm²

	EUR
	37,40
	37,40




D2 | IN LINE DRIVER SURFACE

220-240VAC | 50-60Hz | 48V
incl. power end feed adapter
incl. DALI through wiring




	EUR
100W	276,60
100W	276,60
150W	287,00
150W	287,00




D3 | IN TRACK DRIVER SURFACE


220-240VAC | 50-60Hz | 48V
incl. power end feed function
with in line connection box



	EUR
100W	238,20
100W	241,30
100W	241,30
100W	238,20




	EUR
250W	278,70
250W	279,80
250W	279,80
250W	278,70




D4 | IN TRACK DRIVER SURFACE

220-240VAC | 50-60Hz | 48V
incl. power middle/end feed function
with in track connection




	EUR
100W	231,90
100W	231,90




	EUR
250W	271,40
250W	271,40

Ceiling *suspended*




D1 | CEILING DRIVER

220-240VAC | 50-60Hz | 48V
incl. power middle/end feed adapter
incl. DALI through wiring
driver ceiling mounted




	EUR
100W	305,80
100W	305,80
150W	320,30
150W	320,30




D2 | IN LINE DRIVER

220-240VAC | 50-60Hz | 48V
incl. power end feed adapter
incl. DALI through wiring
suspended driver in line with profile




	EUR
100W	337,00
100W	337,00
150W	348,40
150W	348,40




D3 | IN TRACK DRIVER

220-240VAC | 50-60Hz | 48V
incl. power end feed function
incl. 3m power cable
suspended driver in the profile



	EUR
100W	269,40
100W	269,40




	EUR
250W	309,90
250W	309,90

HOW TO CONTROL MY 48V SYSTEM

What about *control and dim*

All mountings



WIRELESS CASAMBI CONTROL

8W | adapter for wireless control of 64 DALI fixtures in max. 8 groups


	EUR
	509,60
	509,60

Ce qui est génial avec le système 48V ? Il offre une in-finité de possibilités. Vous souhaitez uniquement allumer et éteindre vos luminaires ou varier l'intensité de la luminosité ? Avec le luminaires DALI, c'est très facile. Mais si vous ne souhaitez pas installer un système câblé fixe, vous pouvez également opter pour une variante plus flexible. Ce qu'il faut ? Un module de contrôle Casambi et des inserts DALI adaptés.



Via Casambi *app*

To discover all features and functionalities of the app, visit the casambi website: casambi.com or download the app directly.

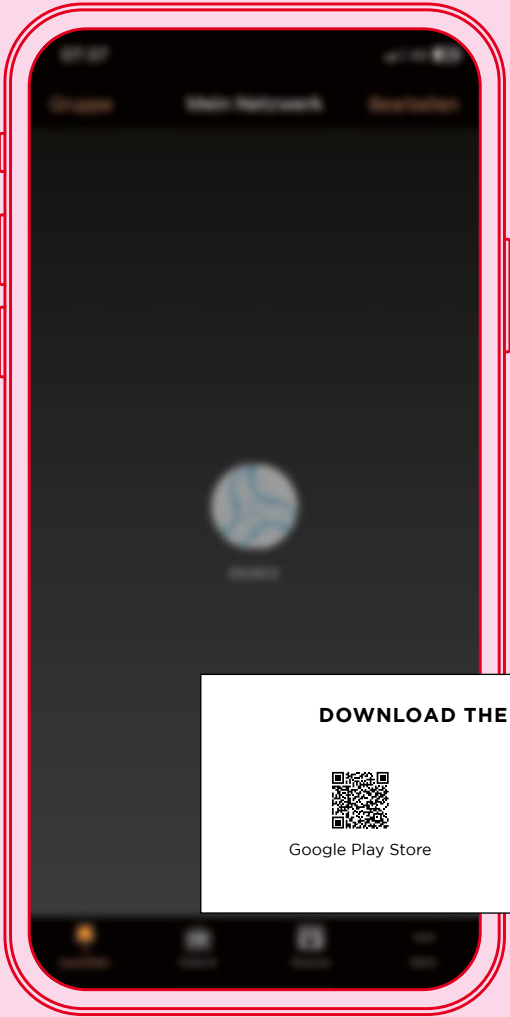

DOWNLOAD THE CASAMBI APP


Google Play Store


App Store

Create a *scene* for your individual lighting solution.



ENO

48V system





119



227



513



1.0

LED COB 7W | 48V
aluminium | PC adapter

IP20 0-90°|355° 31° SDCM2 L70|55K 0.1kg

non dim

	EUR
	168,50
	168,50
	168,50
	168,50
	168,50

DALI-2

	EUR
	254,80
	254,80
	254,80
	254,80
	254,80

LIGHT COLOUR	LUMEN CRI	CODE
2700K	470 >90	3
3000K	500 >90	5

accessories on page 821

2.0

LED COB 13W | 48V
aluminium | PC adapter

IP20 0-90°|355° 31° SDCM2 L70|55K 0.19kg

non dim

	EUR
	257,90
	257,90
	257,90
	257,90
	257,90

DALI-2

	EUR
	334,90
	334,90
	334,90
	334,90
	334,90

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x470 >90	3
3000K	2x500 >90	5

accessories on page 821



honeycomb

OPTIONAL

honeycomb louver

	EUR
	15,40

back





ATCH

48V system




reddot winner 2023



DESIGN AWARD 2023



As awarded by The Chicago Athenaeum:
Museum of Architecture and Design



1.0

LED

LED COB 7W | 48V
aluminium | PC adapter

 IP20

0-90°

360°

 30°

SDCM2

L80|S0K

0.14kg

non dim

	EUR
	175,80
	182,00
	177,80
	175,80

DALI-2

	EUR
	262,10
	268,30
	264,20
	262,10

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	535	>90	3
3000K	560	>90	5

accessories on page 821



back





57

|

113

|

145



223





407



515

|

623



659



ICK

48V system

237

625

115 | 171

130

26

171

26

130

1.0

LED

 LED COB10W | 48V
aluminium | PC adapter

IP20

 0-90°|360°

23°

 SDCM2 L80|50K 0.22kg

non dim

	EUR
	191,40
	191,40

DALI-2

	EUR
	285,00
	285,00

LIGHT COLOUR	LUMEN CRI	CODE
2700K	425 >90	3
3000K	465 >90	5

accessories on page 821

2.0

LED

 LED COB19W | 48V
aluminium | PC adapter

IP20

 0-90°|360°

23°

 SDCM2 L80|50K 0.44kg

non dim

	EUR
	282,90
	282,90

DALI-2

	EUR
	389,00
	389,00

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x425 >90	3
3000K	2x465 >90	5


accessories on page 821

back





48V system



1.0

LED

LED COB 7W | 48V

aluminium

 IP20

 25°

 SDCM2

 L80/55K

 0.20kg

adapter | 2700K | CRI >90 | 440lm

EUR

191,40

.....



191,40

.....



DALI-2

236,10

.....



DALI-2

236,10

.....

adapter | 3000K | CRI >90 | 470lm

EUR

191,40

.....



191,40

.....



DALI-2

236,10

.....



DALI-2

236,10

.....

housing | inner reflector colour



W



WM



E



M



H



Q



BQ



CH



B


only for ceiling surface and suspended tracks



W




WM



E



M



H




Q



BQ



CH



B

back



OCUS

48V system

82

70

171

70

1.0

LED LED COB 7W | 48V
aluminium

IP20 25° SDCM2 L80/LS5K 0.18kg

adapter | 2700K | CRI >90 | 440lm

	EUR	
	197,90	
	197,90	
DALI-2	242,60	
DALI-2	242,60	

adapter | 3000K | CRI >90 | 470lm

	EUR	
	197,90	
	197,90	
DALI-2	242,60	
DALI-2	242,60	

housing | inner reflector colour

	CODE
	W
	J
	E
	BQ
	K
	B

only for ceiling surface and suspended tracks

back



EXO

48V system

82

171

81

1.0

LED

 LED COB 7W | 48V
aluminium

IP20

 $\angle 25^\circ$ SDCM2 L80/55K 0.18kg

adapter | 2700K | CRI >90 | 440lm

	EUR	
	197,90	
	197,90	
DALI-2	242,60	
DALI-2	242,60	

adapter | 3000K | CRI >90 | 470lm

	EUR	
	197,90	
	197,90	
DALI-2	242,60	
DALI-2	242,60	

housing | inner reflector colour

	CODE
	W
	J
	E
	Q
	BQ
	K
	B

only for ceiling surface and suspended tracks

W

J

E

Q

BQ

K

B

back



AY

48V system

82

171

ø70

1.0

LED

LED COB 7W | 48V
aluminium

IP20

25°

SDCM2

L80

155K

0.16kg

adapter | 2700K | CRI >90 | 440lm

EUR

191,40

191,40

DALI-2

236,10

DALI-2

236,10

adapter | 3000K | CRI >90 | 470lm

EUR

191,40

191,40

DALI-2

236,10

DALI-2

236,10

housing | inner reflector colour

W

WM

E

M

H

Q

BQ

CH

B

CODE

W

WM

E

M

H

Q

BQ

CH

B

only for ceiling surface and suspended tracks

back



MODULE

48V system



1.0 DOT

LED PCB 9W | 48V
PC adapter | cover
PC lens

IP20 24° UGR≤19 SDCM3 L80/60K 0.11kg


non dim

	EUR
	275,60
	275,60

DALI

	EUR
	342,20
	342,20

LIGHT COLOUR	LUMEN CRI	CODE
2700K	790 >90	3
3000K	880 >90	5



1.0 OPAL

LED PCB 12W | 48V
PC adapter | cover
PMMA opal cover

IP20 SDCM3 L80/60K 0.16kg


non dim

	EUR
	186,20
	186,20

DALI

	EUR
	227,80
	227,80

LIGHT COLOUR	LUMEN CRI	CODE
2700K	610 >90	3
3000K	630 >90	5



2.0 OPAL

LED PCB 24W | 48V
PC adapter | cover
PMMA opal cover

IP20 SDCM3 L80/60K 0.32kg

non dim

	EUR
	269,40
	269,40

DALI

	EUR
	309,90
	309,90

LIGHT COLOUR	LUMEN CRI	CODE
2700K	1225 >90	3
3000K	1265 >90	5



dot



opal

back



ATCH

48V system



57 | 113 | 145



223




407



515 | 623



659



3.0


LED COB 8W | 48V | DALI-2
aluminium | PC adapter

IP20 A 33° SDCM2 L80/50K 0.18kg

	EUR
	286,00
	292,20
	289,10
	286,00

LIGHT COLOUR	LUMEN CRI	CODE
2700K	490 >90	3
3000K	520 >90	5

white fixture with white cable/adapter
other fixtures with black cable/adapter
more colour combinations on request



5.0

LED COB 8W | 48V | DALI-2
aluminium | PC adapter

IP20 A 33° SDCM2 L80/50K 0.23kg

	EUR
	297,40
	306,80
	301,60
	297,40

LIGHT COLOUR	LUMEN CRI	CODE
2700K	490 >90	3
3000K	520 >90	5


back



461



525

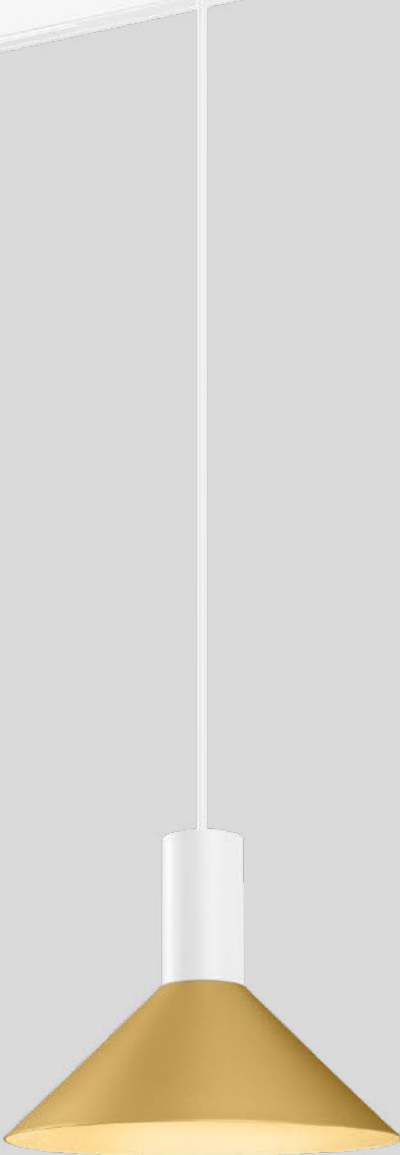

WW



GG



BB



WG




BG



GB

white fixture with white cable/adapter
other fixtures with black cable/adapter
more colour combinations on request




1.4

LED COB 7W | 48V | DALI-2
aluminium | PC adapter

IP20 32° SDCM2 L70|55K 0.32kg

	EUR	
	330,70	
	330,70	
	330,70	
	330,70	
	330,70	
	330,70	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	450 >90	3
3000K	470 >90	5



1.6


LED COB 7W | 48V | DALI-2
aluminium | PC adapter

IP20 32° SDCM2 L70|55K 0.70kg

	EUR	
	331,80	
	331,80	
	331,80	
	331,80	
	331,80	
	331,80	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	480 >90	3
3000K	505 >90	5

optional inner cover on page 816



1.7

LED COB 7 W | 48V | DALI-2
aluminium | PC adapter

IP20 32° SDCM2 L70|55K 0.34kg

	EUR	
	332,80	
	332,80	
	332,80	
	332,80	
	332,80	
	332,80	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	480 >90	3
3000K	505 >90	5

optional inner cover on page 816






OLI

48V system



409



1.0

LED COB 5W | 48V | DALI-2
aluminium | black cable
artisanal Italian hand blown glass
PC adapter

IP20 SDCM2 L80|50K 0.55kg

	EUR	
	401,40	
	401,40	
	351,50	

other cable lengths on request

LIGHT COLOUR	LUMEN CRI	CODE
2700K	280 >90	3
3000K	290 >90	5

back